

A robust floating nanoammeter

B. E. Sauer, D. M. Kara, J. J. Hudson, M. R. Tarbutt, and E. A. Hinds

Centre for Cold Matter, Blackett Laboratory, Imperial College London, Prince Consort Road, London SW7 2AZ, United Kingdom

(Received 3 October 2008; accepted 6 November 2008; published online 3 December 2008)

A circuit capable of measuring nanoampere currents while floating at voltages up to at least 25 kV is described. The circuit relays its output to ground potential via an optical fiber. We particularly emphasize the design and construction techniques, which allow robust operation in the presence of high voltage spikes and discharges. © 2008 American Institute of Physics.

[DOI: [10.1063/1.3036985](https://doi.org/10.1063/1.3036985)]

It is occasionally necessary to measure nanoampere or smaller currents flowing in a part of a circuit at high voltage. It is often easiest to do so by making a measurement of the ground return current of the high voltage supply,¹ but occasionally, this is inconvenient. Our particular application stems from an experiment to measure the permanent electric dipole moment of the electron,^{2,3} in which voltages of up to ± 12 kV are applied to electric field plates in order to polarize a beam of YbF molecules. A leakage current larger than about 10 nA between the field plates is a source of systematic error in the experiment. It is desirable to measure directly this plate leakage current, which is orders of magnitude smaller than the total current drawn from the high voltage supply. Most of this current does not contribute to the possible systematic error but flows to ground through various divider chains and bleed resistors, which are part of the high voltage circuit.

The obvious solution is to float the sensitive measurement circuitry at high voltage and communicate its output optically to a recording instrument at ground potential.⁴ This can be done with varying levels of sophistication. Some methods that have been implemented include a floating analog-to-digital converter and universal asynchronous receiver/transmitter (UART) for parallel to serial conversion with transmission via an optical fiber link,⁵ voltage-to-frequency conversion followed by optical transmission,⁶ and direct voltage transmission through a commercial optically isolated buffer amplifier.⁷ This last method is limited to a few kilovolts. In contrast, a glass or plastic optical fiber link can withstand very large potential differences.

We built a number of different floating ammeters and found that there are two issues that tend to limit performance: the power supply for the floating circuitry and the failure of semiconductor components after high voltage discharges. The first is the easier to solve. For an instrument used intermittently, battery power is a simple solution. We had success using both disposable alkaline and rechargeable lead acid batteries. In the electron electric dipole moment experiment, however, the flattening of the supply batteries is not acceptable because the ammeter is required to run continuously for days. Instead it is powered by a solar cell mounted a few centimeters from a bank of high power light-emitting diodes (LEDs). This is remarkably inefficient, with some 30 W of electrical power required to power the red

LED array,⁸ while the solar cell delivers less than 0.5 W to the ammeter circuit. The solar cell has higher conversion efficiency for green rather than red light, but this is more than compensated by the higher output power available from red LEDs. We find this method of powering the ammeter perfectly reliable. The solar cell power does entail the slight complication of single polarity supply, but Fig. 1 shows one way to bias the input circuitry in order to record bipolar currents. Isolated dc to dc converters are available commercially and would be preferable as power sources for circuits that only need to float at a few kilovolts. Other methods to deliver power to the high voltage instrument are isolation transformers or small dc motors coupled via a dielectric shaft and run as a motor-generator pair. We have not implemented these latter solutions.

Failure of the ammeter due to high voltage events proved to be a more serious issue. We designed and built several ammeters that have broken down in spectacular fashion. Figure 1 shows the front end of an ammeter that was designed to solve this problem. It was extensively tested with a spark gap load, which triggered between 5 and 10 kV.⁹ Ammeters of this design have not failed in over a year of actual operation in our laboratory. Note that in this circuit the op-amp is configured as a simple voltage buffer rather than as a transresistance amplifier. This means that current surges should flow through the protective elements rather than the op-amp. The 10 k Ω resistor in series with the op-amp input serves solely to isolate the op-amp from the high voltage (HV) current path. The sensitivity of the ammeter is determined by the current sensing resistor, R_{sense} , which is typically between 0.1 and 10 M Ω . The varistor (Littlefuse V18ZA1) has a very large resistance below 10 V, dropping to about 1 M Ω at 15 V and 2 k Ω at 20 V. The gas discharge element provides a circuit path for very large current spikes.

For the optical link, our device uses multimode plastic fiber and an Avago HFBR 1521/2521 transmitter/receiver pair. The optical transmitter dominates the power consumption in the circuit, thus no special effort was made to save power elsewhere in the circuit. To conserve power the optical transmitter drive was reduced to a level that was just able to drive a 0.5 m multimode fiber. This length was adequate to reach an optical repeater operating at high power near ground potential. The venerable LM358 was found to be adequate as an amplifier, though there is no reason that any

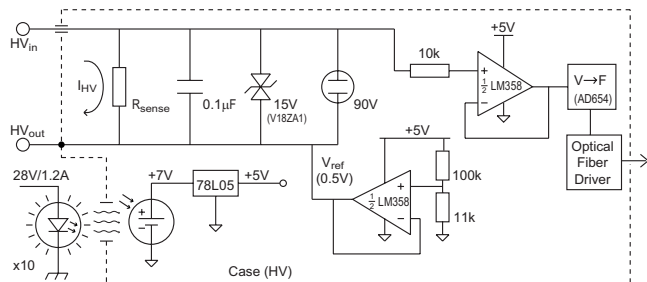


FIG. 1. The nanoammeter circuit, with some of the details of the input circuitry shown explicitly. Not shown is the standard circuitry associated with the voltage to frequency converter and optical fiber driver. A number of capacitors have been omitted for clarity. The expected path for the high voltage current I_{HV} is shown explicitly. The Faraday case (see text) is tied to the terminal labeled “HV_{out}.” The bias scheme for the sense resistor places the high voltage common 0.5 V below the case, as is appropriate for the AD654 voltage-to-frequency converter. The ten high power LEDs that drive the solar cell are wired in series.

of the multitude of modern micropower amplifiers would not prove to be equally effective. Figure 1 shows an Analog Devices AD654 as the voltage-to-frequency converter. This particular device has an input range of 0–1 V, thus one side of the sense resistor is biased to 0.5 V in order to be sensitive to bipolar currents. We also constructed ammeters using components from other manufacturers, for which the details of the biasing scheme were different. For the circuit in Fig. 1 with a sense resistor of 1 M Ω and a full scale V - F output of 200 kHz, the sensitivity of the ammeter is 200 Hz/nA.

Our first ammeter designs suffered from leakage from the ammeter components themselves. In our current design, all of the floating components are placed in a diecast aluminum box, which is attached to the high voltage output and acts as a Faraday cage. In turn, this box sits on nylon stand-offs inside a larger polycarbonate box. The high voltage connections are made through the top of the outer box, which is hermetically sealed to allow the possibility of filling the instrument with transformer oil or SF₆ to prevent breakdown. At voltages up to ± 25 kV this has not proved necessary. The ammeter circuit board itself is coated with anticorona lacquer.

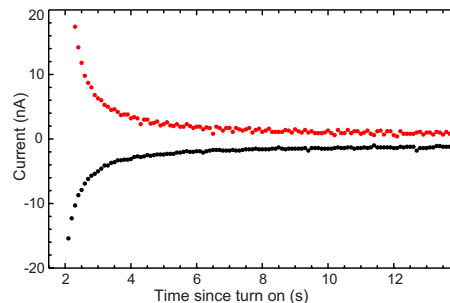


FIG. 2. (Color online) Currents recorded as a pair of electrodes are charged to ± 7 kV. The pulse output from the floating nanoammeters was recorded in 50 ms bins every 100 ms. The first 2 s of the charging currents (some of which is out of range) are not shown.

Figure 2 illustrates the performance of a pair of floating ammeters. It shows the charging currents that flow after the polarity of a pair of electric field plates is switched. The charging time constants are determined by the combined capacitance of the plates and their connecting cables and a series resistor, which limits the peak current. Note that the residual leakage current is very small, less than 2 nA. These leakage data are recorded continuously as part of the experiment to measure the electron electric dipole moment. Detailed circuit diagrams are available from the authors upon request.

- ¹J. P. Jacobs, W. M. Klipstein, S. K. Lamoreaux, B. R. Heckel, and E. N. Fortson, *Phys. Rev. A* **52**, 3521 (1995).
- ²J. J. Hudson, B. E. Sauer, M. R. Tarbutt, and E. A. Hinds, *Phys. Rev. Lett.* **89**, 023003 (2002).
- ³B. E. Sauer, H. T. Ashworth, J. J. Hudson, M. R. Tarbutt, and E. A. Hinds, *AIP Conf. Proc.* **869**, 44 (2006).
- ⁴The basic idea is shown in Fig. 9 of the datasheet for the AD654. (Analog Devices: www.analog.com).
- ⁵J. W. Pearce, *Rev. Sci. Instrum.* **49**, 1562 (1978).
- ⁶J.-w. Li, L.-w. Xu, X.-n. Liu, and L. Yang, *Plasma Science and Technology* **4**, 1281 (2002).
- ⁷B. Jatusziwer and C. M. Kahla, *Rev. Sci. Instrum.* **60**, 1197 (1989).
- ⁸Ten *LumiLeds* Luxeon LXHL-LD3C high power red LEDs, wired in series.
- ⁹A simple adjustable spark gap can be made with sharpened machine screws and a wooden block.