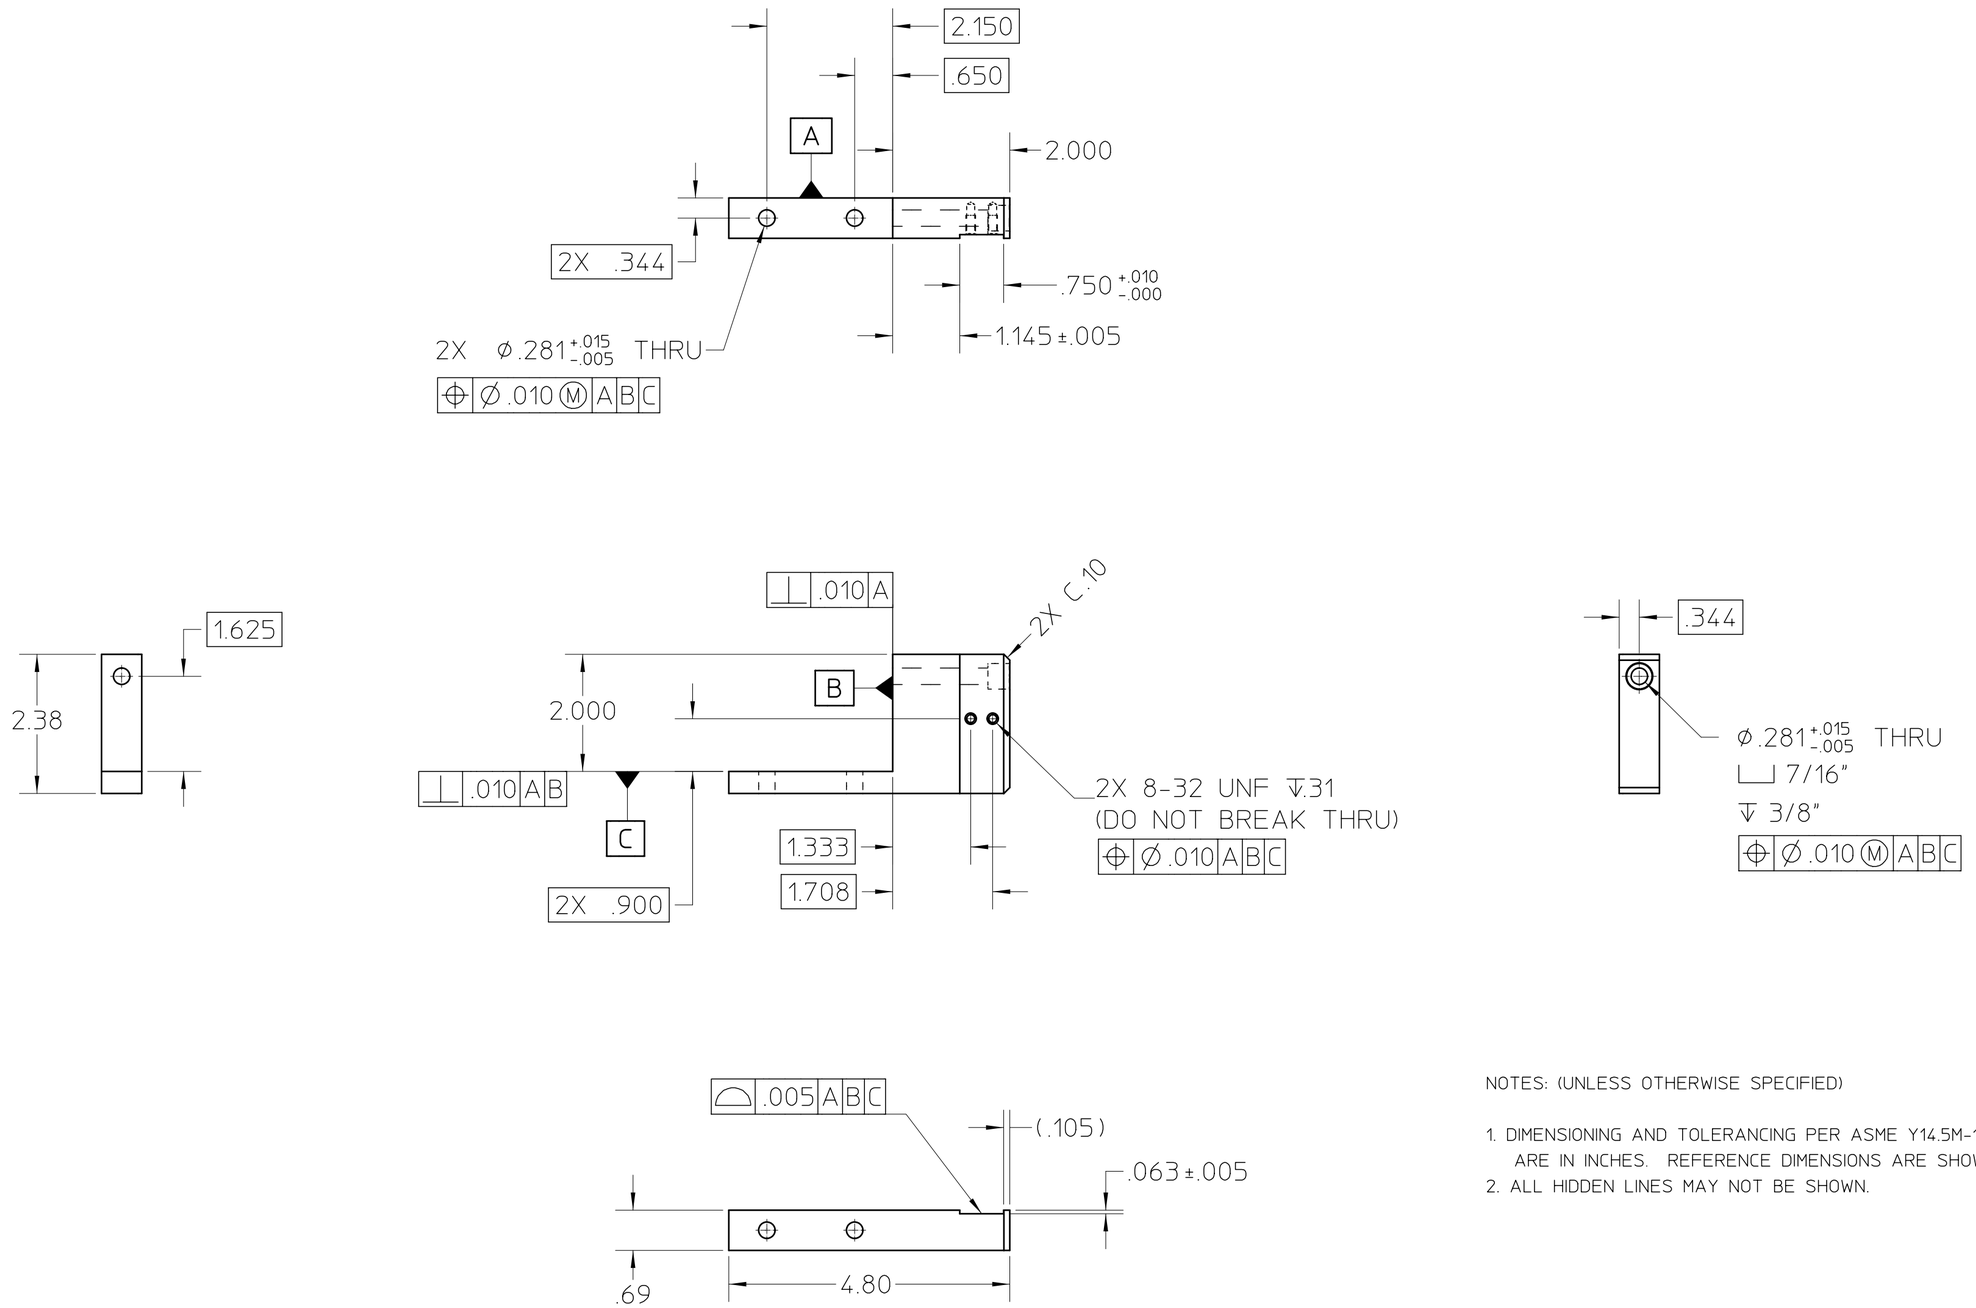

26A7343A

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994. ALL DIMENSIONS ARE IN INCHES. REFERENCE DIMENSIONS ARE SHOWN IN PARENTHESIS.
2. ALL HIDDEN LINES MAY NOT BE SHOWN.

MAT 2: ,	NOTES:
MAT 1: BLOCK, ALUMINUM 6061	NOTES:

REV	ZONE	CHANGES	DWG BY	DATE	CHK BY	DATE	APP BY	DATE

UNLESS OTHERWISE SPECIFIED

TOLERANCES			
	.X ± .1	FRAC. ± -	
	.XX ± .01	ANGLES ± .5°	
	.XXX ± .005	FINISH 125√	

THREADS ARE CLASS 2
CHAMFER ENDS OF ALL SCREW THREADS 30°.
CUT 1.5 PITCH THRD RELIEF WITH ROUND NOSE TOOL ON MACHINE CUT THREADS.
BREAK EDGES .016 MAX. ON MACHINED WORK
REMOVE BURRS WELD SPLATTER & LOOSE SCALE
REFERENCES: ANSI Y14.5 & B46.1.

SHOP ORDERS

ACCT. NO.		SERIAL NO.	
DATE ISSD.	DATE REQD.	NO REQD.	
DELIVER TO		IDENT METH.	SEE NOTES
SURFACE TREATMENT	BLACK ANODIZE		
DWG. BY	ajdemell	DATE	05-27-2003
CHK. BY	ajdemell	DATE	06-12-2003
APP. BY	kelez	DATE	06-12-2003

LAWRENCE BERKELEY LABORATORY
UNIVERSITY OF CALIFORNIA-BERKELEY

LIGHT SOURCE - BEND MAGNET BEAMLINES

BL 12.3.1 END STATION

LOWER TRIP DOG MOUNT, EUCHNER SWITCH

PATENT CLEAR	DWG. TYPE DETAIL	SHOWN ON	SCALE 1 : 2	DO NOT SCALE PRINTS
MICROFILMED	DESIGN ACCT. NO. -	CATEGORY CODE AL6193	DWG. NO. 26A7343	SIZE / REV. A

SHEET 1 OF 1

AUTO GENERATED PDF – Jun 12 2003 15:41:51 PDT