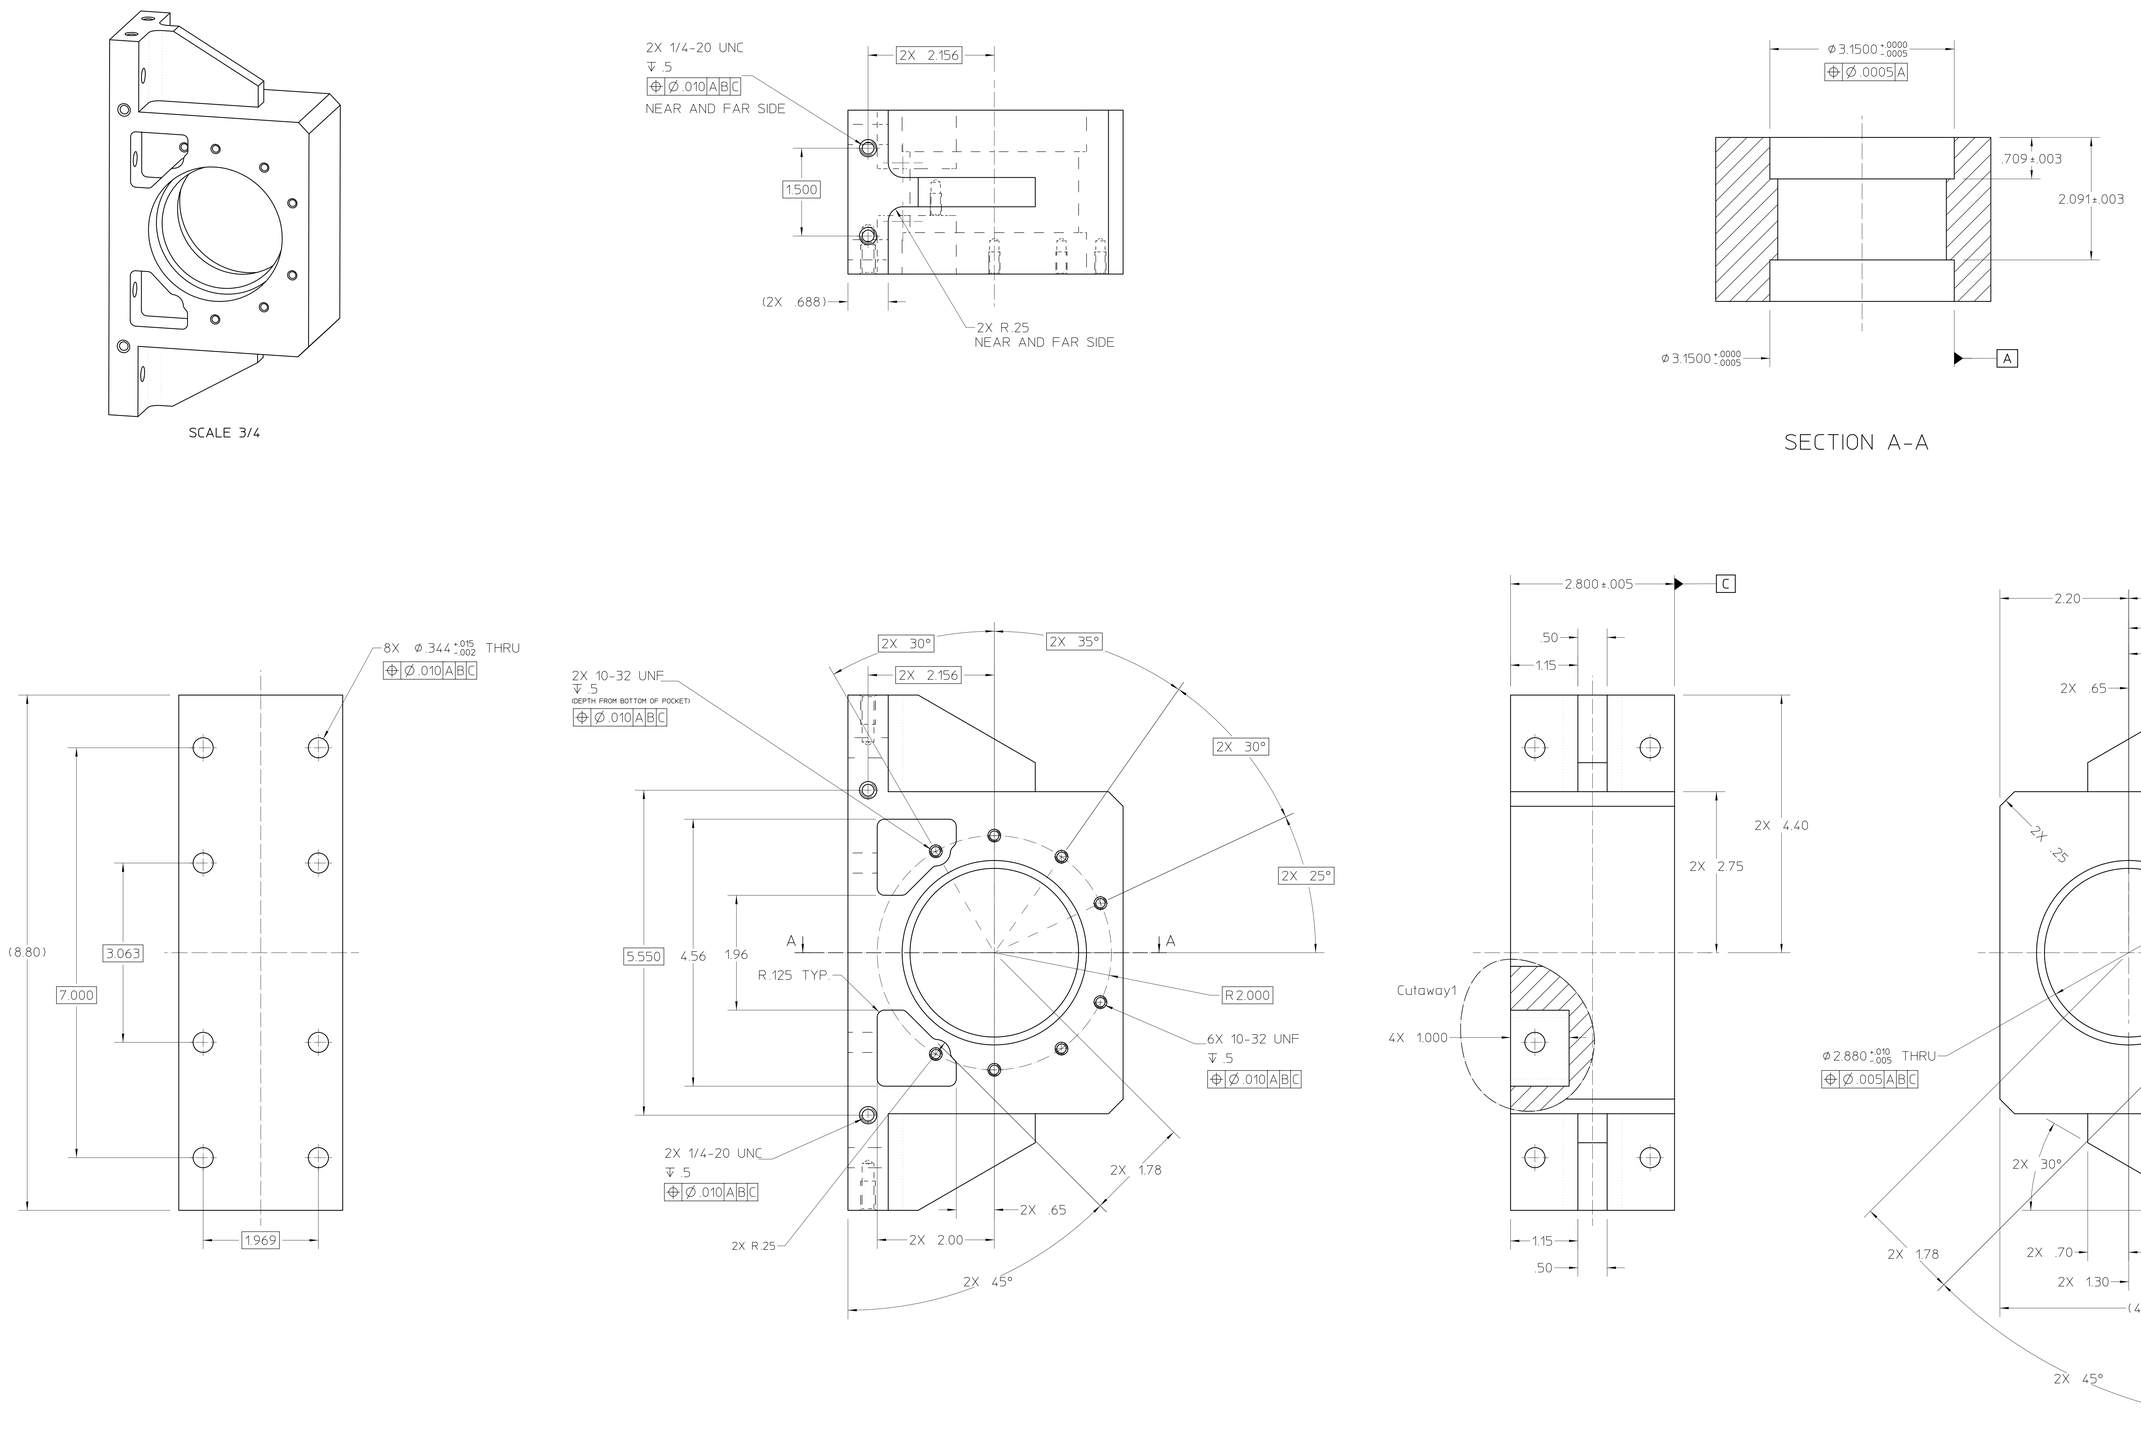

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. ALL HIDDEN LINES MAY NOT BE SHOWN.

REV	ZONE	CHANGES	DWG BY	DATE	CHK BY	DATE	APP BY	DATE

UNLESS OTHERWISE SPECIFIED
TOLERANCES: X ± .1 FRAC. ± - ; .XX ± .02 ANGLES ± .5° ; .XXX ± .010 FINISH 125
THREADS ARE CLASS 2
CHAMFER ENDS OF ALL SCREW THREADS 30°
CUT 1.5 PITCH THRD RELIEF WITH ROUND NOSE TOOL ON MACHINE CUT THREADS.
BREAK EDGES .016 MAX. ON MACHINED WORK.
REMOVE BURRS WELD SPLATTER & LOOSE SCALE
REFERENCES: ANSI Y14.5 & B46.1.

SHOP ORDERS
ACCT. NO. | SERIAL NO.
DATE ISSD. | DATE REQD | NO. REQD
DELIVER TO | IDENT METH | SEE NOTES
SURFACE TREATMENT BLACK ANODIZE
DWG BY ajdemell DATE 05-27-2003
CHK BY ajdemell DATE 06-12-2003
APP BY kelez DATE 06-12-2003

MAT 2: . NOTES:
MAT 1: BLOCK, ALUMINUM 6061 NOTES:

LAWRENCE BERKELEY LABORATORY
UNIVERSITY OF CALIFORNIA-BERKELEY
LIGHT SOURCE - BEND MAGNET BEAMLINES
BL 12.3.1 END STATION
ROTARY AXIS PILLOW BLOCK

PATENT CLEAR	DWG. TYPE	SHOWN ON	SCALE 1 : 1	DO NOT SCALE PRINTS
	DETAIL			
MICROFILMED	DESIGN ACCT. NO.	CATEGORY CODE	DWG. NO.	SIZE	REV.
	-	AL6193	26A7386	A	

SHEET 1 OF 1

AUTO GENERATED PDF – Jun 12 2003 15:42:11 PDT