

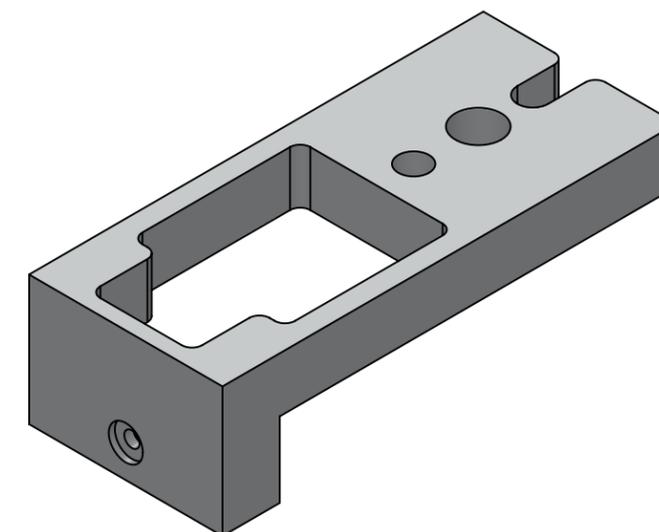
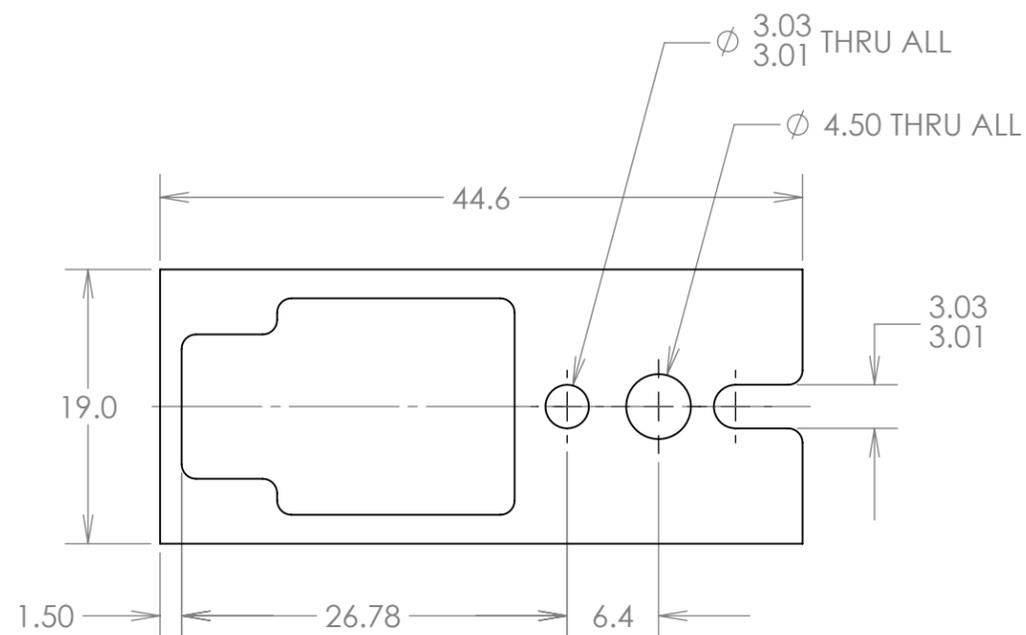


Some dimensions of interest called out here.
 Otherwise assume ±0.1 mm deviation from model.

REVISIONS				
REV	DWG	CHK	DATE	DESCRIPTION
0	JHS	JHS	2012-01-17	Initial drawing

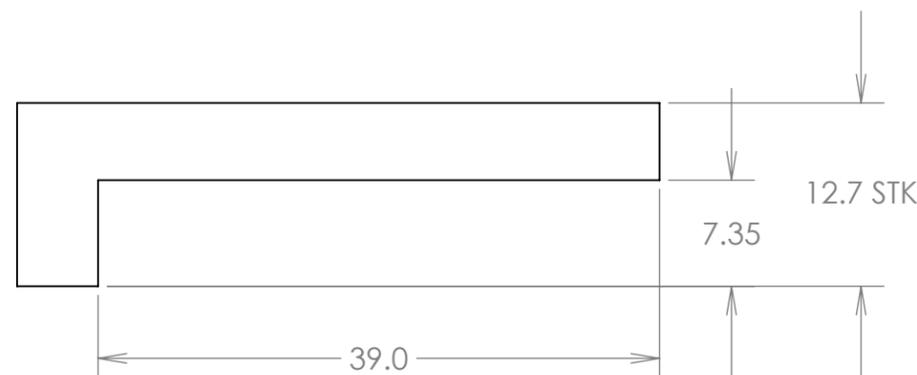

Configuration: **Cord Guide**

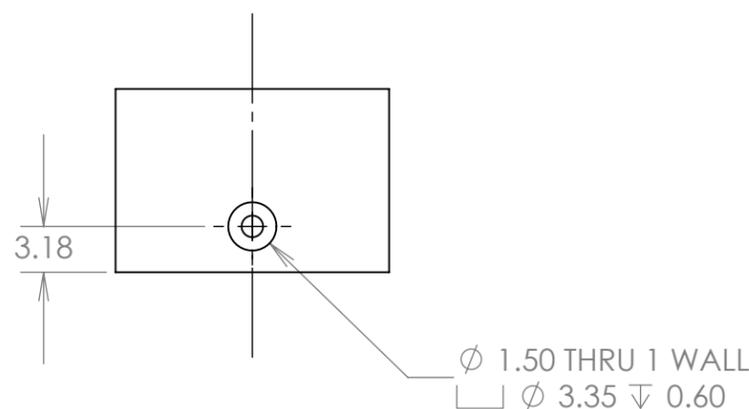


MATERIAL 6061-T6

SURFACE TREATMENT

DIMENSIONS IN MM. UNLESS OTHERWISE SPECIFIED:

TOLERANCES	X.X ± 0.5	FRAC. ± 1/64
	X.XX ± 0.1	ANGLES ± 1.00°
	X.XXX ± 0.05	FINISH $\sqrt[3.2]{\mu\text{m}}$



ERNEST ORLANDO LAWRENCE
BERKELEY NATIONAL LABORATORY
 UNIVERSITY OF CALIFORNIA - BERKELEY

Flexure_Mount_Corded

DWG BY Silber	DATE 2012-01-17
CHK BY Silber	DATE 2012-01-17
APR BY Silber	DATE 2012-01-17

THREADS ARE CLASS 2
 CHAMFER ENDS OF ALL SCREW THREADS 30°
 CUT ROUND, 1.5 THREAD RELIEF ON MACHINED THREADS
 BREAK EDGES .016 MAX. ON MACHINED WORK
 REMOVE BURRS, WELD SPLATTER & LOOSE SCALE
 IN ACCORDANCE WITH ASME Y14.5M & B46.1

SER NO.	SCALE: 2:1	SHEET 1 OF 1			
PROJECT NO.	PROJECT NAME	CATEGORY CODE	DWG NO. TBD 4	SIZE B	REV.