


Some dimensions of interest given here.  
 Unless otherwise specified max deviation ±0.5mm from model.  
 Waterjet finish is OK on profile, except face **A** where flatness is indicated.


REVISIONS				
REV	DWG	CHK	DATE	DESCRIPTION
0	JHS	JHS	2012-01-17	Initial drawing

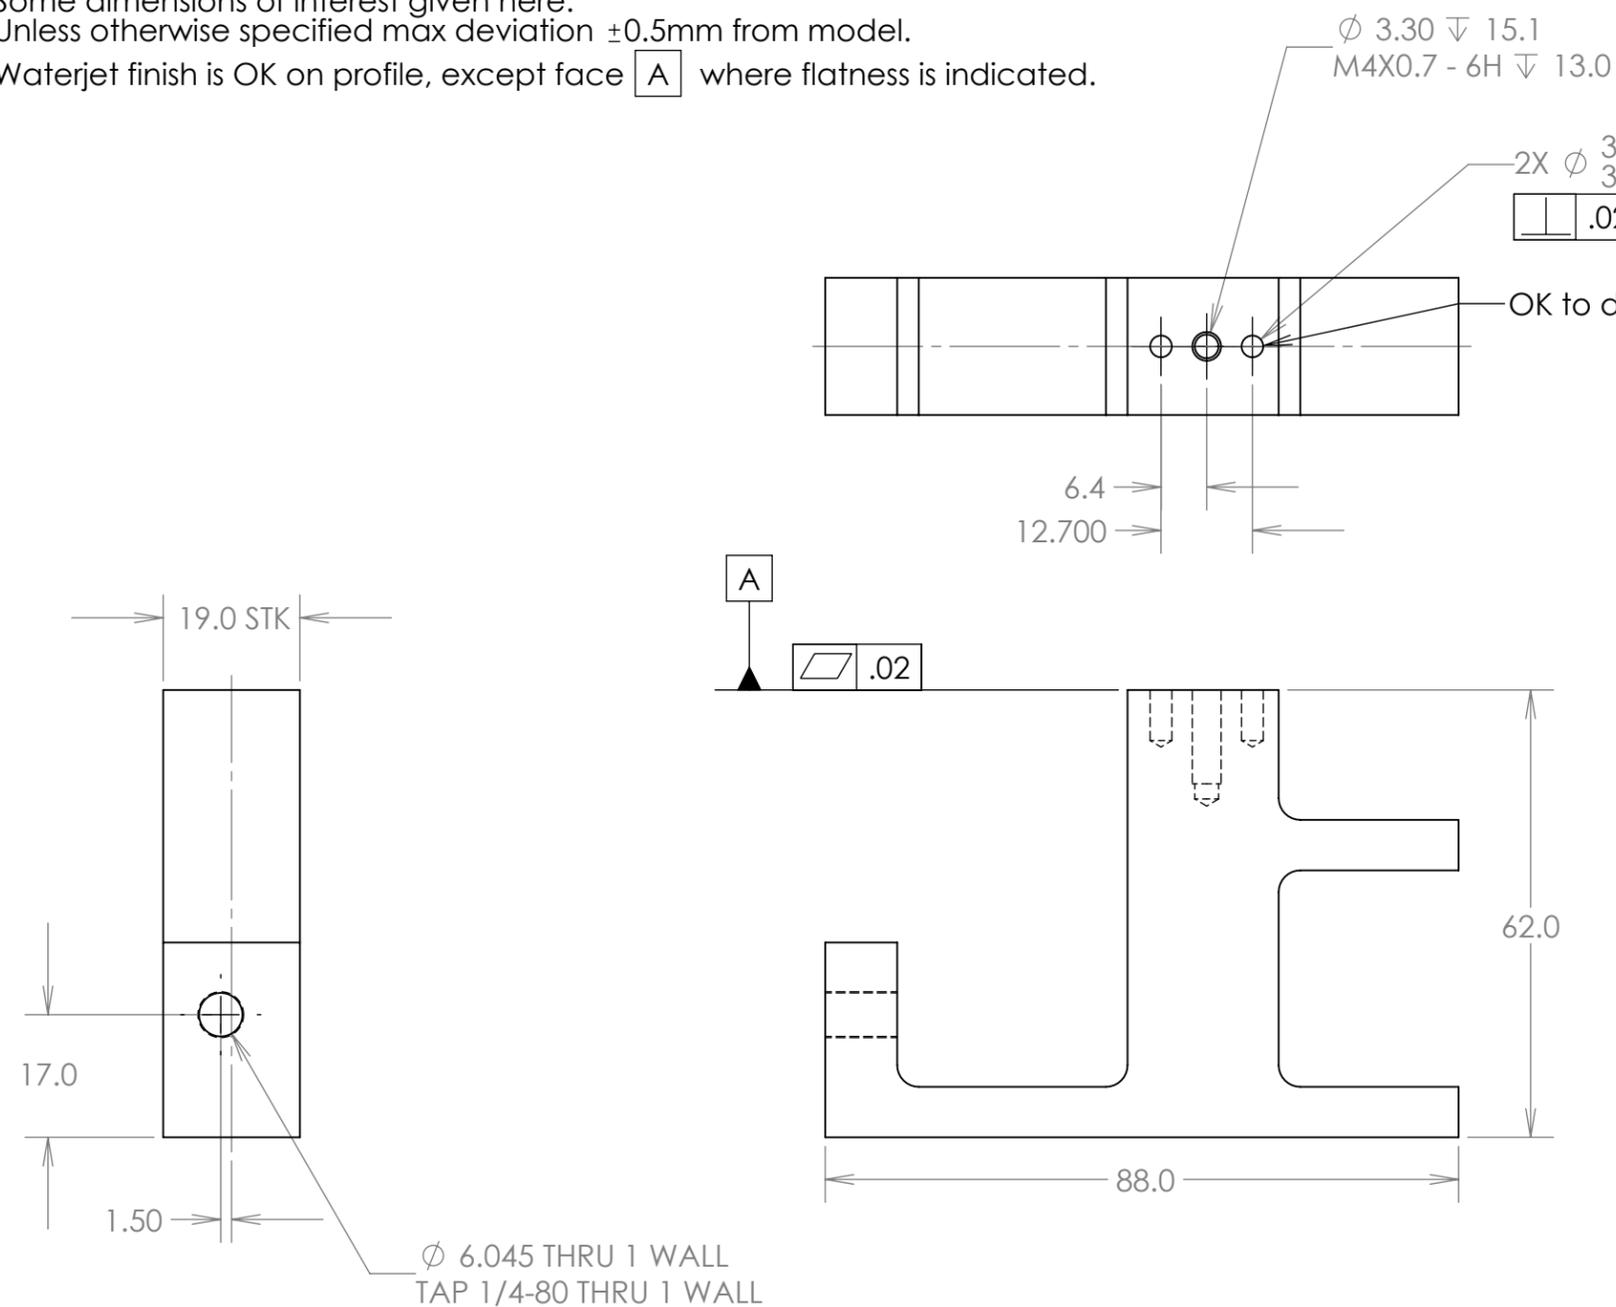

2X  $\phi$  3.03  
 3.01  $\nabla$  7.0  

$\square$	.02	A
-----------	-----	---

OK to drill deeper than reamed depth

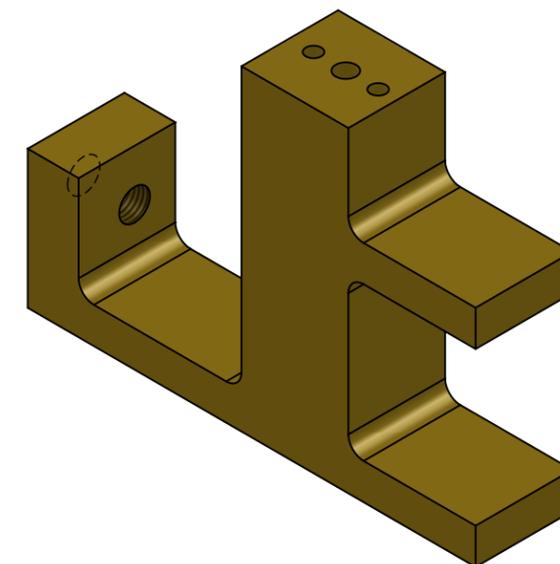

MATERIAL 360 Brass	
SURFACE TREATMENT	
DIMENSIONS IN MM. UNLESS OTHERWISE SPECIFIED:	
TOLERANCES	X.X ± 0.5
	X.XX ± 0.1
	X.XXX ± 0.05
FRAC. ± 1/64	
ANGLES ± 1.00°	
FINISH $\sqrt[3.2]{\mu\text{m}}$	

**ERNEST ORLANDO LAWRENCE**  
**BERKELEY NATIONAL LABORATORY**  
 UNIVERSITY OF CALIFORNIA - BERKELEY

Mic\_Mount\_Corded

DWG BY Silber	DATE 2012-01-17
CHK BY Silber	DATE 2012-01-17
APR BY Silber	DATE 2012-01-17

THREADS ARE CLASS 2  
 CHAMFER ENDS OF ALL SCREW THREADS 30°  
 CUT ROUND, 1.5 THREAD RELIEF ON MACHINED THREADS  
 BREAK EDGES .016 MAX. ON MACHINED WORK  
 REMOVE BURRS, WELD SPLATTER & LOOSE SCALE  
 IN ACCORDANCE WITH ASME Y14.5M & B46.1

SER NO.	SCALE: 1:1	<b>SHEET 1 OF 1</b>			
PROJECT NO.	PROJECT NAME	CATEGORY CODE	DWG NO.	SIZE	REV.
			TBD 2	B	0