MAXIMUM HORSEPOWER RATINGS FOR 3 PHASE MOTORS

VOLTAGE (V)	200V	230V	460V	575V
HORSEPOWER	250	300	600	800
MAXIMUM CURRENT	INDUCTIVE (AC3) -- 500A			
	RESISTIVE (AC1) -- 700A			
AUXILIARY CONTACTS BUILT-IN	NO -- 1*			
	NC -- 0			

*THIS ONE NORMALLY OPEN HOLDING CIRCUIT CONTACT IS INCORPORATED IN THE DESIGN OF THE COIL.

COIL VOLTAGES FOR EEC 500 TO EEC 780

SUFFIX	VOLTAGE (VAC)	FREQUENCY (Hz)	DC VOLTAGE (VDC)
-A	120	50/60	
-C	208 - 230	60	
-E	480/400	60/50	
-F	600*	60	-DCN = 24VDC
-D	380	50	-DCD = 48VDC
-G	24**	50/60	-DCP = 120VDC
-H	277 - 280	60	-DCR = 220VDC

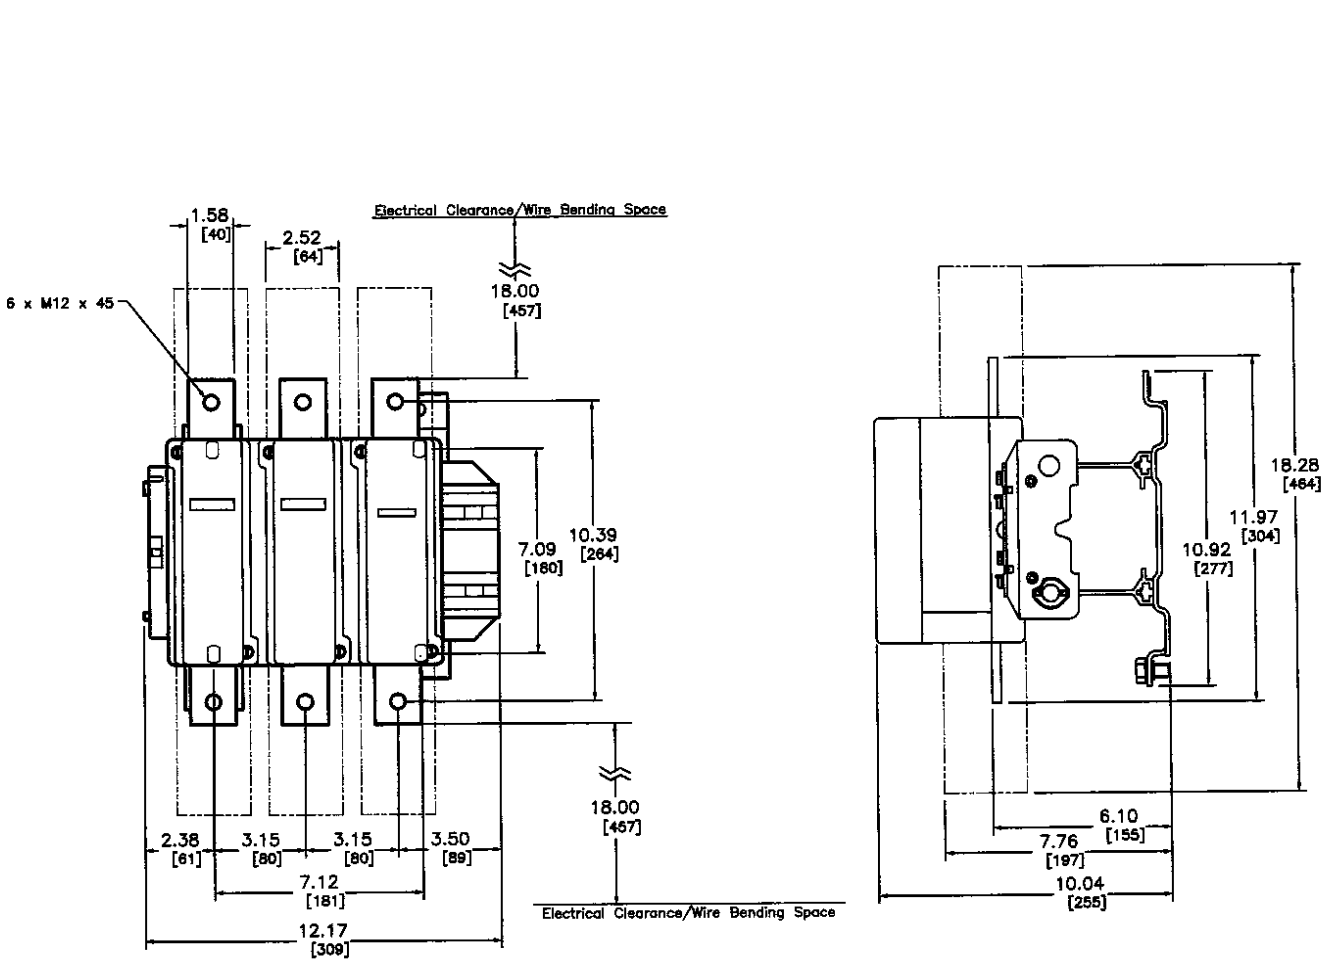

REV	DESCRIPTION	DATE	APP'D	DRAWN LR	Description
				CHECKED TG	**Dimension Drawing**
				APPROVED	**EEC630 AC/DC Operated**
				DATE 08/23/07	

Electrical and Electronic Controls, Inc.
3881 Danbury Rd
Brewster NY, 10509 USA
(845)-278-5777 Fax (845)-278-5444
Email: info@eecontrols.com
www.eecontrols.com

Drawing No. **EEC 630-AC_DC** REV. **0**

07/28/2008 16:06 FAX 8452785444 E E CONTROLS INC 001