NOTES (UNLESS OTHERWISE SPECIFIED):

1) DIMENSIONS IN INCHES.

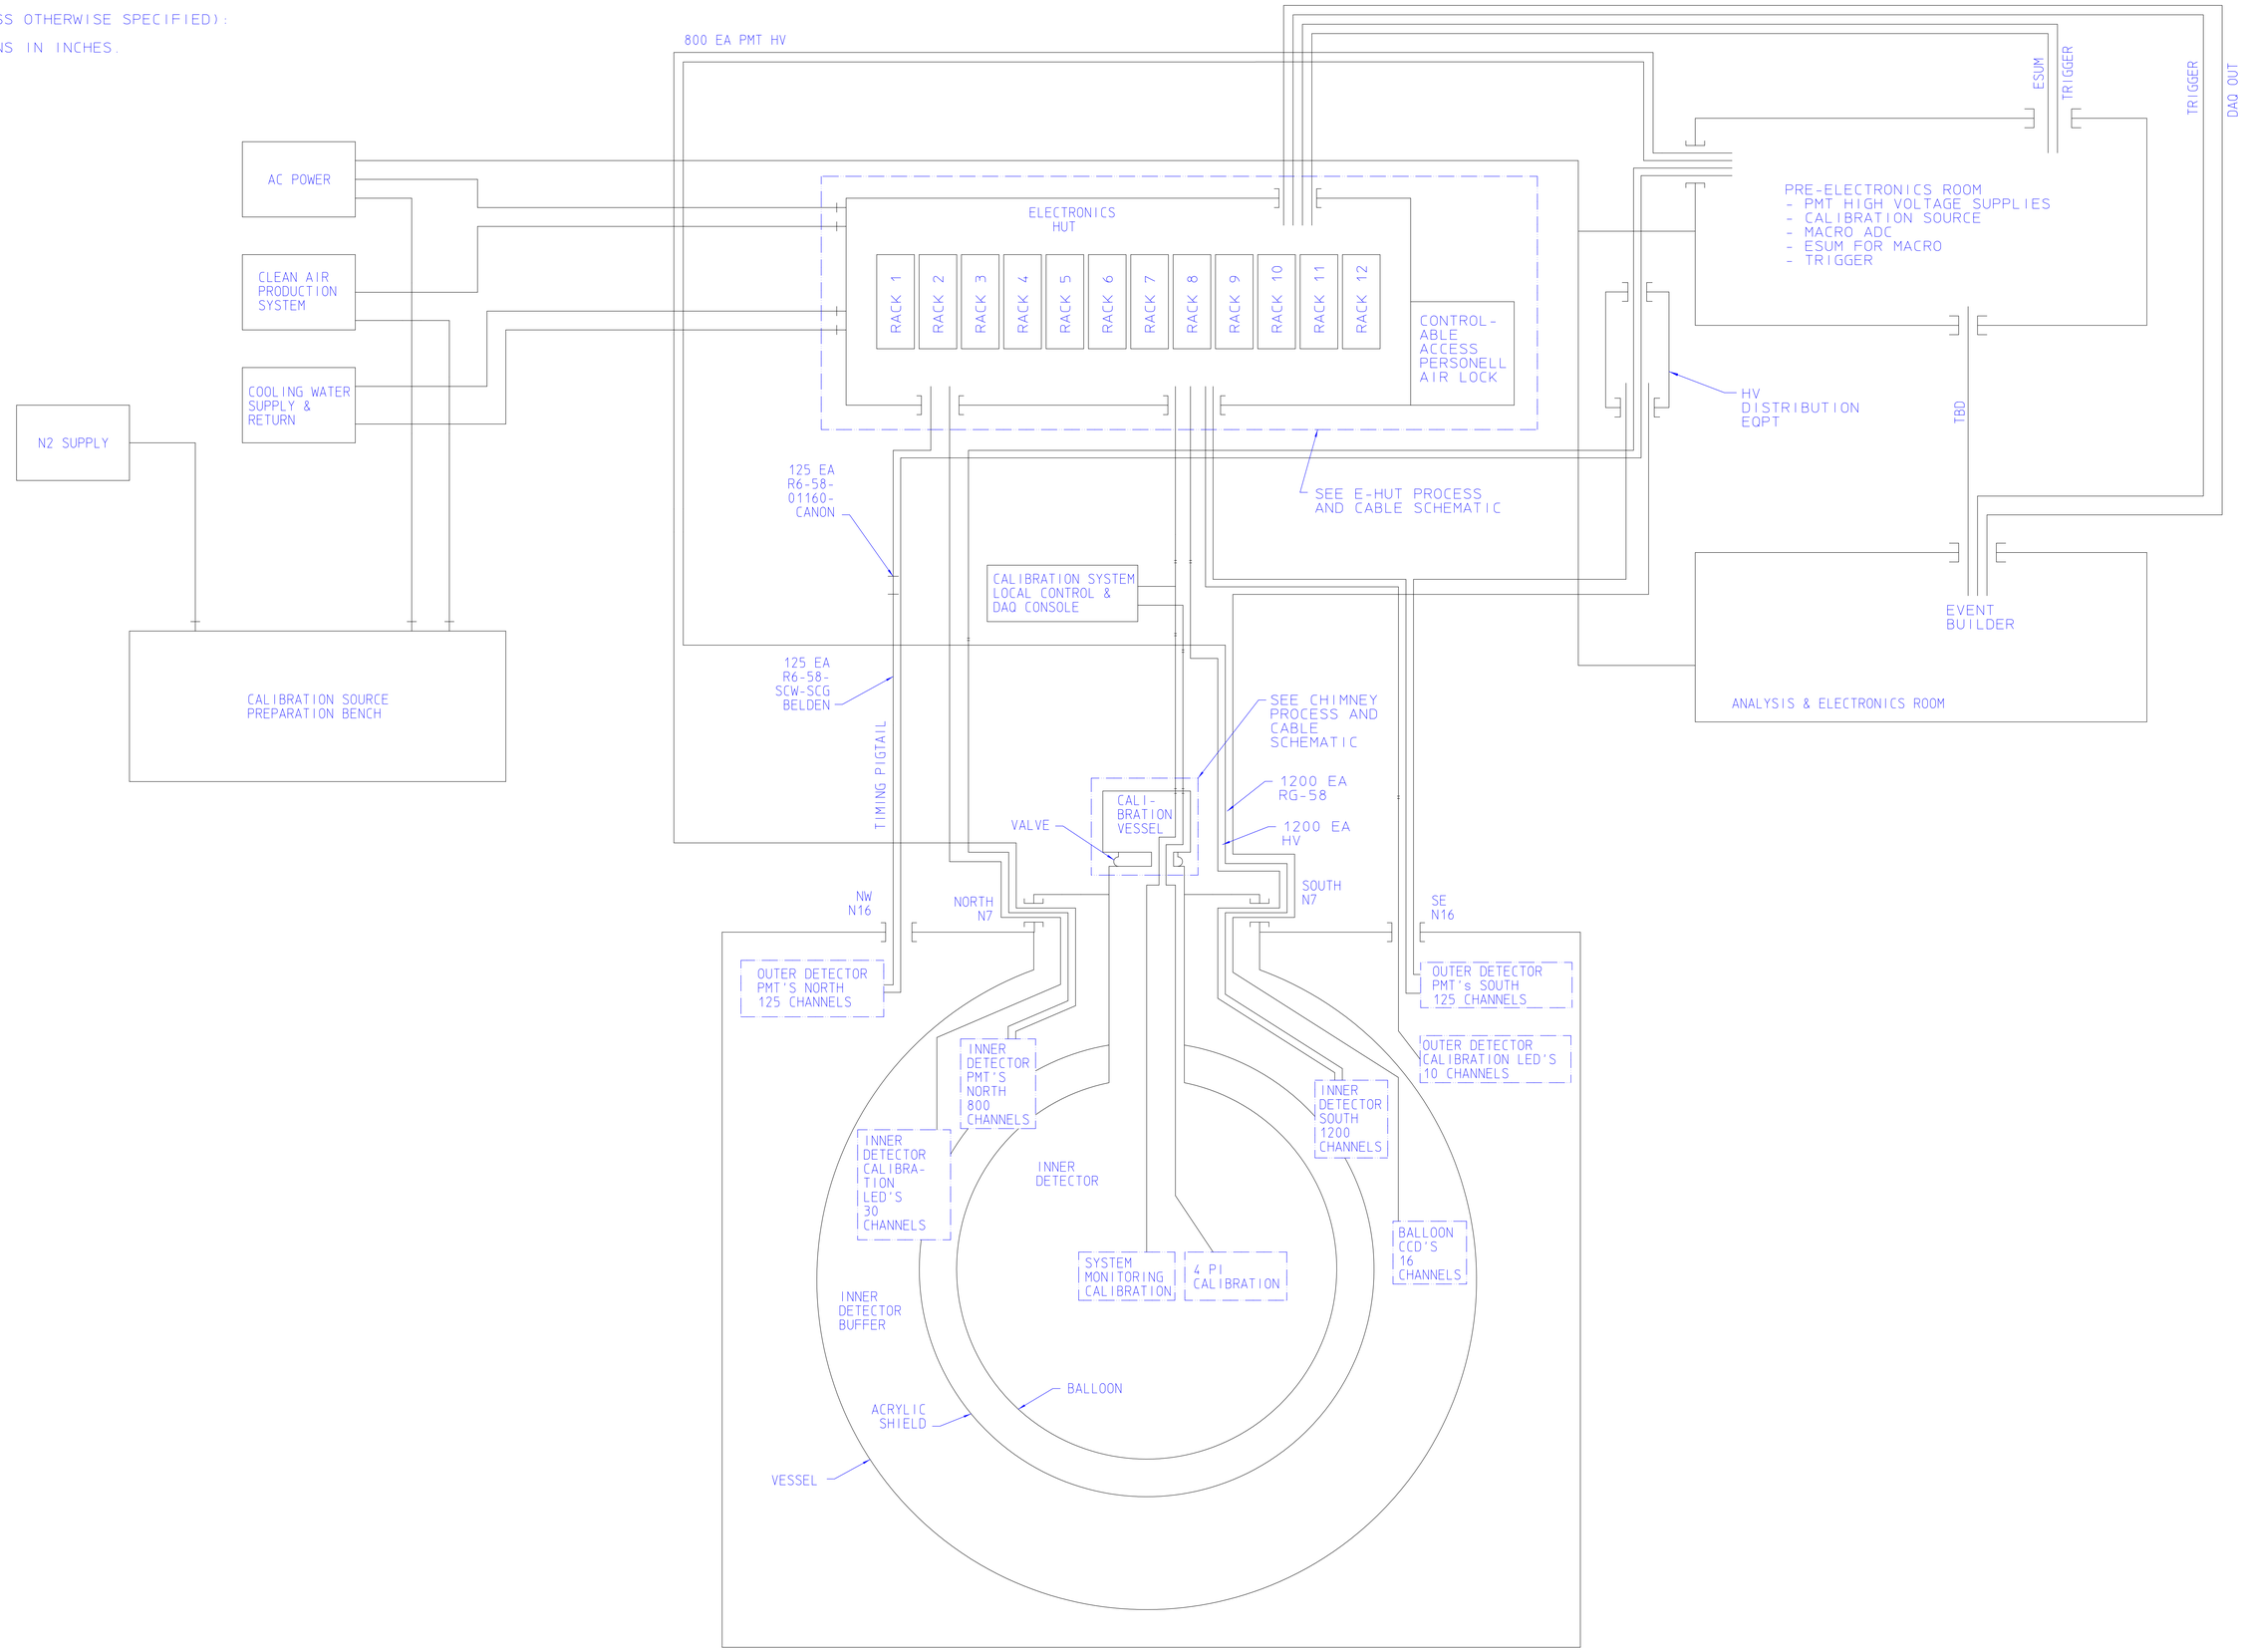

21F9226

ITEM	REQD	PART NO	DESCRIPTION

REV	DWG	CHK	ZONE	DATE	CHANGES

UNLESS OTHERWISE SPECIFIED

TOLERANCES: .X ± .1 | FRAC. ± 1/64 | .XX ± .01 | ANGLES ± 0.5° | .XXX ± .005 | FINISH 125

THREADS ARE CLASS 2
CHAMFER ENDS OF ALL SCREW THREADS 30°.
CUT 1.5 PITCH THRD RELIEF WITH ROUND NOSE TOOL ON MACHINE CUT THREADS.
BREAK EDGES .016 MAX. ON MACHINED WORK
REMOVE BURRS WELD SPLATTER & LOOSE SCALE
REF: ASME Y14.5M & ANSI B46.1.

SHOP ORDERS
ACCT. NO. | SERIAL NO.
DATE ISSD | DATE REQD. | NO. REQD.
DELIVER TO
SURFACE TREATMENT: CLEAN
IDENT. METH: TAG
DWG. BY: EB | DATE: 06-29-00
CHK. BY: CGF | DATE: 06-30-00

LAWRENCE BERKELEY NATIONAL LABORATORY
UNIVERSITY OF CALIFORNIA-BERKELEY

KamLAND
SYSTEM
CABLING SCHEMATIC

PATENT CLEAR | DWG. TYPE: ASSY | SHOWN ON | SCALE: FULL | DO NOT SCALE PRINTS
MICROFILMED | DESIGN ACCT. NO.: KLNK155 | CATEGORY CODE | DWG. NO.: 21F9226 | SIZE | REV: 0