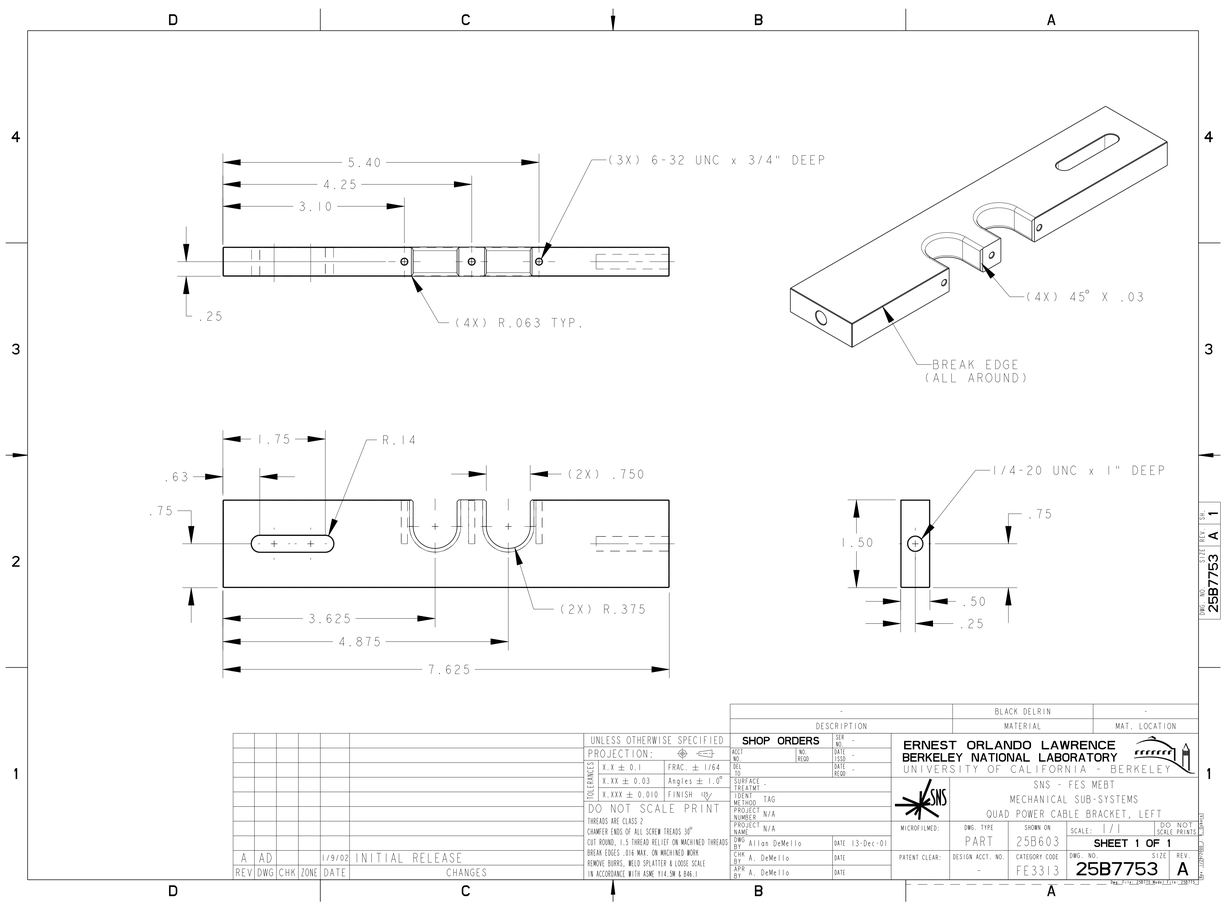

5.40
4.25
3.10
(3X) 6-32 UNC x 3/4" DEEP
.25
(4X) R.063 TYP.
(4X) 45° X .03
BREAK EDGE
(ALL AROUND)
1.75
R.14
.63
(2X) .750
.75
(2X) R.375
3.625
4.875
7.625
1/4-20 UNC x 1" DEEP
.75
1.50
.50
.25
DESCRIPTION
BLACK DELRIN
MATERIAL
MAT. LOCATION
UNLESS OTHERWISE SPECIFIED
PROJECTION:
TOLERANCES
X.X ± 0.1
FRAC. ± 1/64
X.XX ± 0.03
Angles ± 1.0°
X.XXX ± 0.010
FINISH 125
DO NOT SCALE PRINT
THREADS ARE CLASS 2
CHAMFER ENDS OF ALL SCREW TREADS 30°
CUT ROUND, 1.5 THREAD RELIEF ON MACHINED THREADS
BREAK EDGES .016 MAX. ON MACHINED WORK
REMOVE BURRS, WELD SPLATTER & LOOSE SCALE
IN ACCORDANCE WITH ASME Y14.5M & B46.1
SHOP ORDERS
ACCT NO.
NO. REQD
SER NO.
DATE
DEL TO
DATE REQD
SURFACE TREATMT
IDENT METHOD TAG
PROJECT NUMBER N/A
PROJECT NAME N/A
DWG BY Allan DeMello
DATE 13-Dec-01
CHK BY A. DeMello
DATE
APR BY A. DeMello
DATE
ERNEST ORLANDO LAWRENCE
BERKELEY NATIONAL LABORATORY
UNIVERSITY OF CALIFORNIA - BERKELEY
SNS - FES MEBT
MECHANICAL SUB-SYSTEMS
QUAD POWER CABLE BRACKET, LEFT
MICROFILMED:
DWG. TYPE PART
SHOWN ON 25B603
SCALE: 1/1
DO NOT SCALE PRINTS
SHEET 1 OF 1
PATENT CLEAR:
DESIGN ACCT. NO. -
CATEGORY CODE FE3313
DWG. NO. 25B7753
SIZE A
REV.
A AD 1/9/02 INITIAL RELEASE
REV DWG CHK ZONE DATE CHANGES
DWG. NO. 25B7753
SIZE A
REV. 1