

- Vessel design simplified.

- Vessel design simplified.
 - 3 parts instead of 4 - no service plate

- Vessel design simplified.
 - 3 parts instead of 4 - no service plate
 - plain torispheric heads, both ends, PMTs inside

- Vessel design simplified.
 - 3 parts instead of 4 - no service plate
 - plain torispheric heads, both ends, PMTs inside
- Vessel axis changed from vertical to horizontal

- Vessel design simplified.
 - 3 parts instead of 4 - no service plate
 - plain torispheric heads, both ends, PMTs inside
- Vessel axis changed from vertical to horizontal
 - reduces shielding height

- Vessel design simplified.
 - 3 parts instead of 4 - no service plate
 - plain torispheric heads, both ends, PMTs inside
- Vessel axis changed from vertical to horizontal
 - reduces shielding height
 - gives room for axial expansion (cabling)

- Vessel design simplified.
 - 3 parts instead of 4 - no service plate
 - plain torispheric heads, both ends, PMTs inside
- Vessel axis changed from vertical to horizontal
 - reduces shielding height
 - gives room for axial expansion (cabling)
 - cables and feedthroughs all above work platform

- Vessel design simplified.
 - 3 parts instead of 4 - no service plate
 - plain torispheric heads, both ends, PMTs inside
- Vessel axis changed from vertical to horizontal
 - reduces shielding height
 - gives room for axial expansion (cabling)
 - cables and feedthroughs all above work platform
- Vessel material changed to stainless steel, from titanium

- Vessel design simplified.
 - 3 parts instead of 4 - no service plate
 - plain torispheric heads, both ends, PMTs inside
- Vessel axis changed from vertical to horizontal
 - reduces shielding height
 - gives room for axial expansion (cabling)
 - cables and feedthroughs all above work platform
- Vessel material changed to stainless steel, from titanium
 - Not confident radiopure Ti available

- Vessel design simplified.
 - 3 parts instead of 4 - no service plate
 - plain torispheric heads, both ends, PMTs inside
- Vessel axis changed from vertical to horizontal
 - reduces shielding height
 - gives room for axial expansion (cabling)
 - cables and feedthroughs all above work platform
- Vessel material changed to stainless steel, from titanium
 - Not confident radiopure Ti available
 - Even so, not confident vessel kept clean throughout mfr.


- Vessel design simplified.
 - 3 parts instead of 4 - no service plate
 - plain torispheric heads, both ends, PMTs inside
- Vessel axis changed from vertical to horizontal
 - reduces shielding height
 - gives room for axial expansion (cabling)
 - cables and feedthroughs all above work platform
- Vessel material changed to stainless steel, from titanium
 - Not confident radiopure Ti available
 - Even so, not confident vessel kept clean throughout mfr.
 - High cost of Ti fab - limited mfrs, schedule risk

- Vessel design simplified.
 - 3 parts instead of 4 - no service plate
 - plain torispheric heads, both ends, PMTs inside
- Vessel axis changed from vertical to horizontal
 - reduces shielding height
 - gives room for axial expansion (cabling)
 - cables and feedthroughs all above work platform
- Vessel material changed to stainless steel, from titanium
 - Not confident radiopure Ti available
 - Even so, not confident vessel kept clean throughout mfr.
 - High cost of Ti fab - limited mfrs, schedule risk
 - Stainless (304, 316) available in the few mBq/kg range,


- Vessel design simplified.
 - 3 parts instead of 4 - no service plate
 - plain torispheric heads, both ends, PMTs inside
- Vessel axis changed from vertical to horizontal
 - reduces shielding height
 - gives room for axial expansion (cabling)
 - cables and feedthroughs all above work platform
- Vessel material changed to stainless steel, from titanium
 - Not confident radiopure Ti available
 - Even so, not confident vessel kept clean throughout mfr.
 - High cost of Ti fab - limited mfrs, schedule risk
 - Stainless (304, 316) available in the few mBq/kg range, SO:

- Vessel design simplified.
 - 3 parts instead of 4 - no service plate
 - plain torispheric heads, both ends, PMTs inside
- Vessel axis changed from vertical to horizontal
 - reduces shielding height
 - gives room for axial expansion (cabling)
 - cables and feedthroughs all above work platform
- Vessel material changed to stainless steel, from titanium
 - Not confident radiopure Ti available
 - Even so, not confident vessel kept clean throughout mfr.
 - High cost of Ti fab - limited mfrs, schedule risk
 - Stainless (304, 316) available in the few mBq/kg range, SO:
- A copper liner has been added to shield the higher background stainless steel


Main Cylindrical Vessel

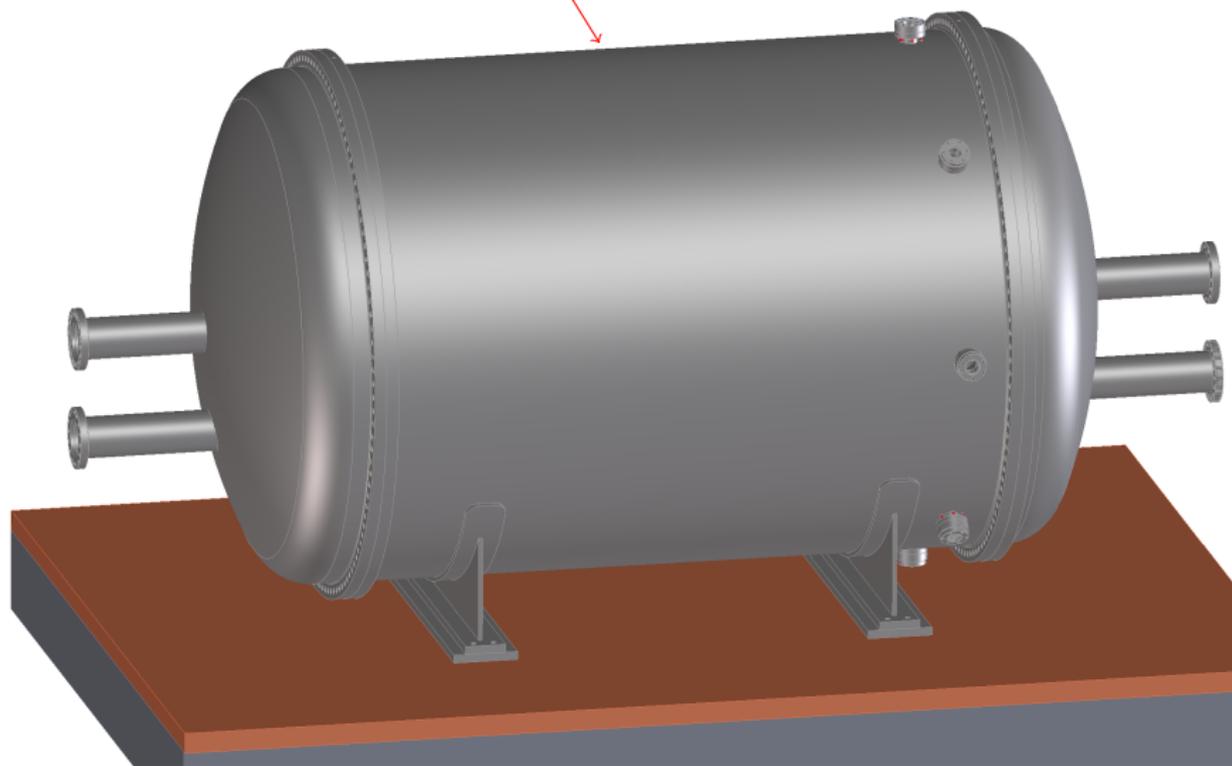


Main Cylindrical Vessel
Torispheric Heads

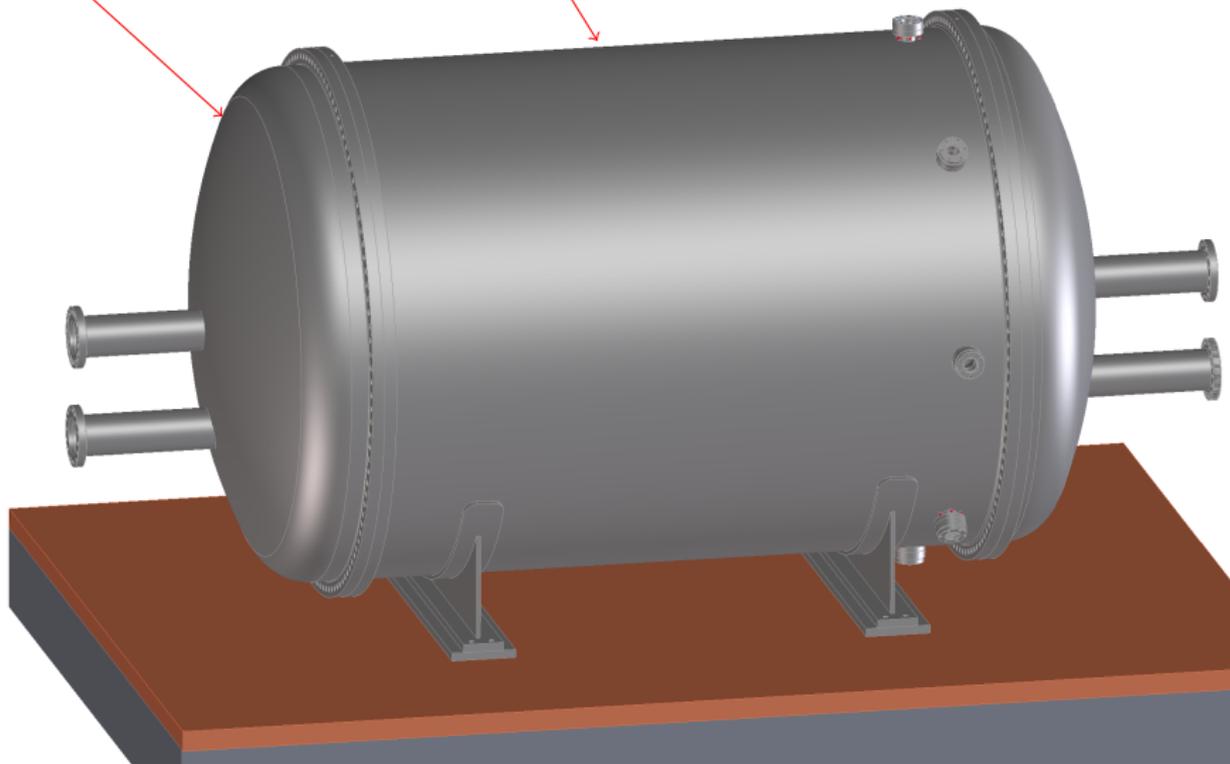

Main Cylindrical Vessel
Torispheric Heads
Main Flanges

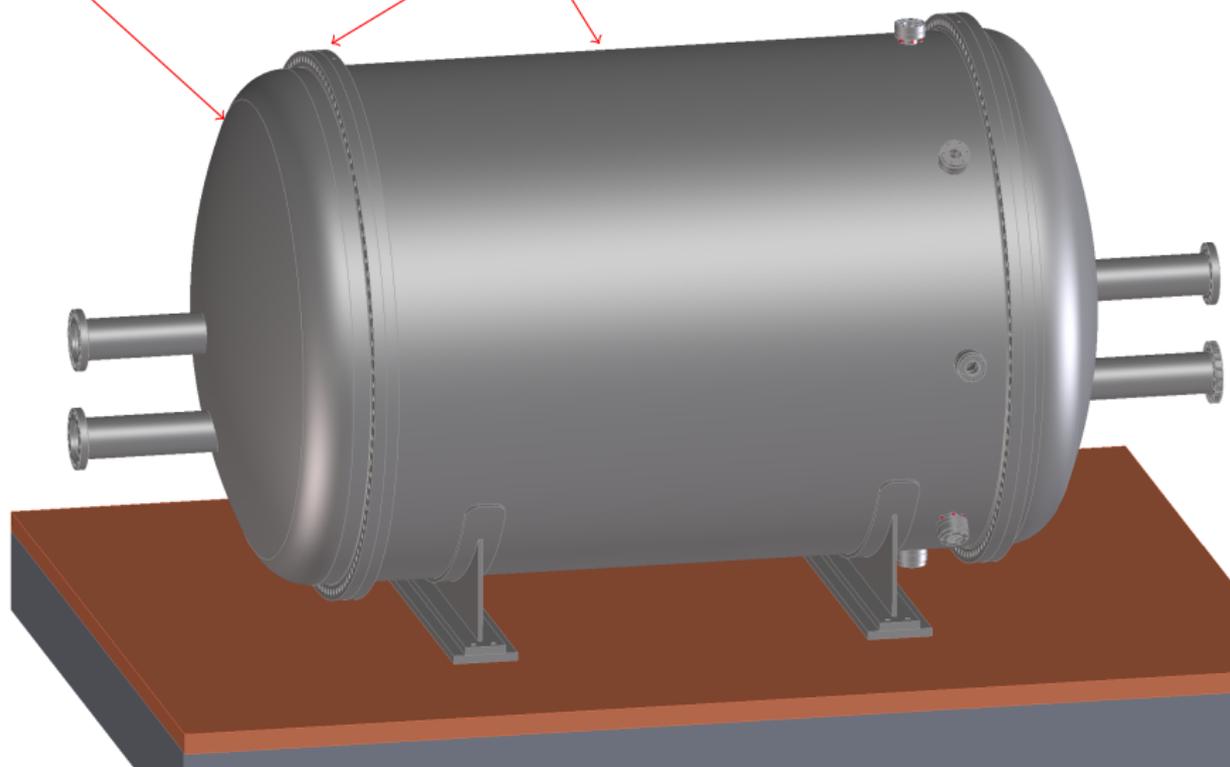

Main Cylindrical Vessel
Torispheric Heads
Main Flanges

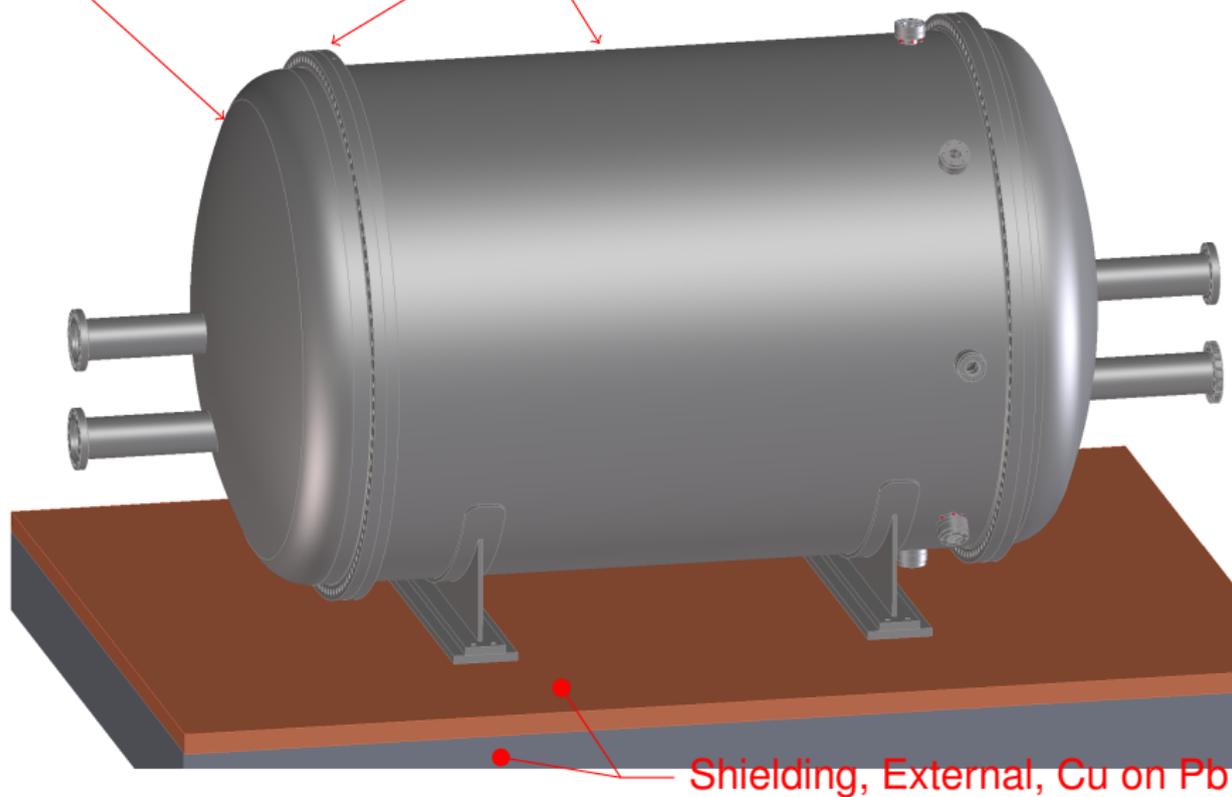


Main Cylindrical Vessel

Torispheric Heads

Main Flanges

Axial Nozzle

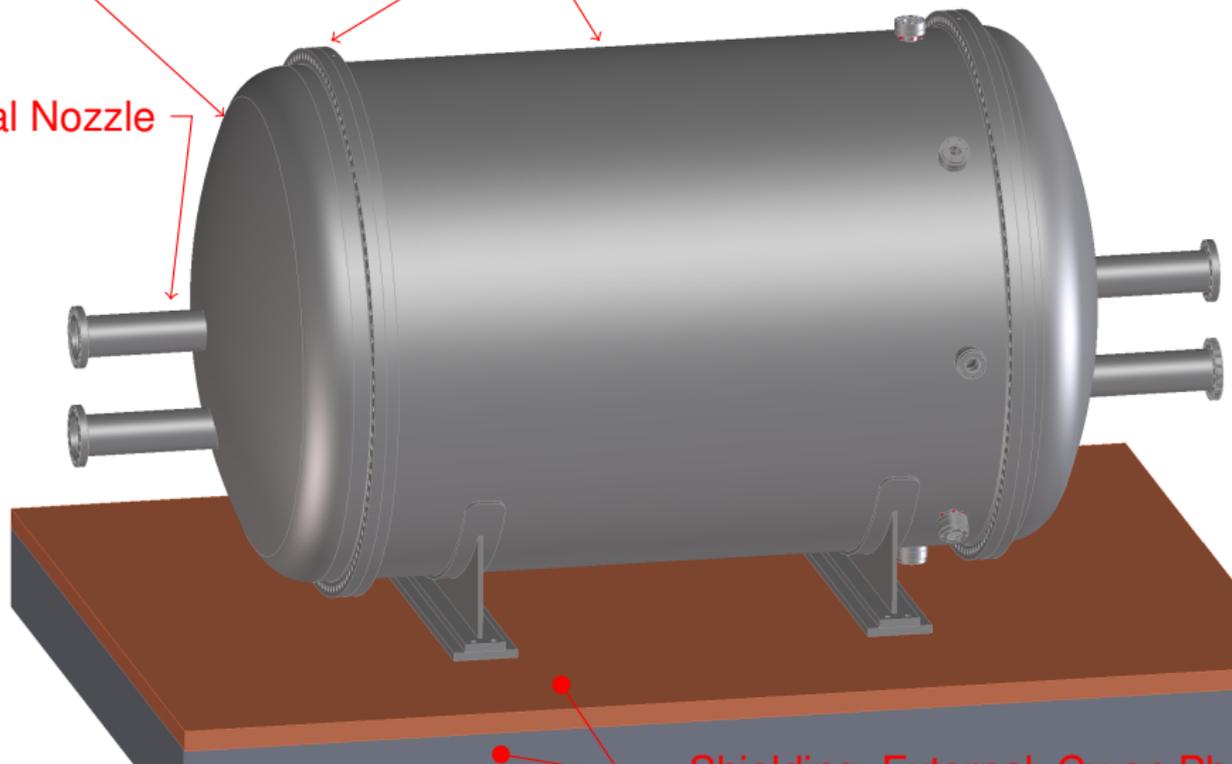

Shielding, External, Cu on Pb


Main Cylindrical Vessel

Torispheric Heads

Main Flanges

Axial Nozzle

Aux. Nozzle

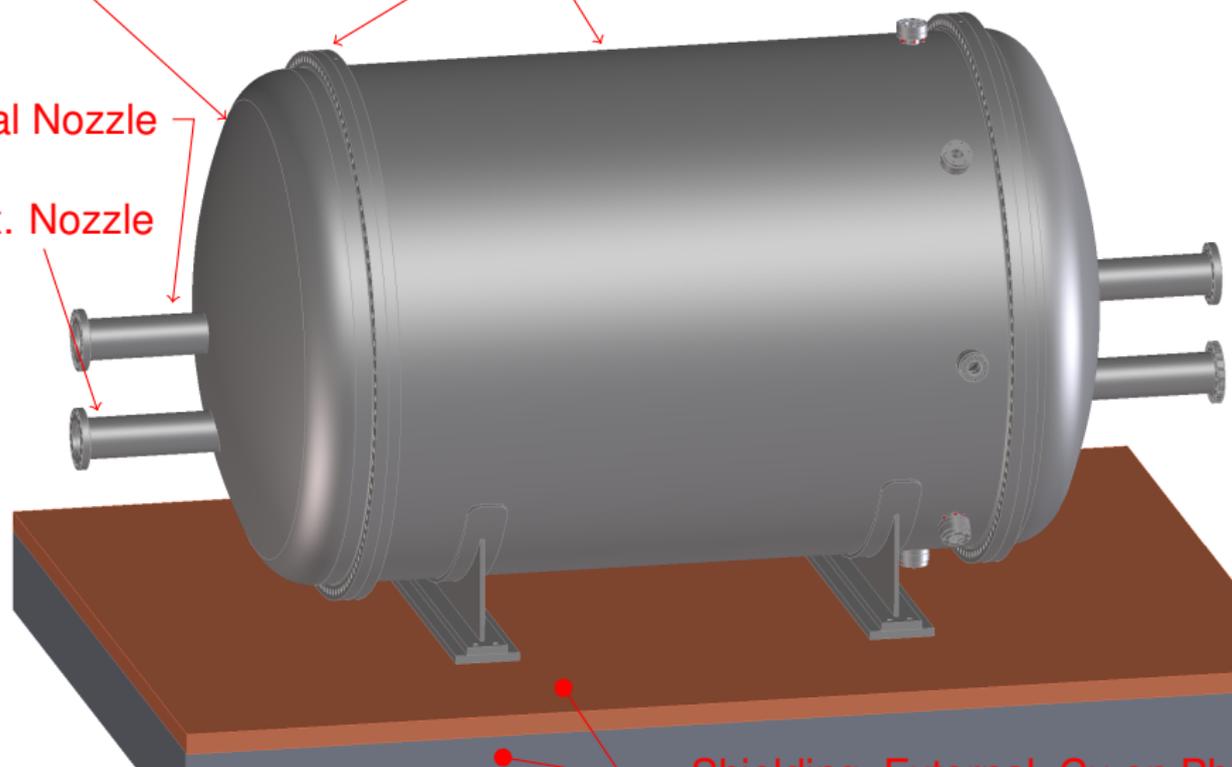

Shielding, External, Cu on Pb

Main Cylindrical Vessel


Torispheric Heads

Main Flanges

EL HV Port

Axial Nozzle

Aux. Nozzle

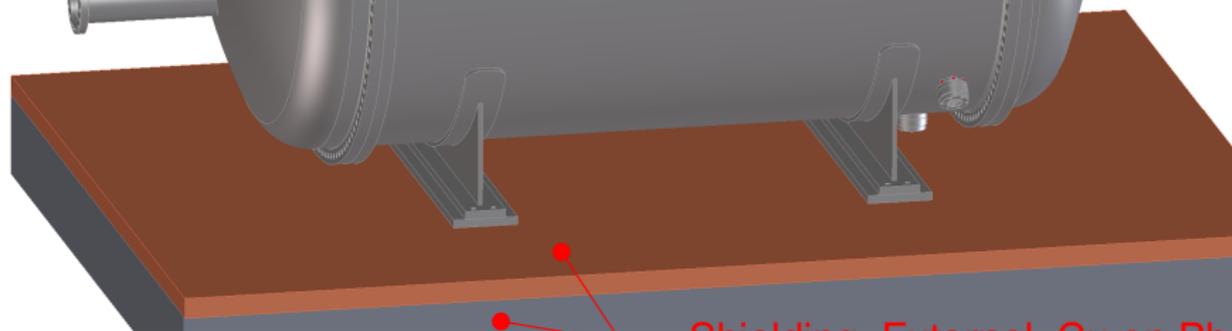

Shielding, External, Cu on Pb

Main Cylindrical Vessel

Torispheric Heads


Main Flanges

EL Inspection Ports

EL HV Port

Axial Nozzle

Aux. Nozzle

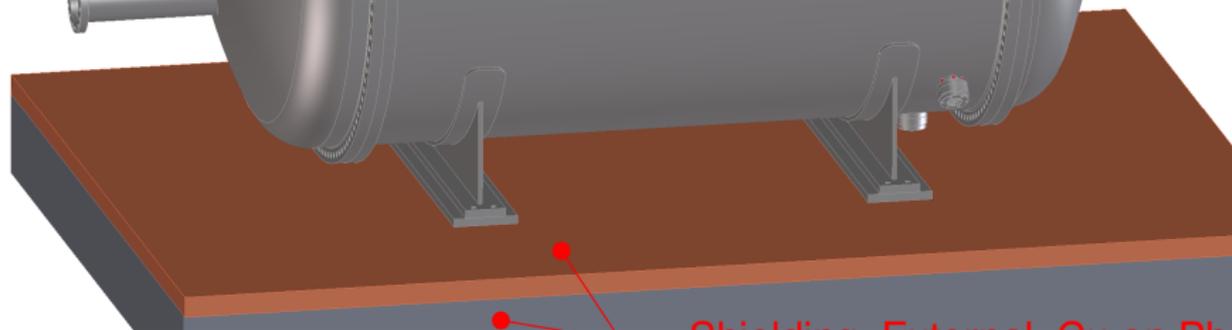

Shielding, External, Cu on Pb

Main Cylindrical Vessel

Torispheric Heads


Main Flanges


EL Inspection Ports

EL HV Port

Axial Nozzle


Aux. Nozzle

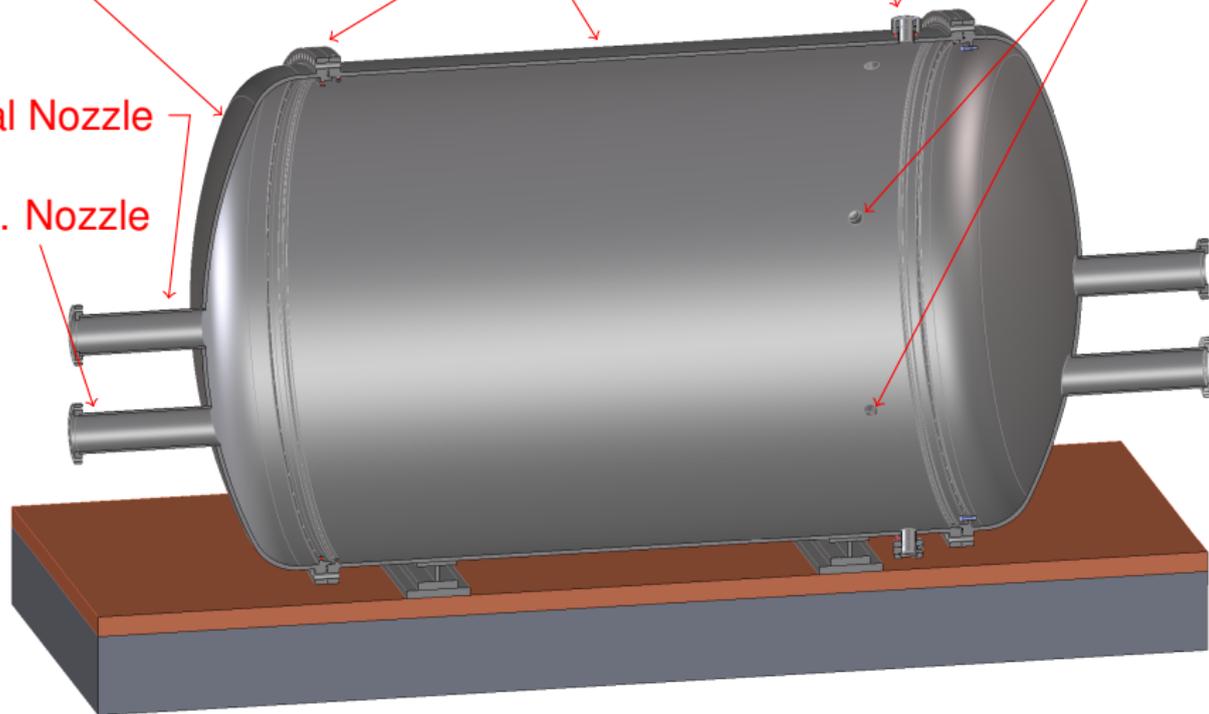

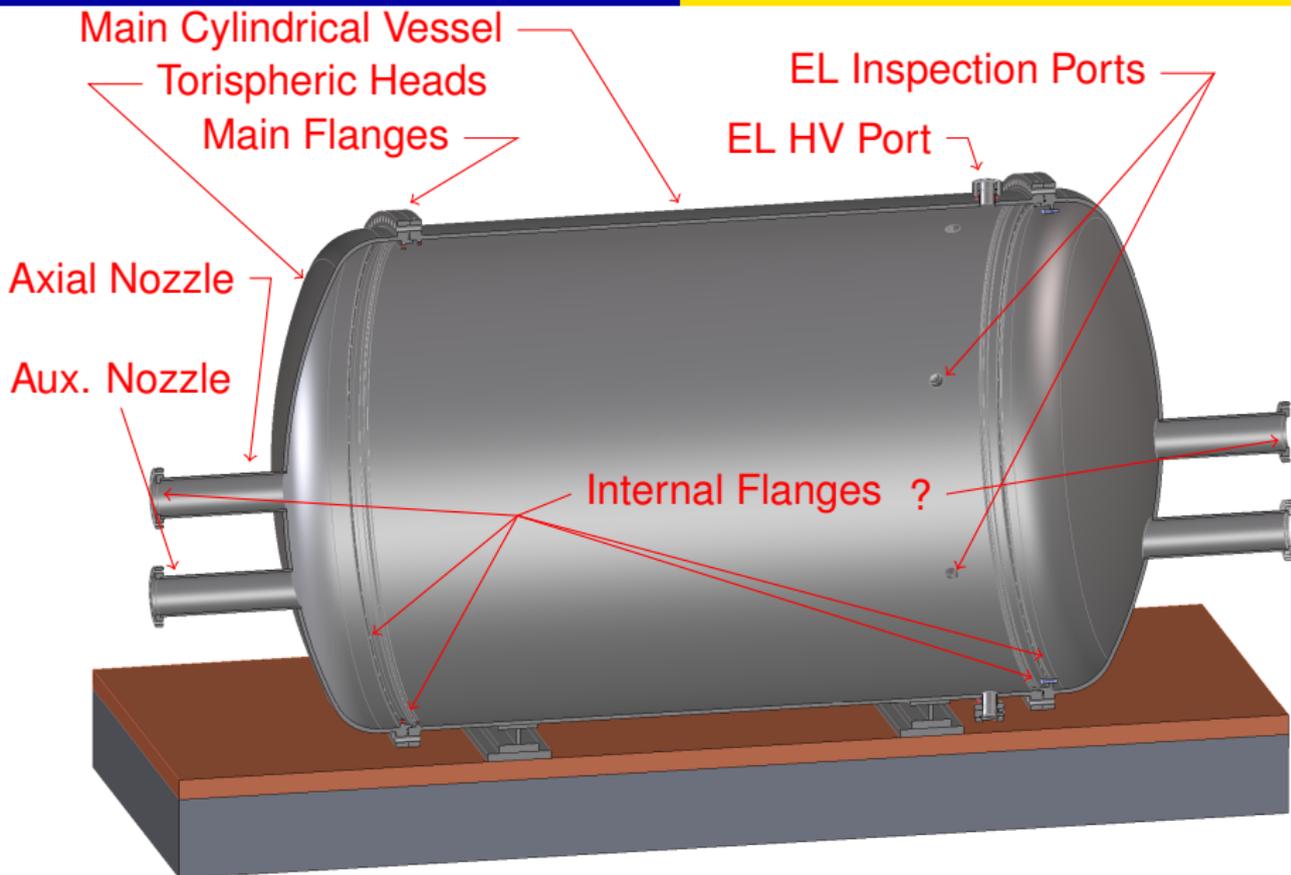


Main Cylindrical Vessel


Cu Shield Bars, 40x 70 kg. ea.

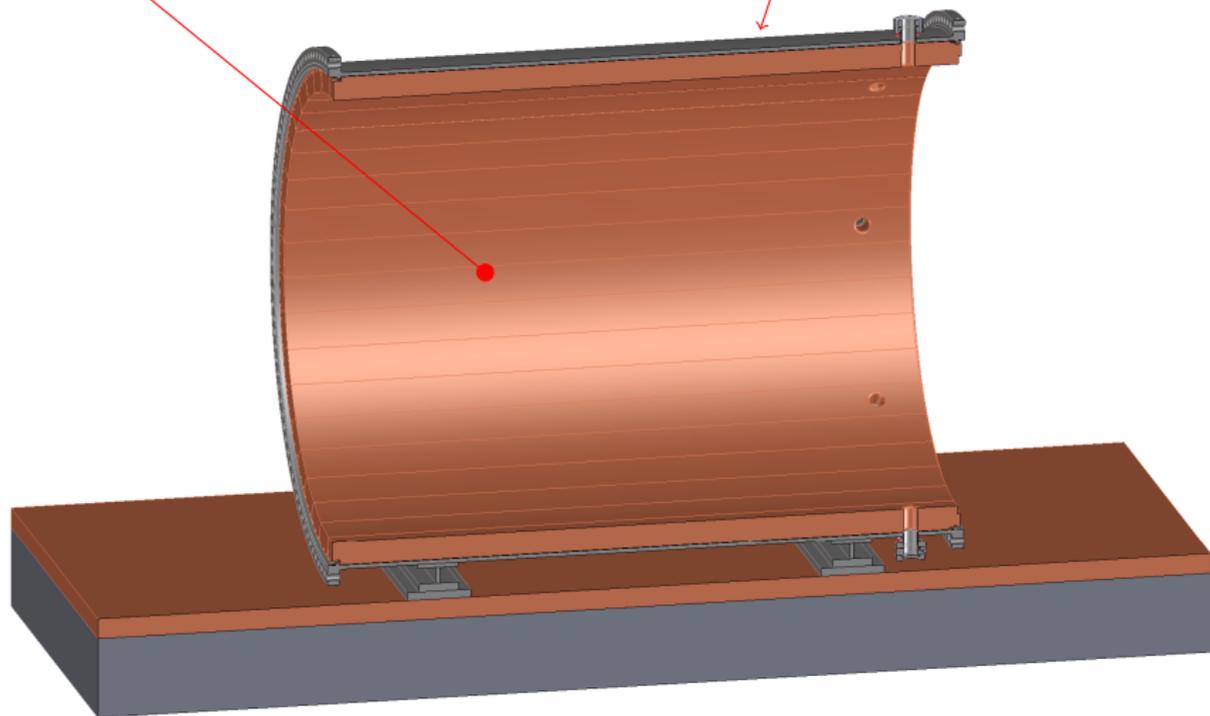

Main Cylindrical Vessel

Cu Shield Bars, 40x 70 kg. ea.

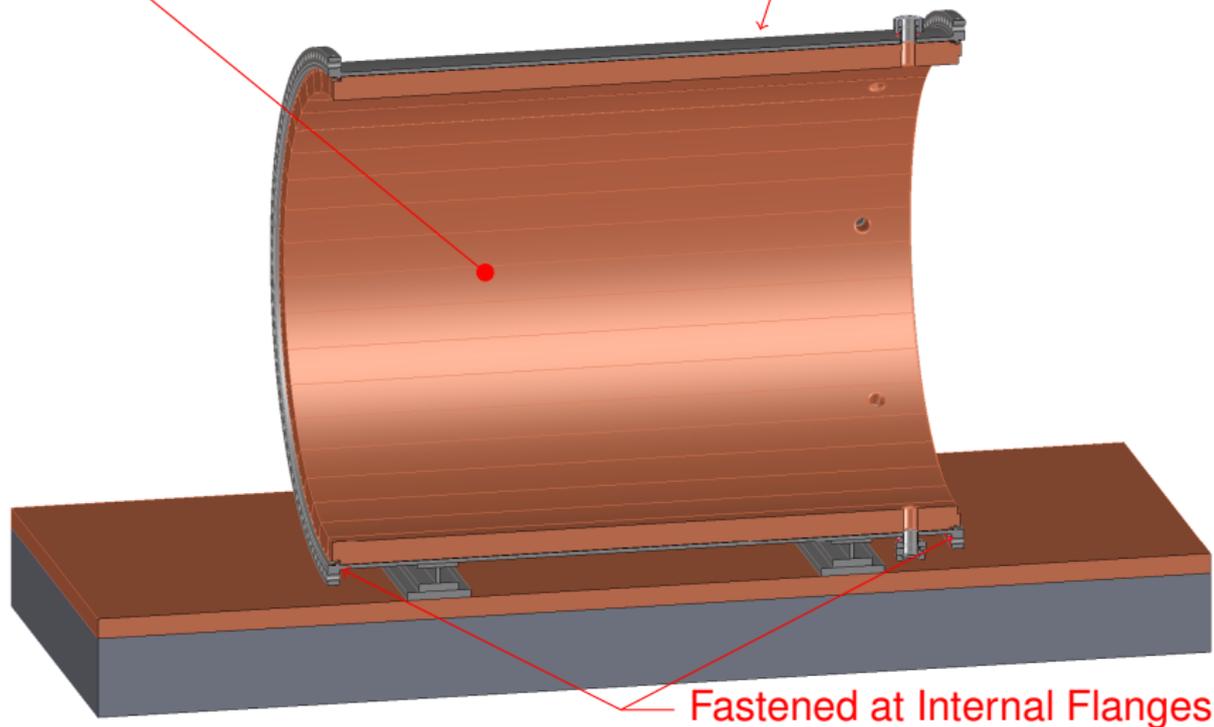

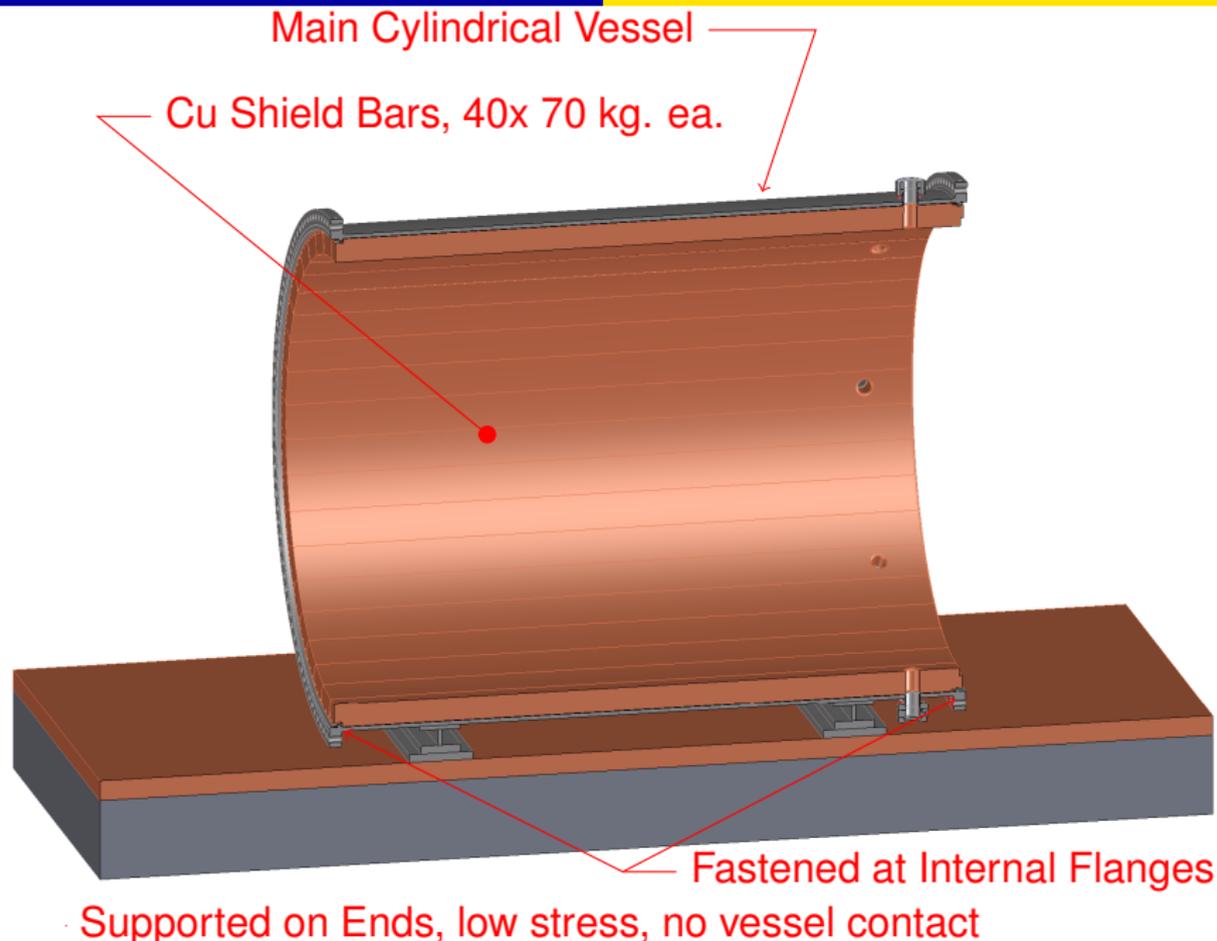

Copper bars fastened to main cylindrical vessel internal flange

