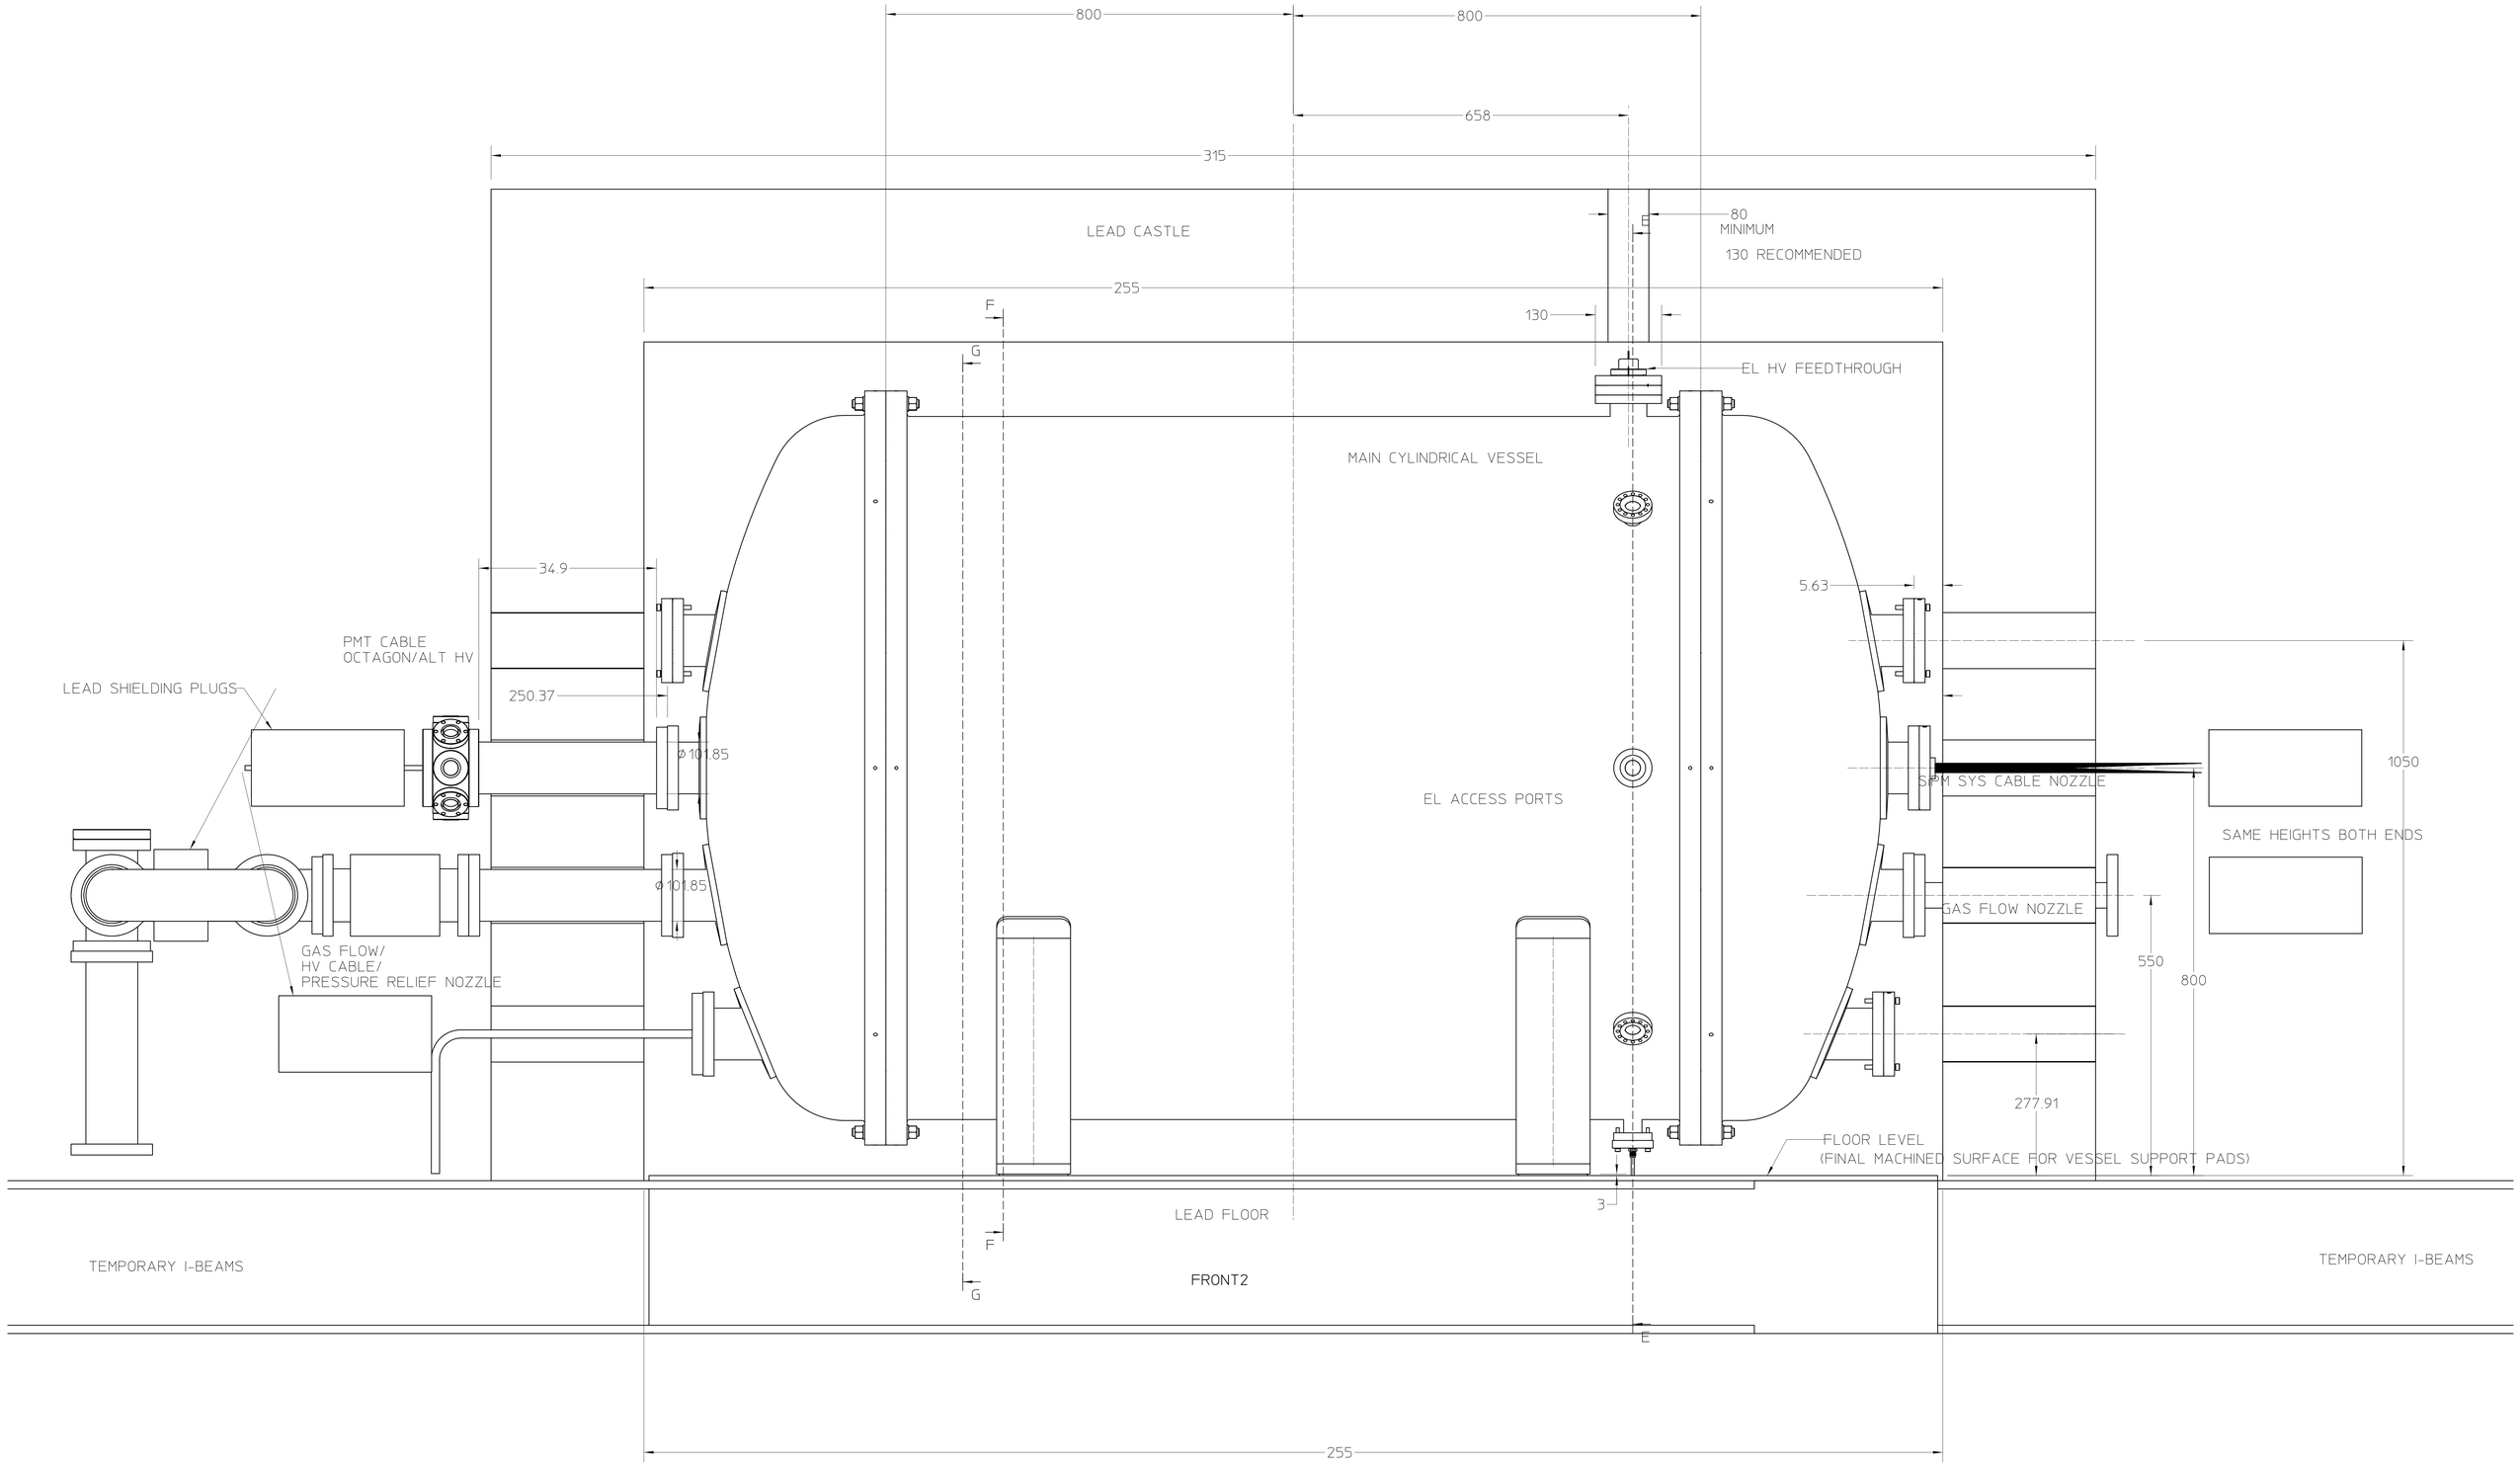
800
800
658
315
LEAD CASTLE
80
MINIMUM
130 RECOMMENDED
E
255
F
130
G
EL HV FEEDTHROUGH
MAIN CYLINDRICAL VESSEL
34.9
5.63
PMT CABLE
OCTAGON/ALT HV
LEAD SHIELDING PLUGS
250.37
ø101.85
ø101.85
EL ACCESS PORTS
SPM SYS CABLE NOZZLE
1050
SAME HEIGHTS BOTH ENDS
GAS FLOW NOZZLE
550
800
GAS FLOW/
HV CABLE/
PRESSURE RELIEF NOZZLE
277.91
FLOOR LEVEL
(FINAL MACHINED SURFACE FOR VESSEL SUPPORT PADS)
3
LEAD FLOOR
F
TEMPORARY I-BEAMS
FRONT2
G
TEMPORARY I-BEAMS
E
255