


socket/header type connectors give lowest stack spacing (0.554mm) as each successive cable need not go up and over the previous connector

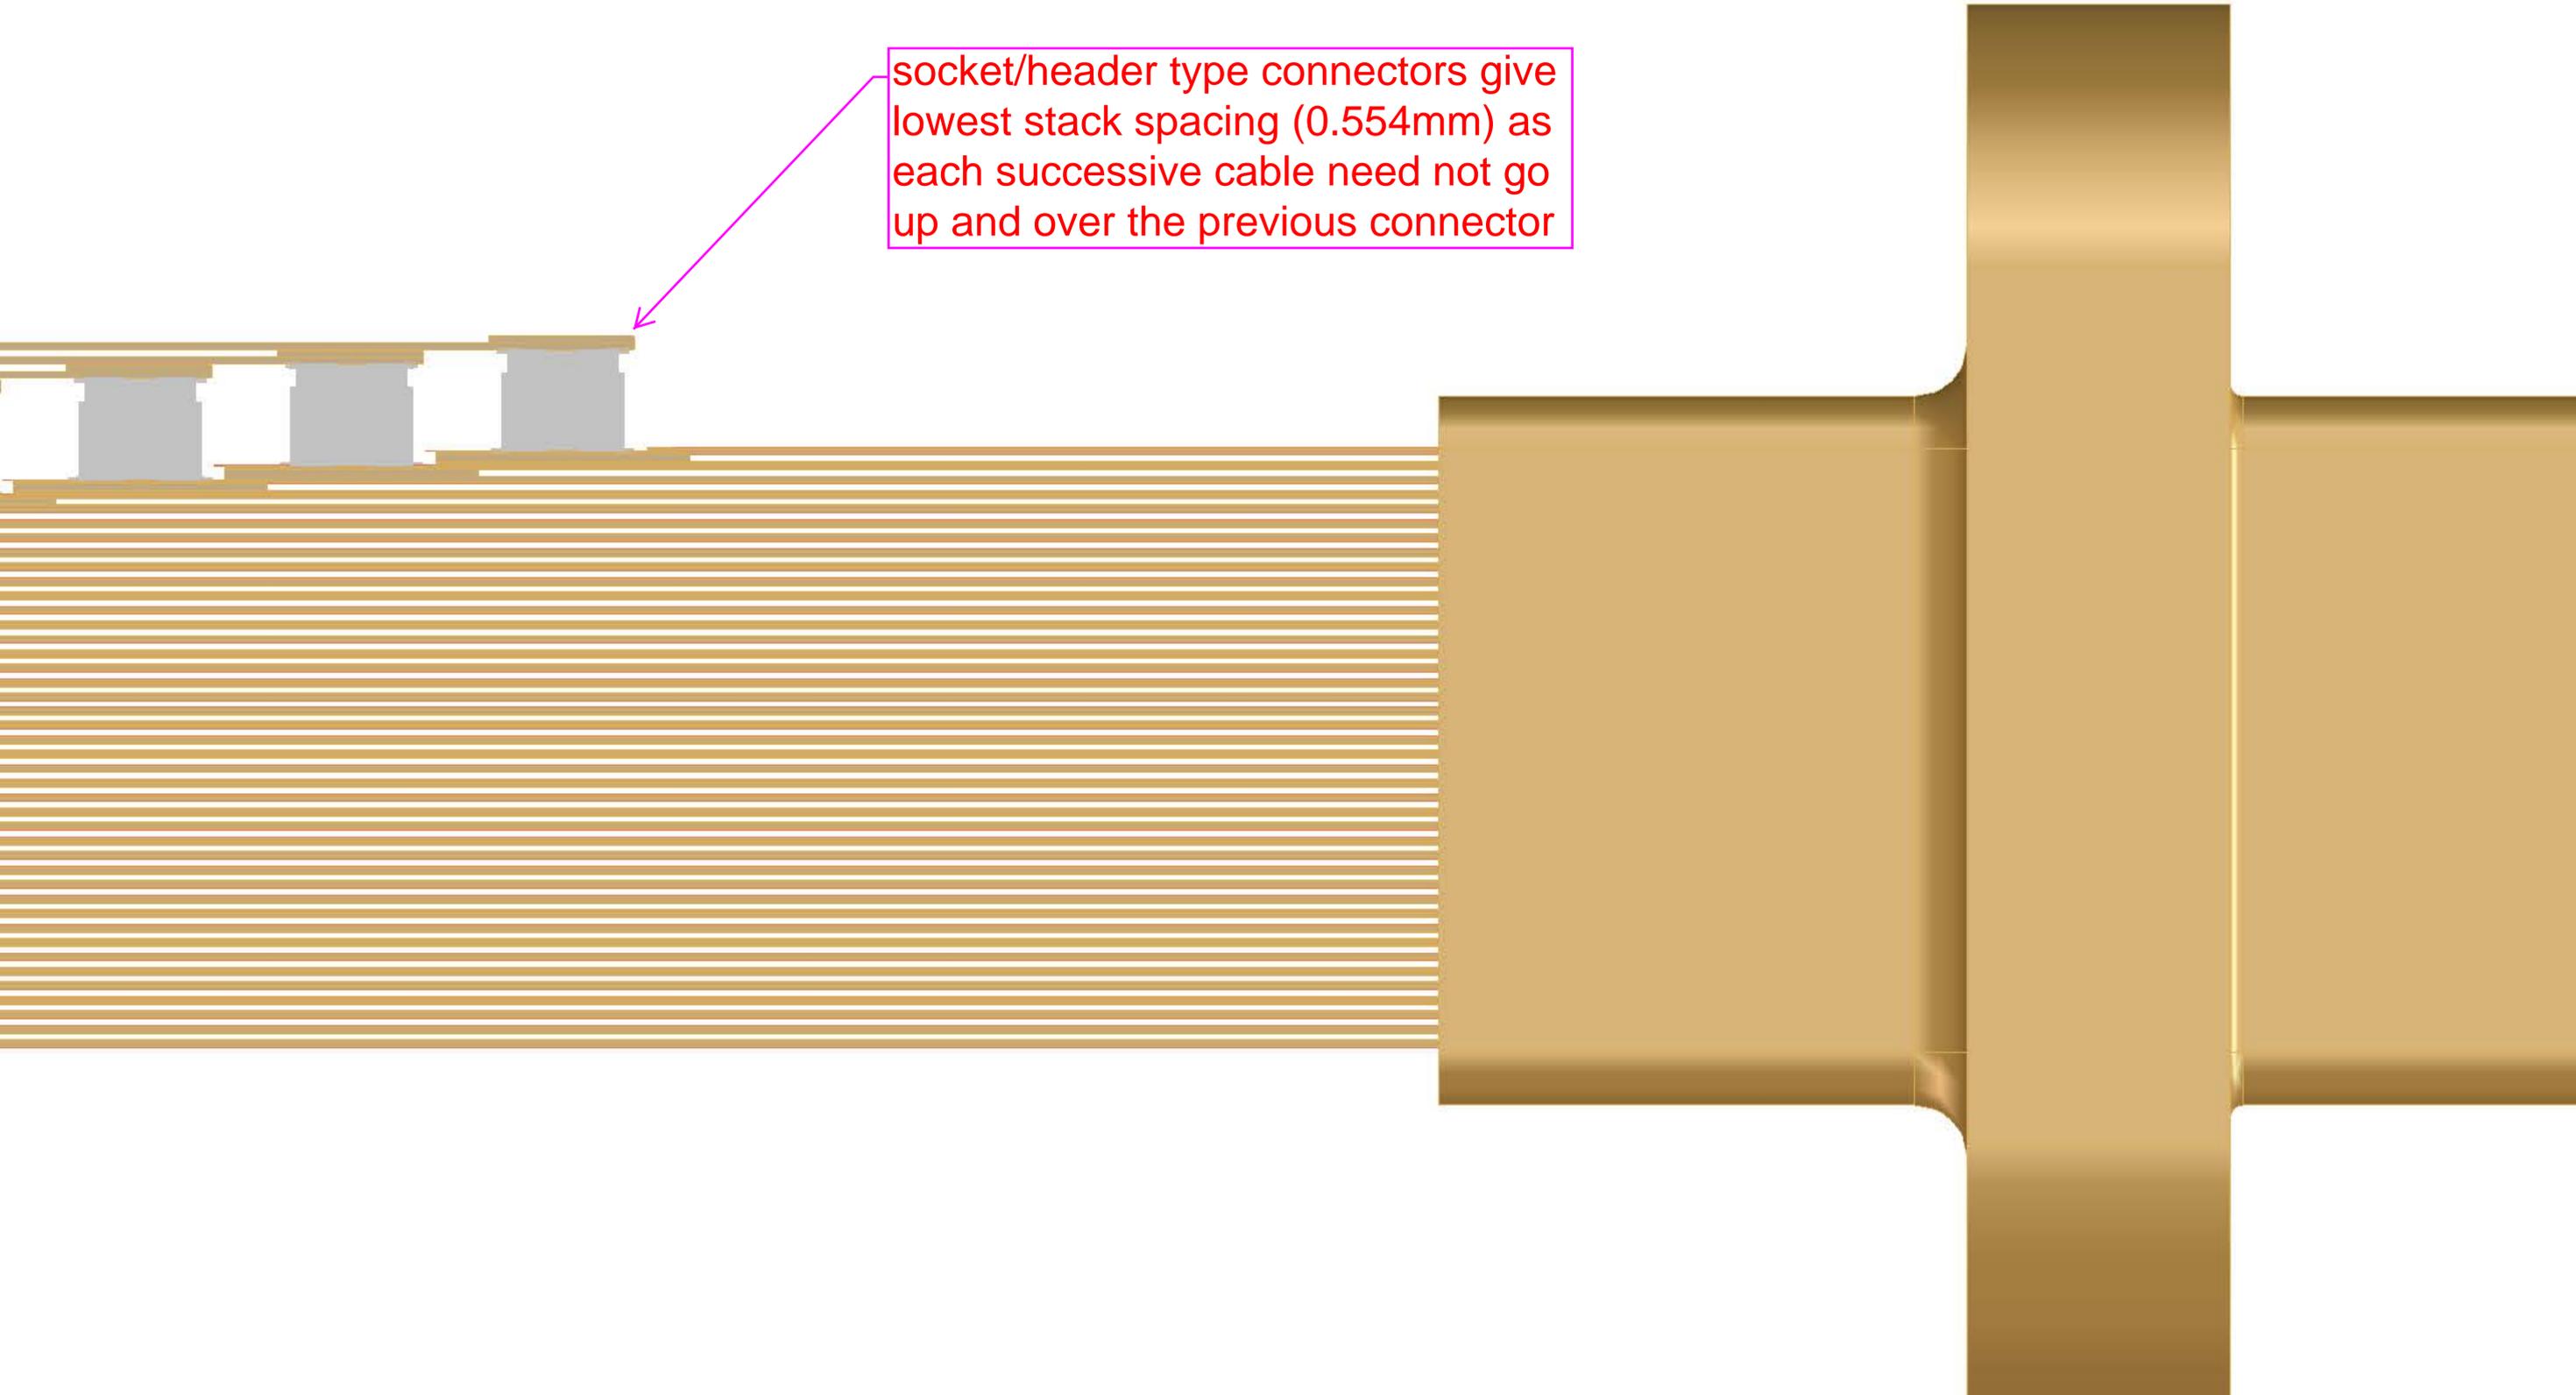

disassembly sequence

5 ( entire head may be removed, cables and feedthrough remain in place and do not move

inner plug seal


4


2

1

3

seals for retainer bolts

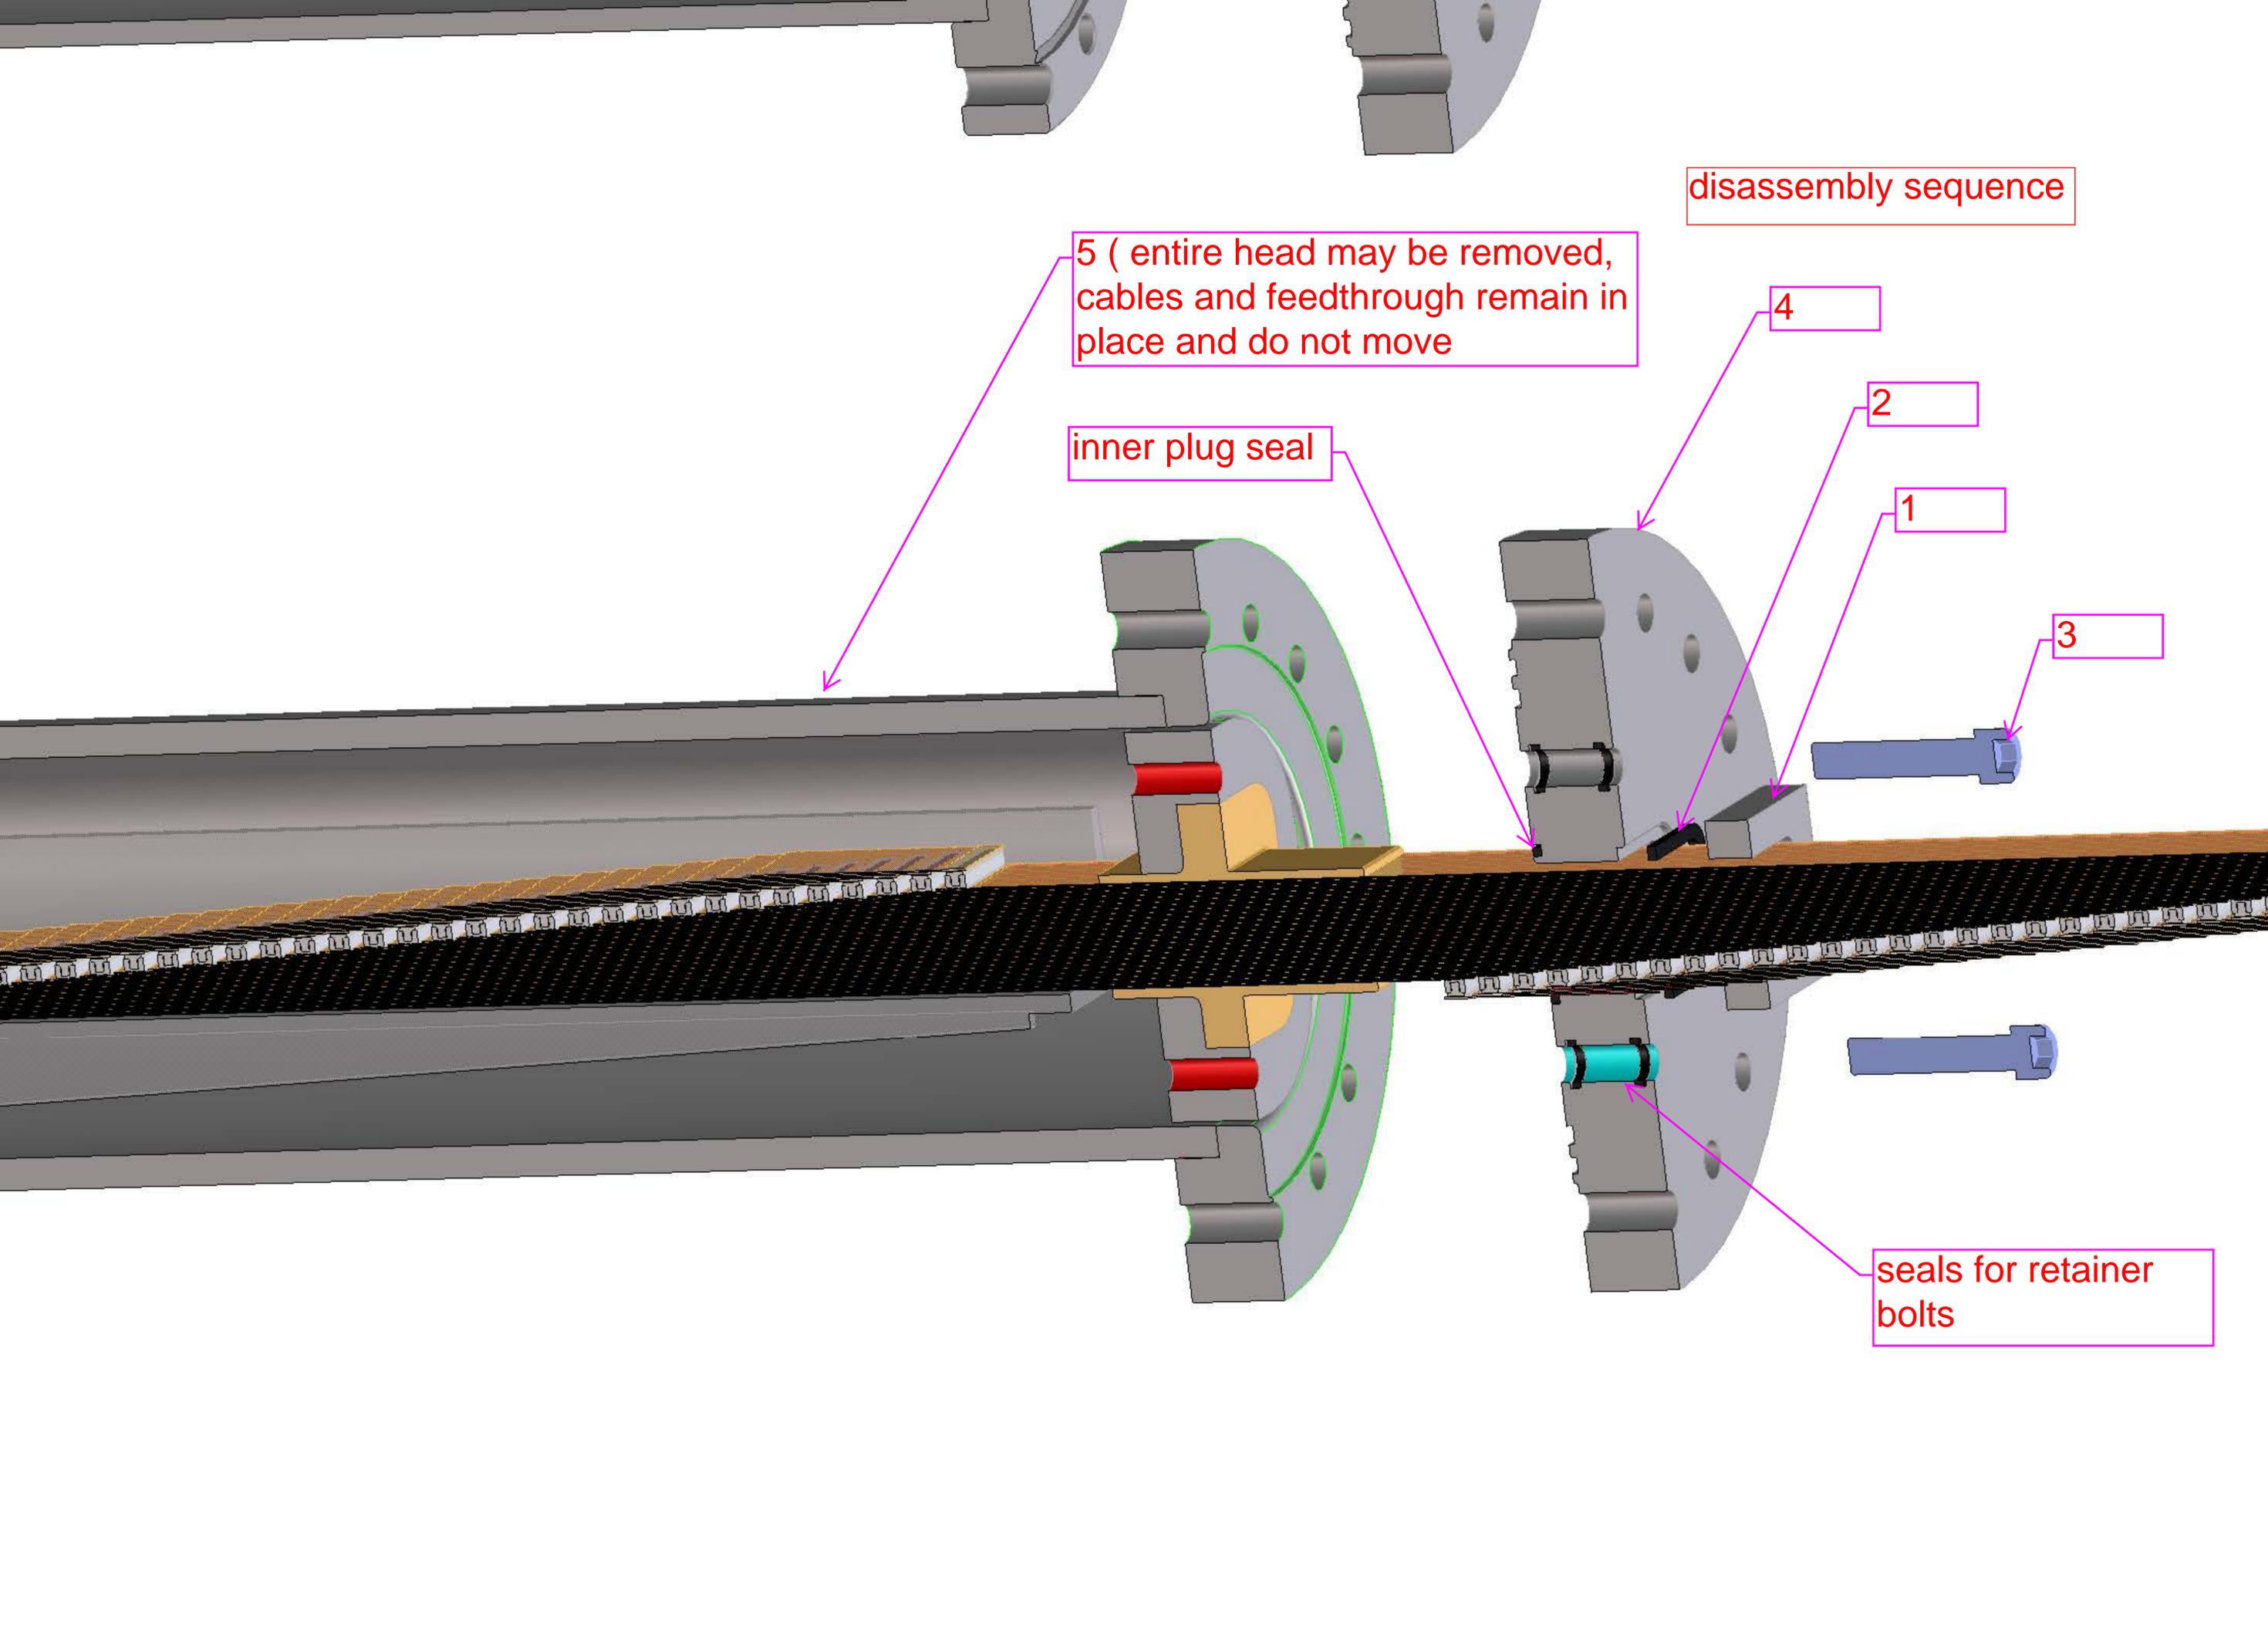

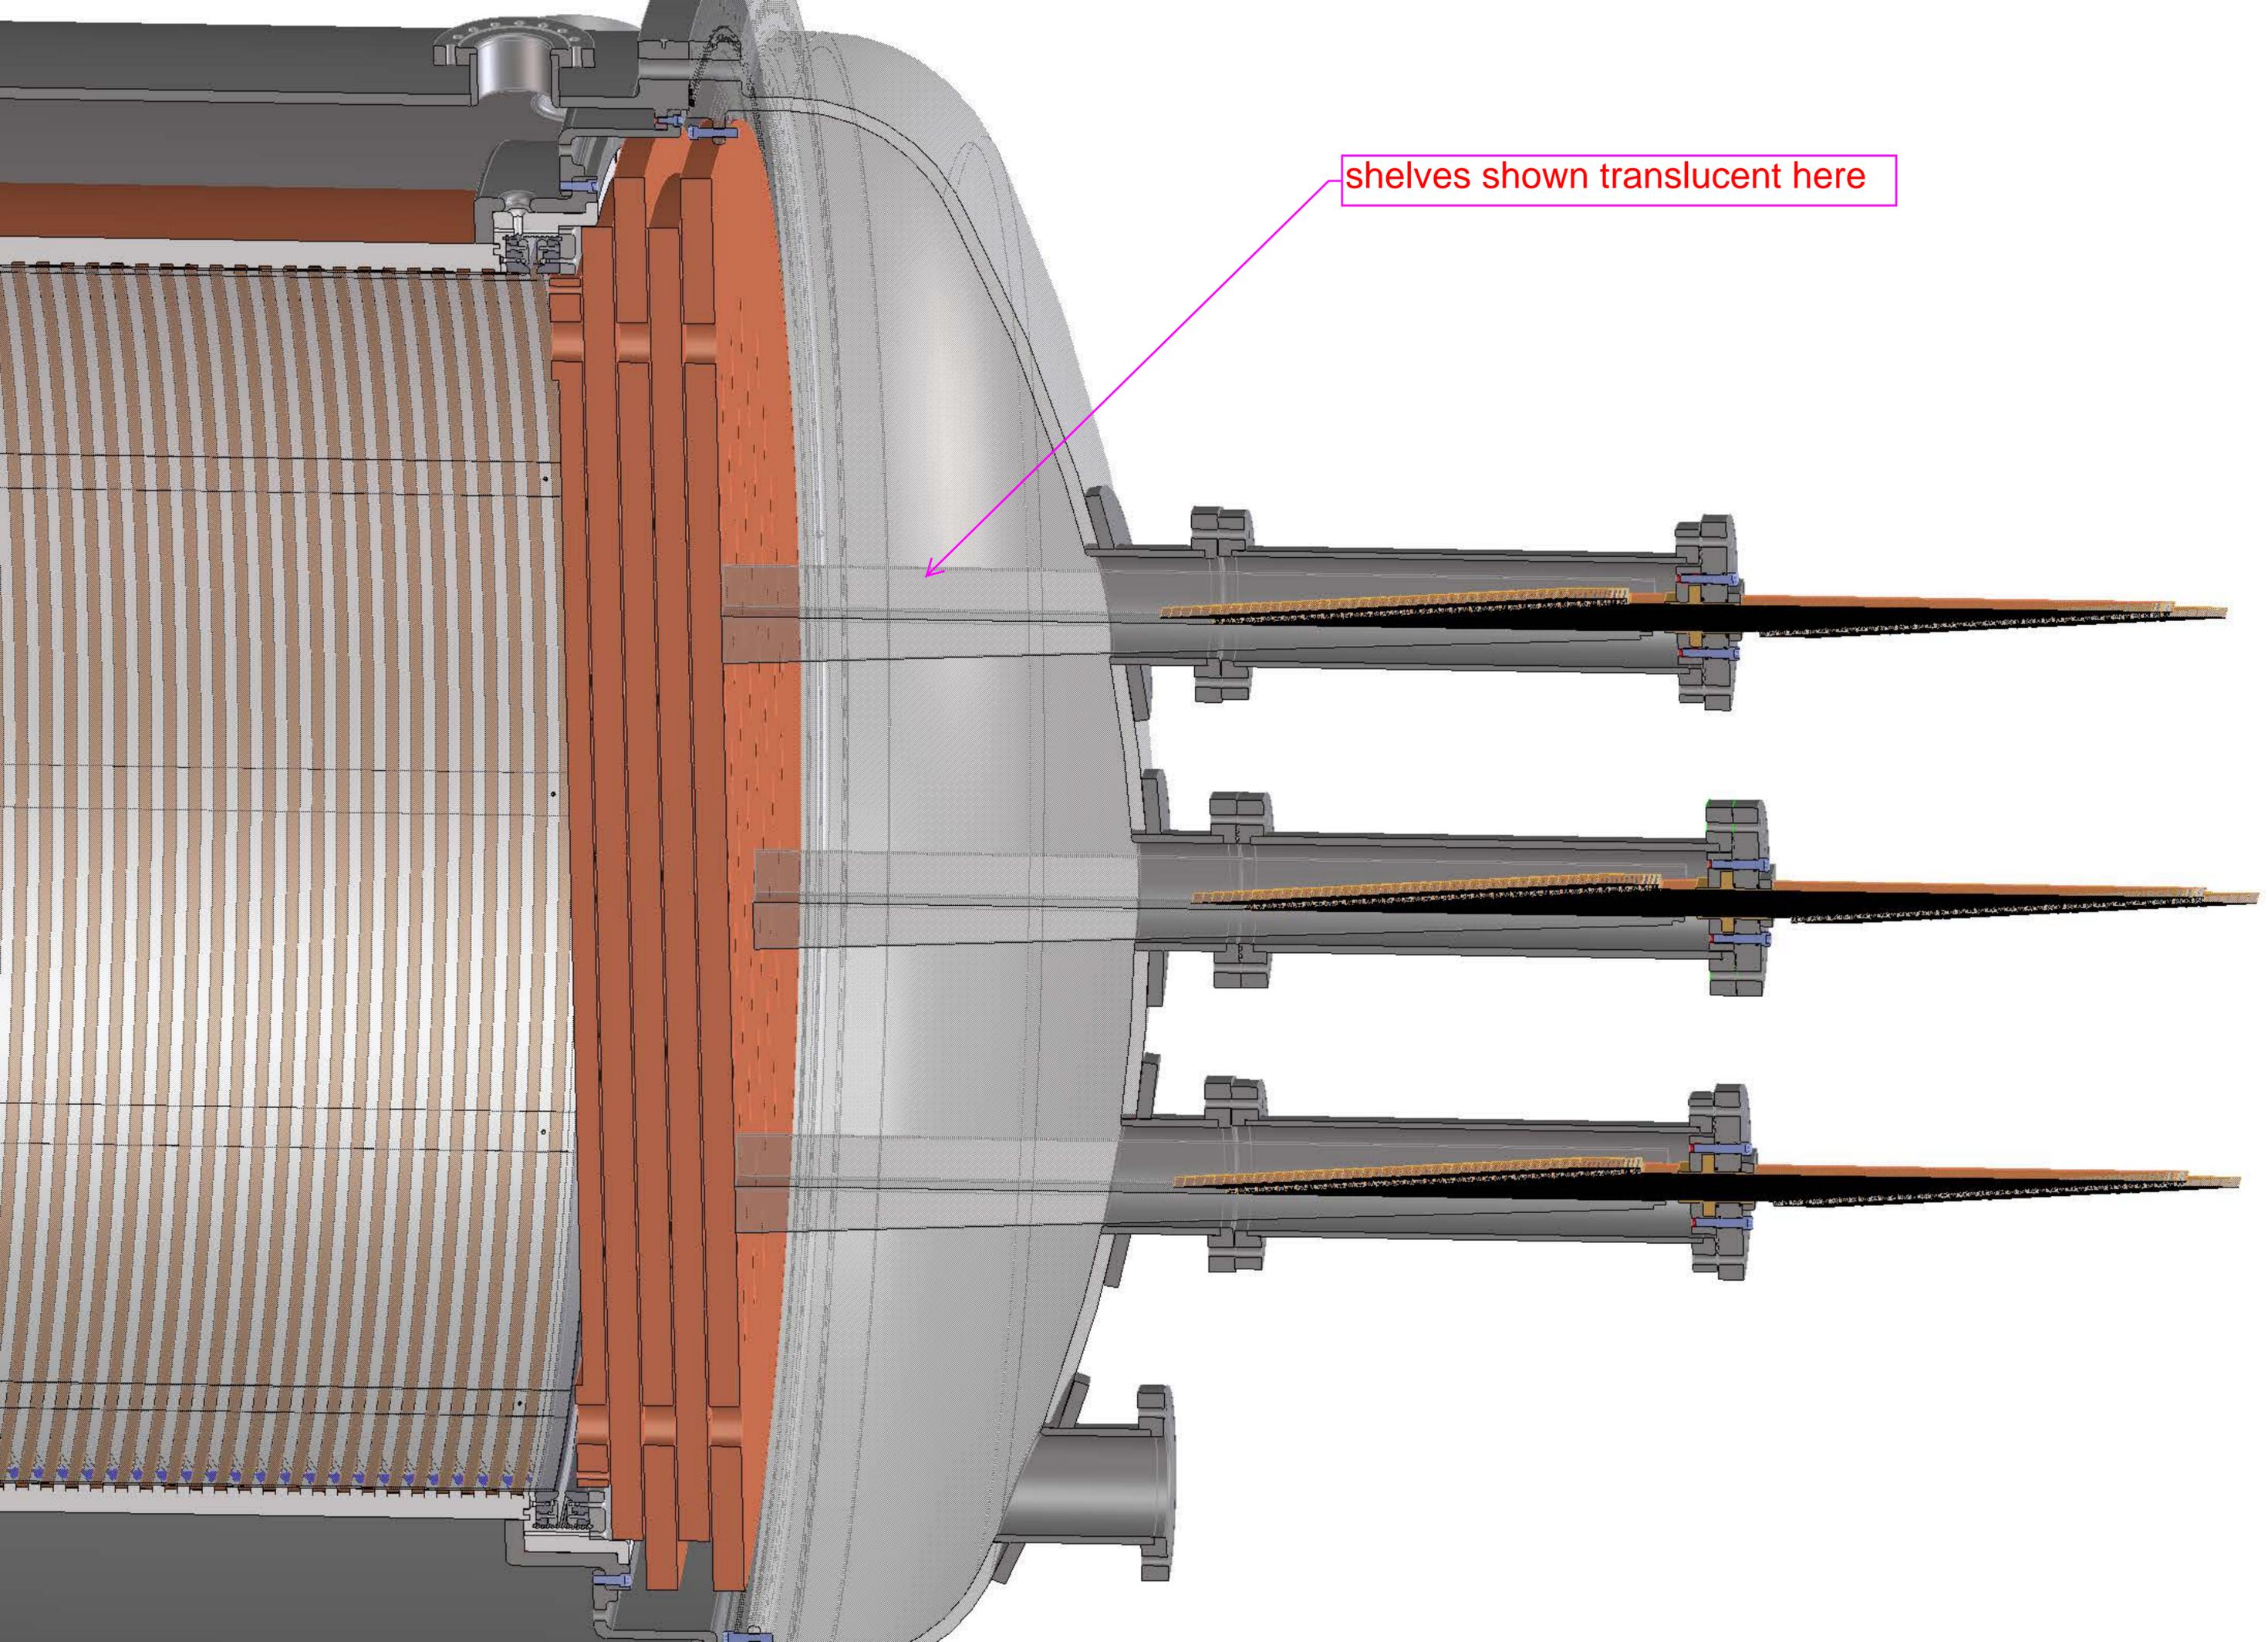

shelves shown translucent here

