

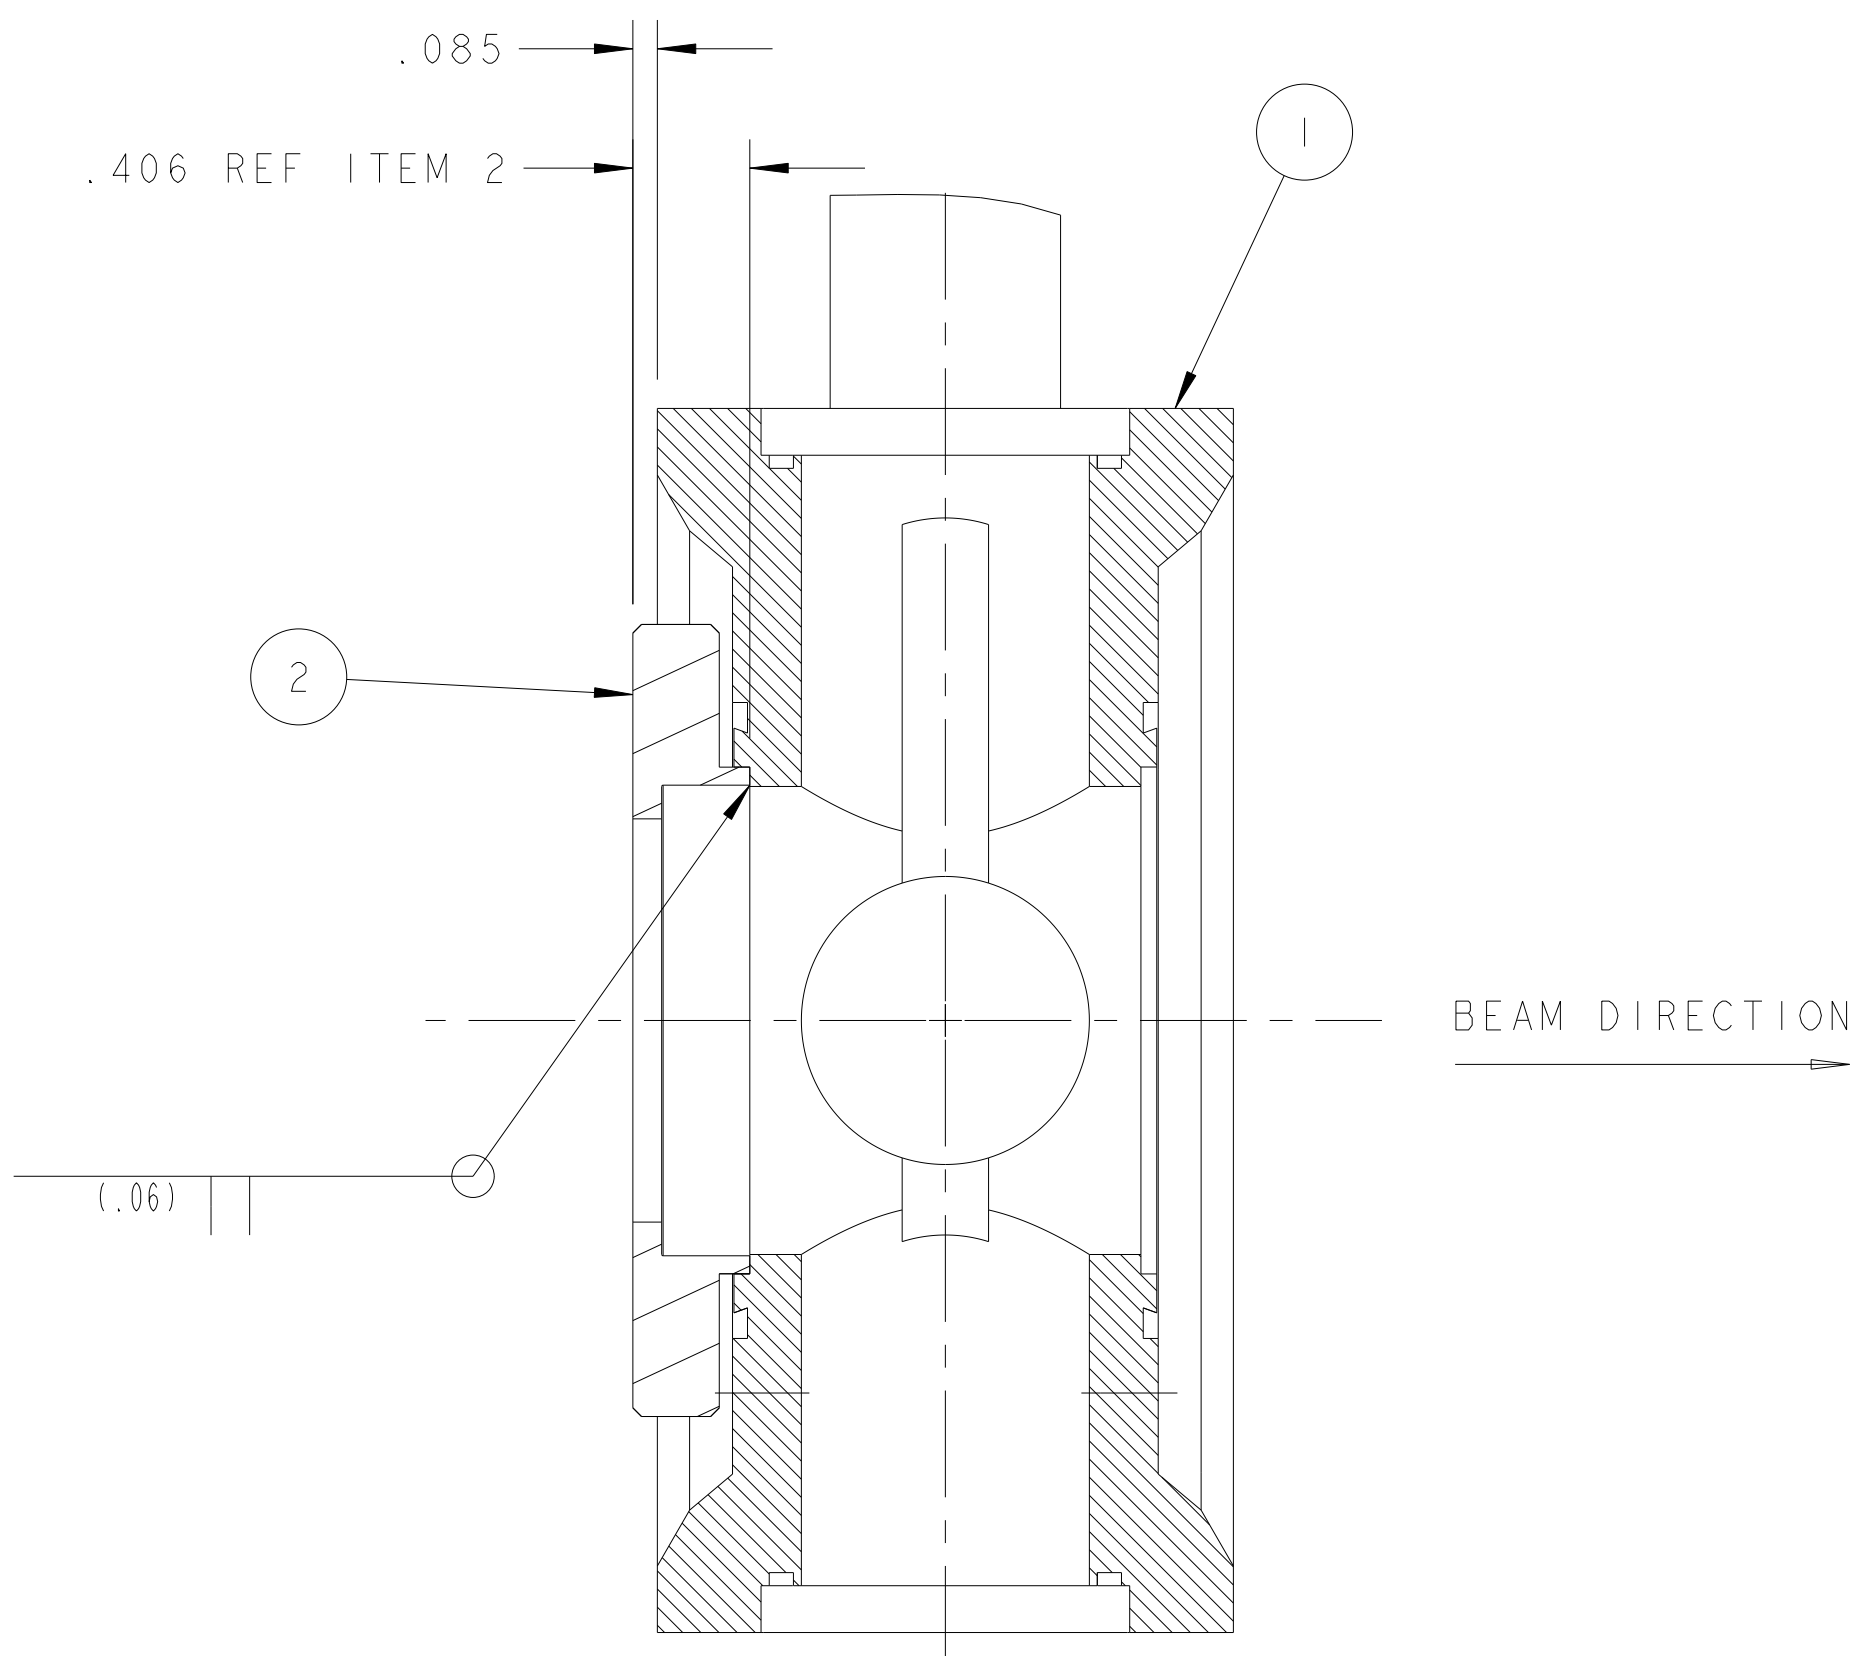
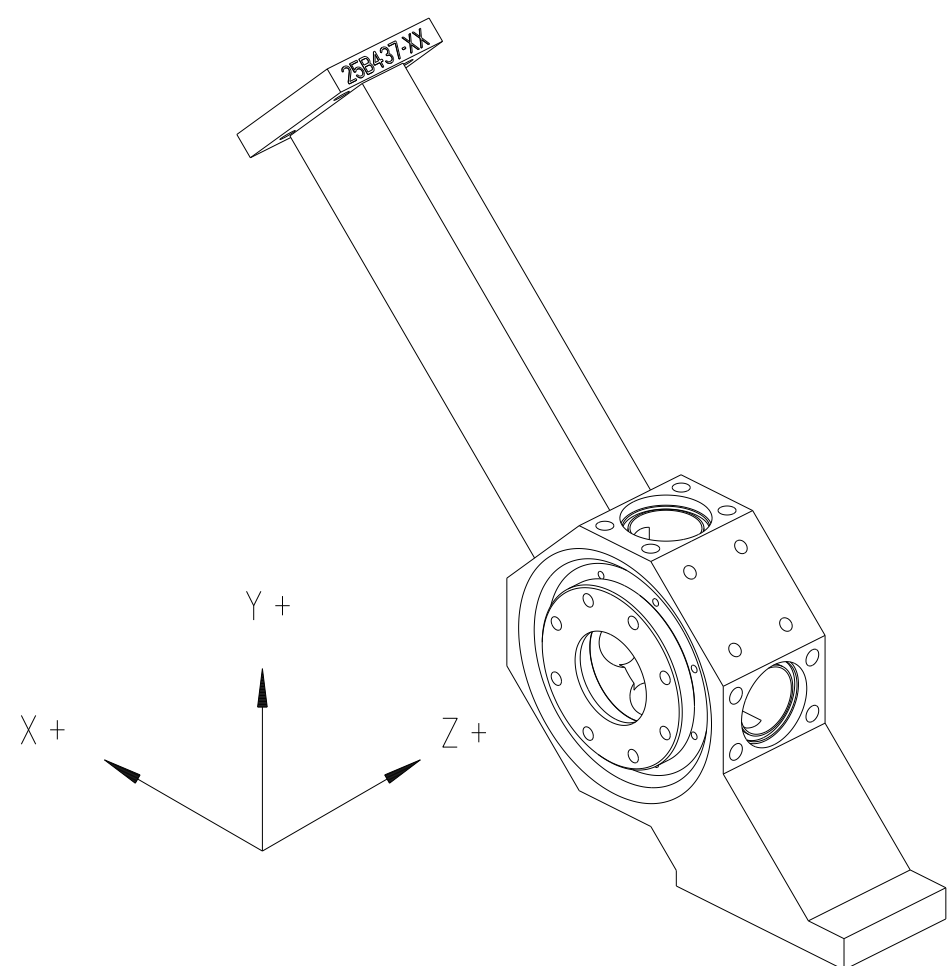


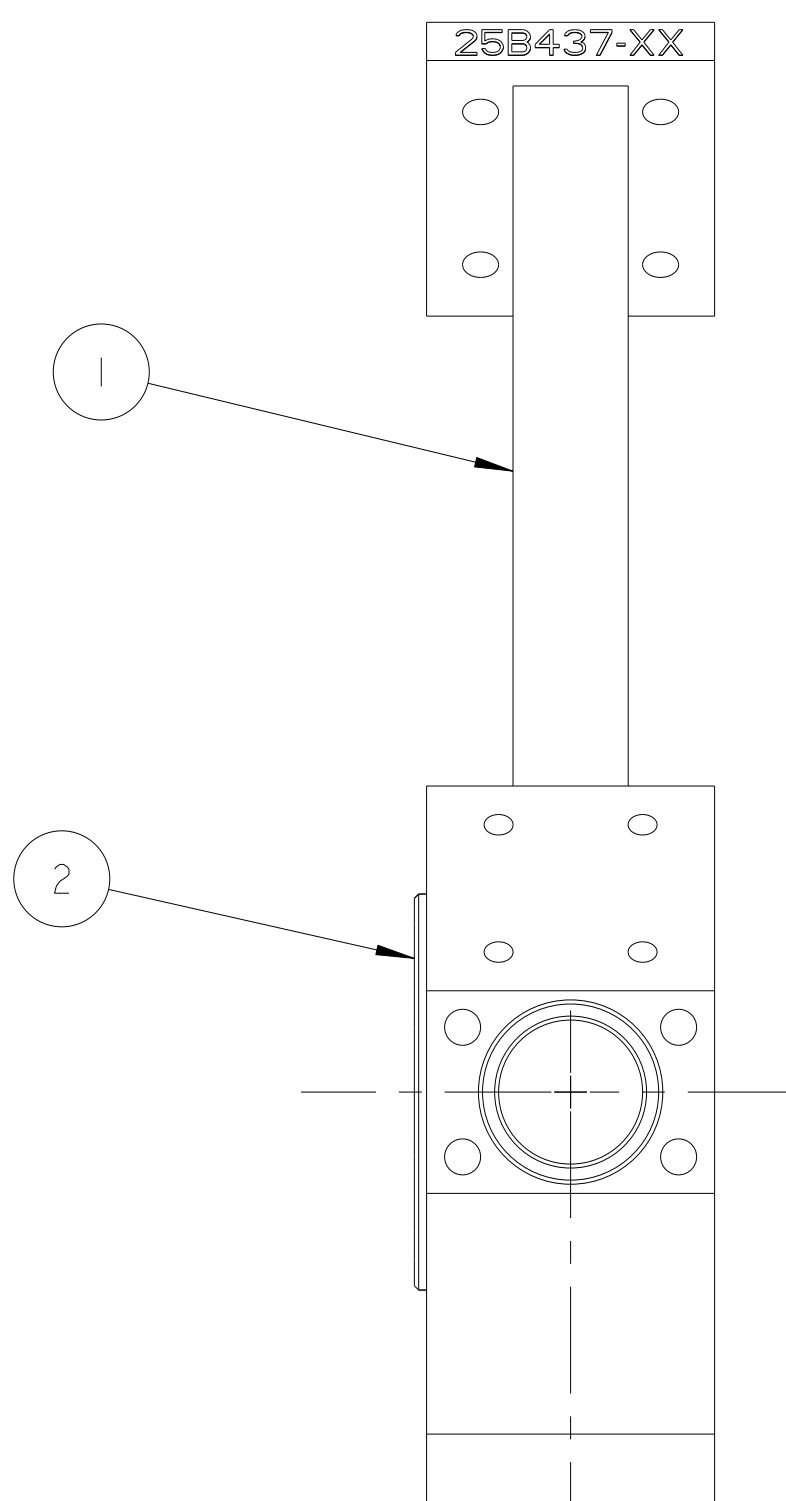

SECTION **B-B**
SCALE 3/2

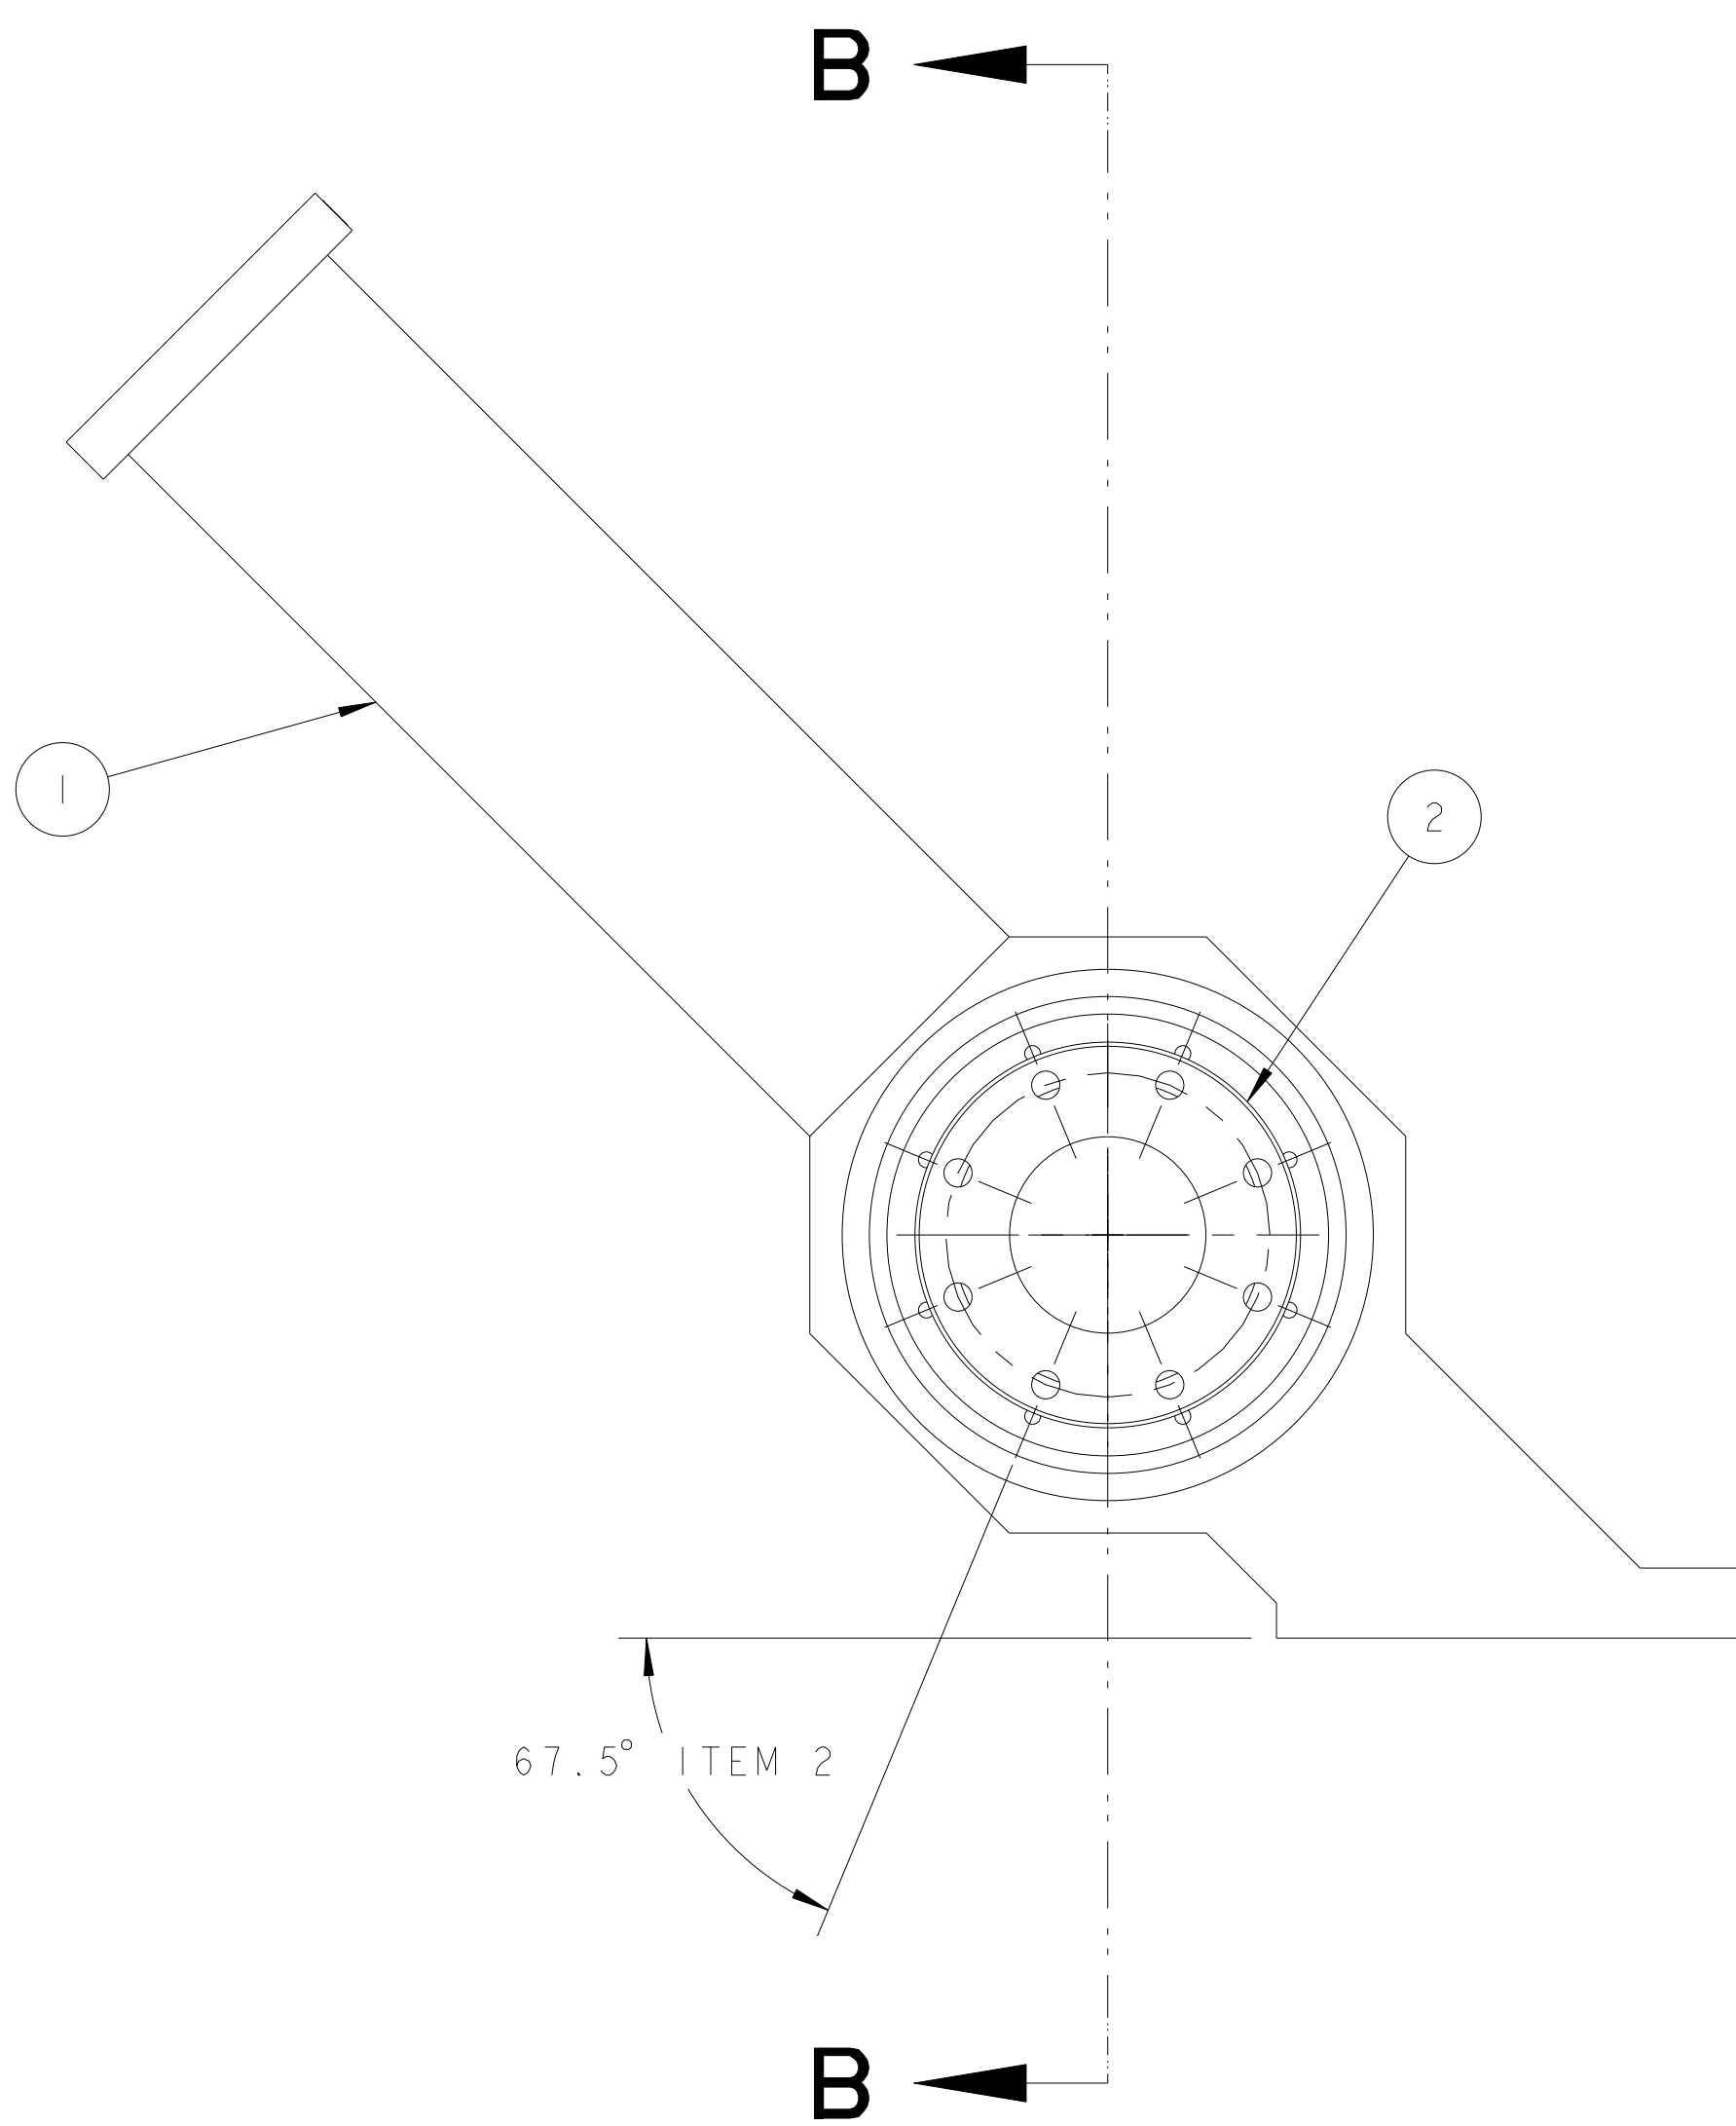

- NOTES:

1. FINISHED PART TO BE VACUUM TIGHT.
LEAK RATE NOT TO EXCEED 1×10^{-8} TORR - LITERS PER SECOND HELIUM.
2. ULTRA-HIGH VACUUM CLEANING AND PACKING REQUIRED.
3. ASSEMBLE IN CLEAN ENVIRONMENT.
AFTER ASSEMBLY AND WELDING, WRAP TO MAINTAIN CLEANLINESS.

[illegible]