
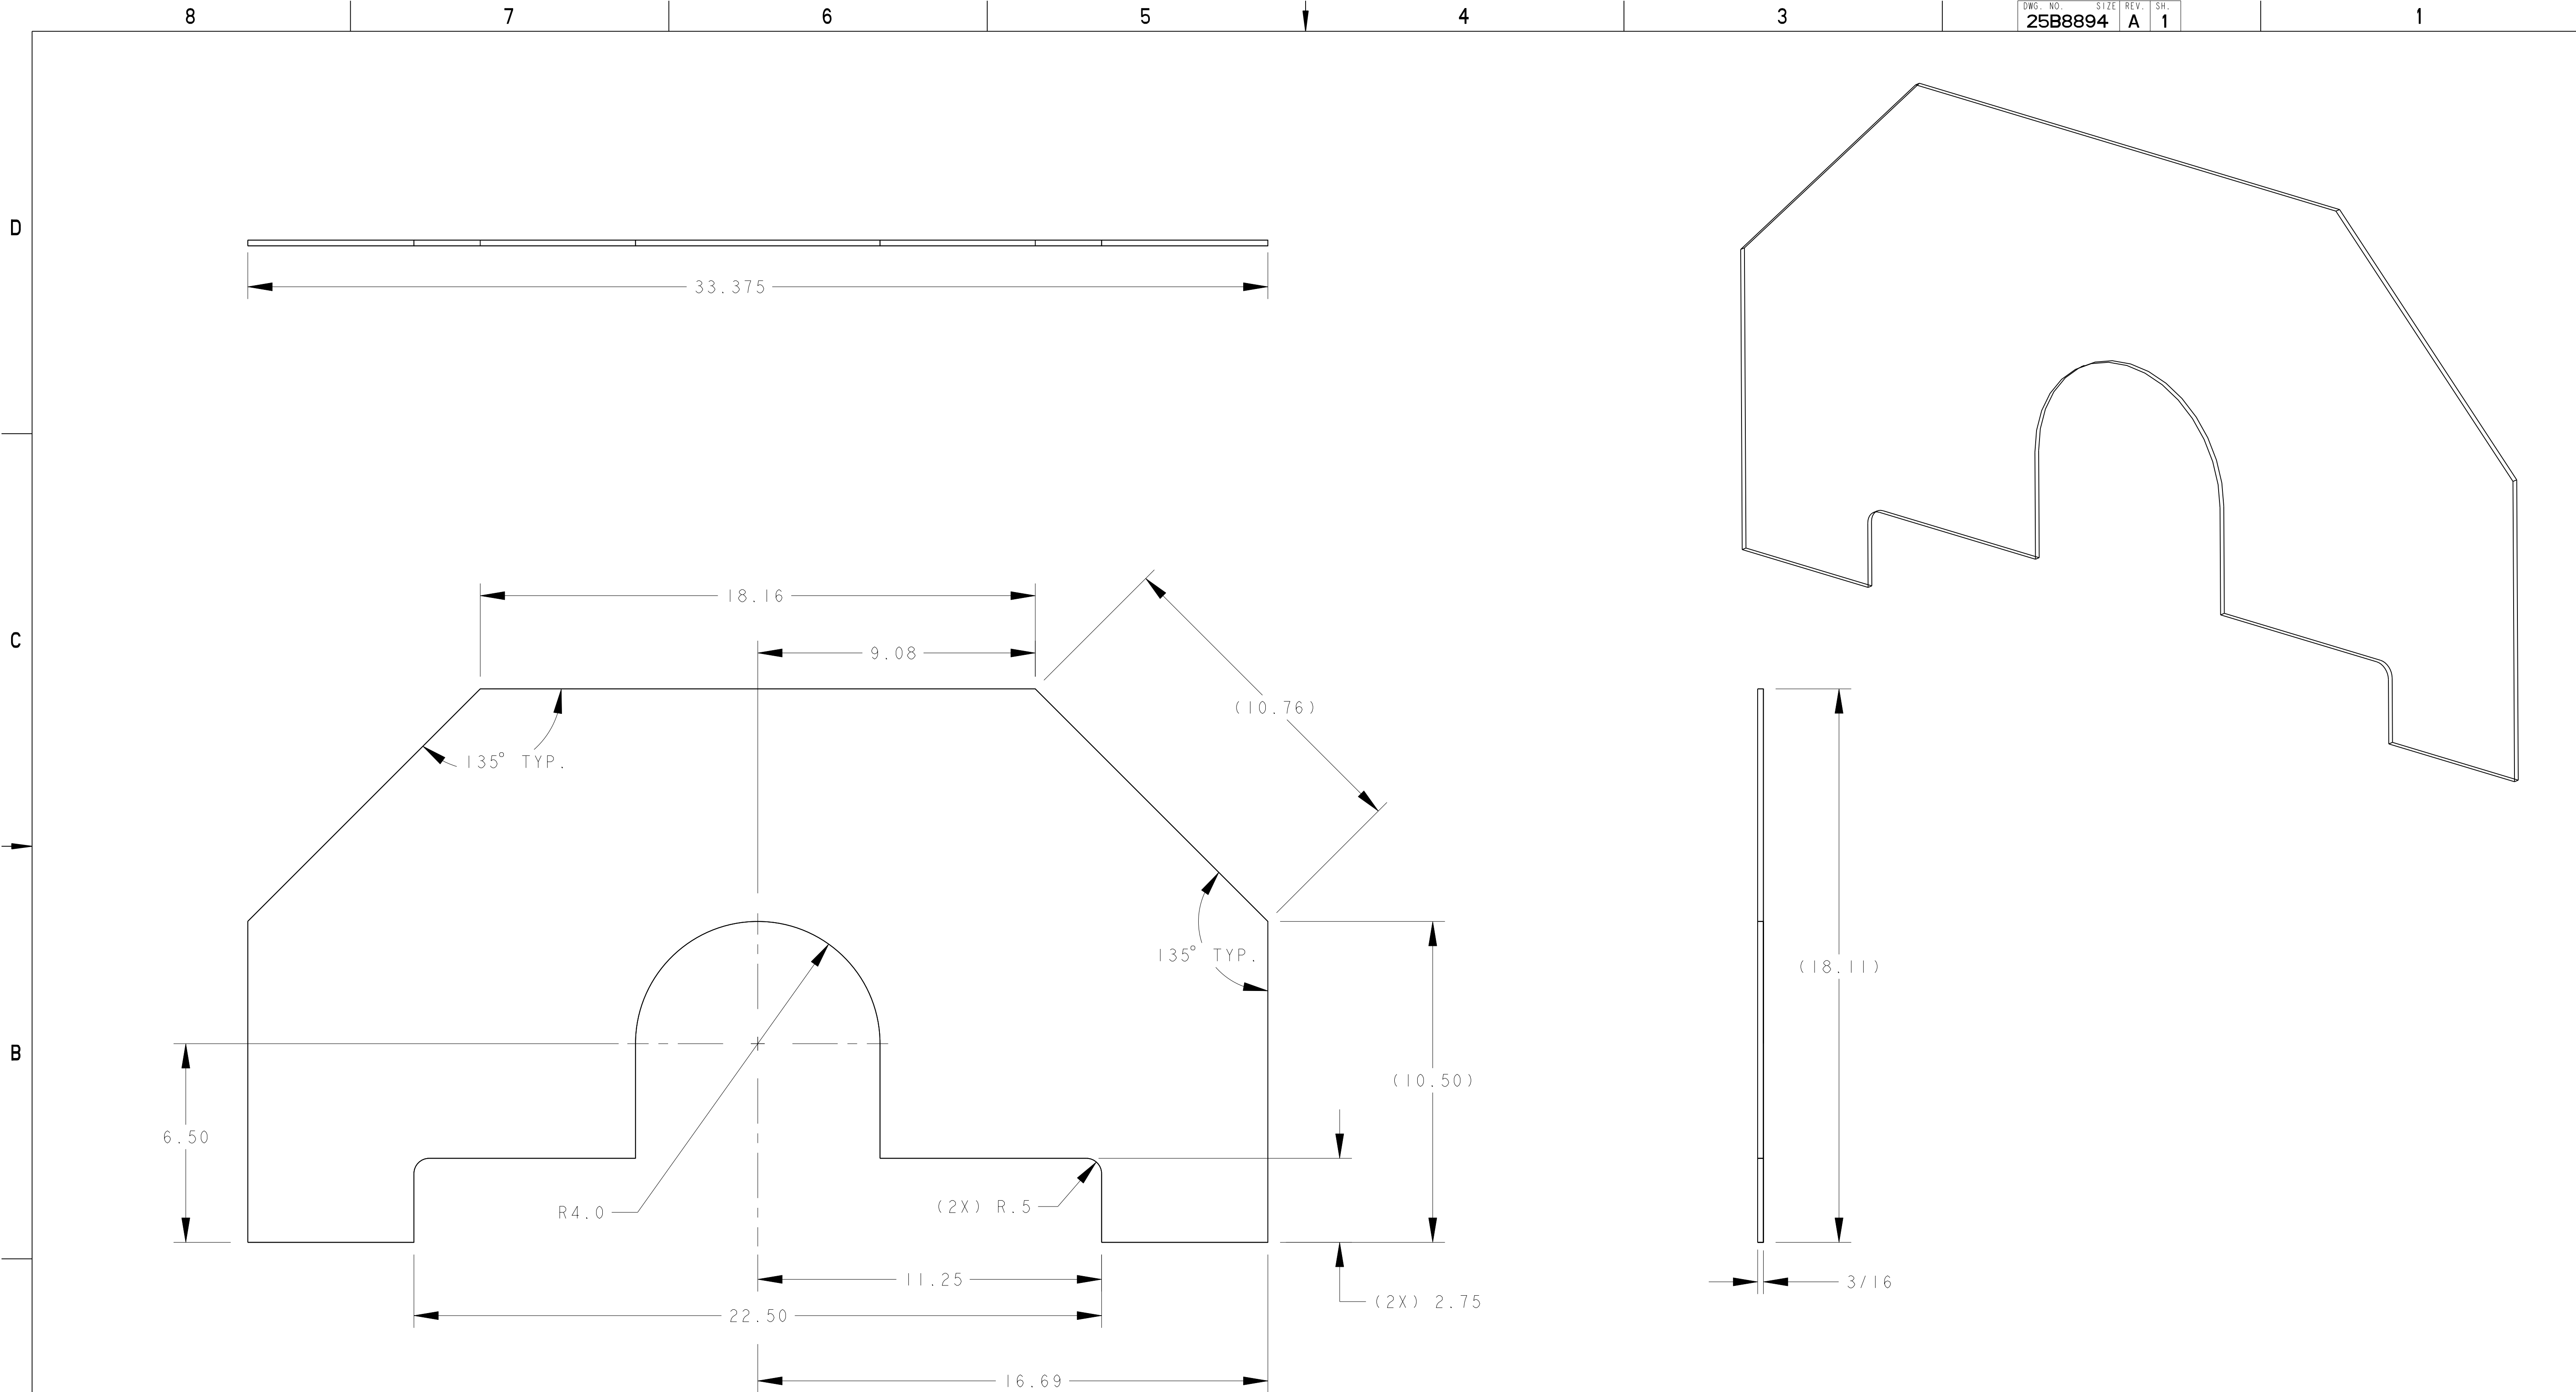
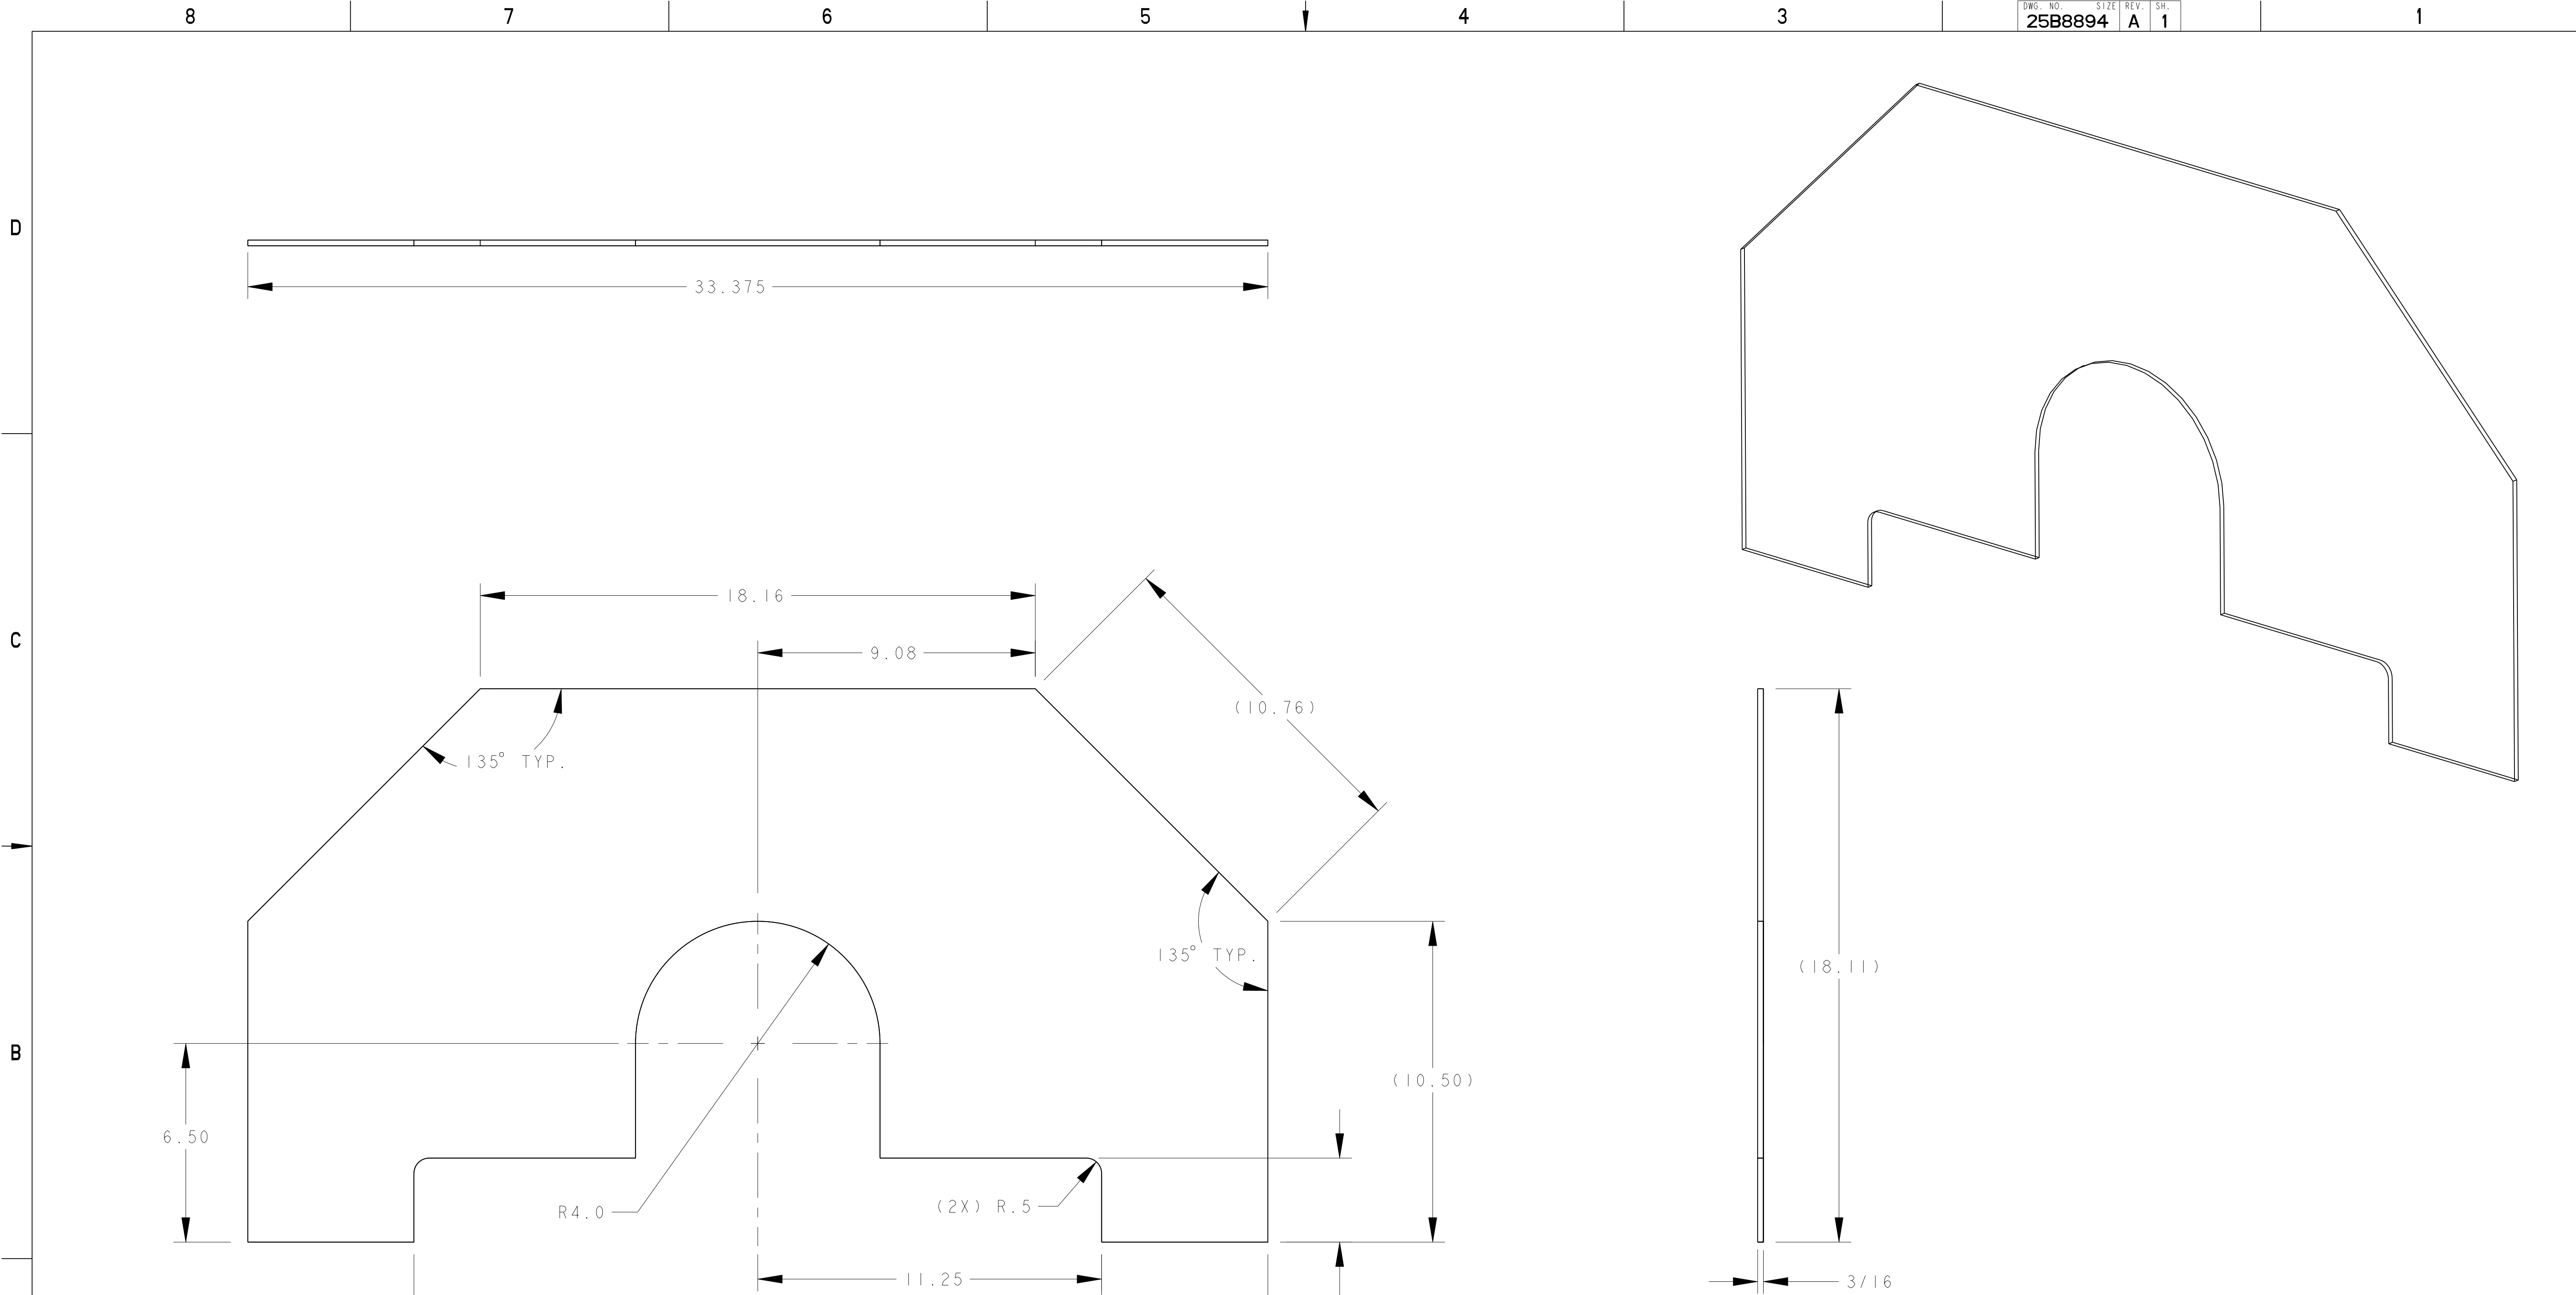


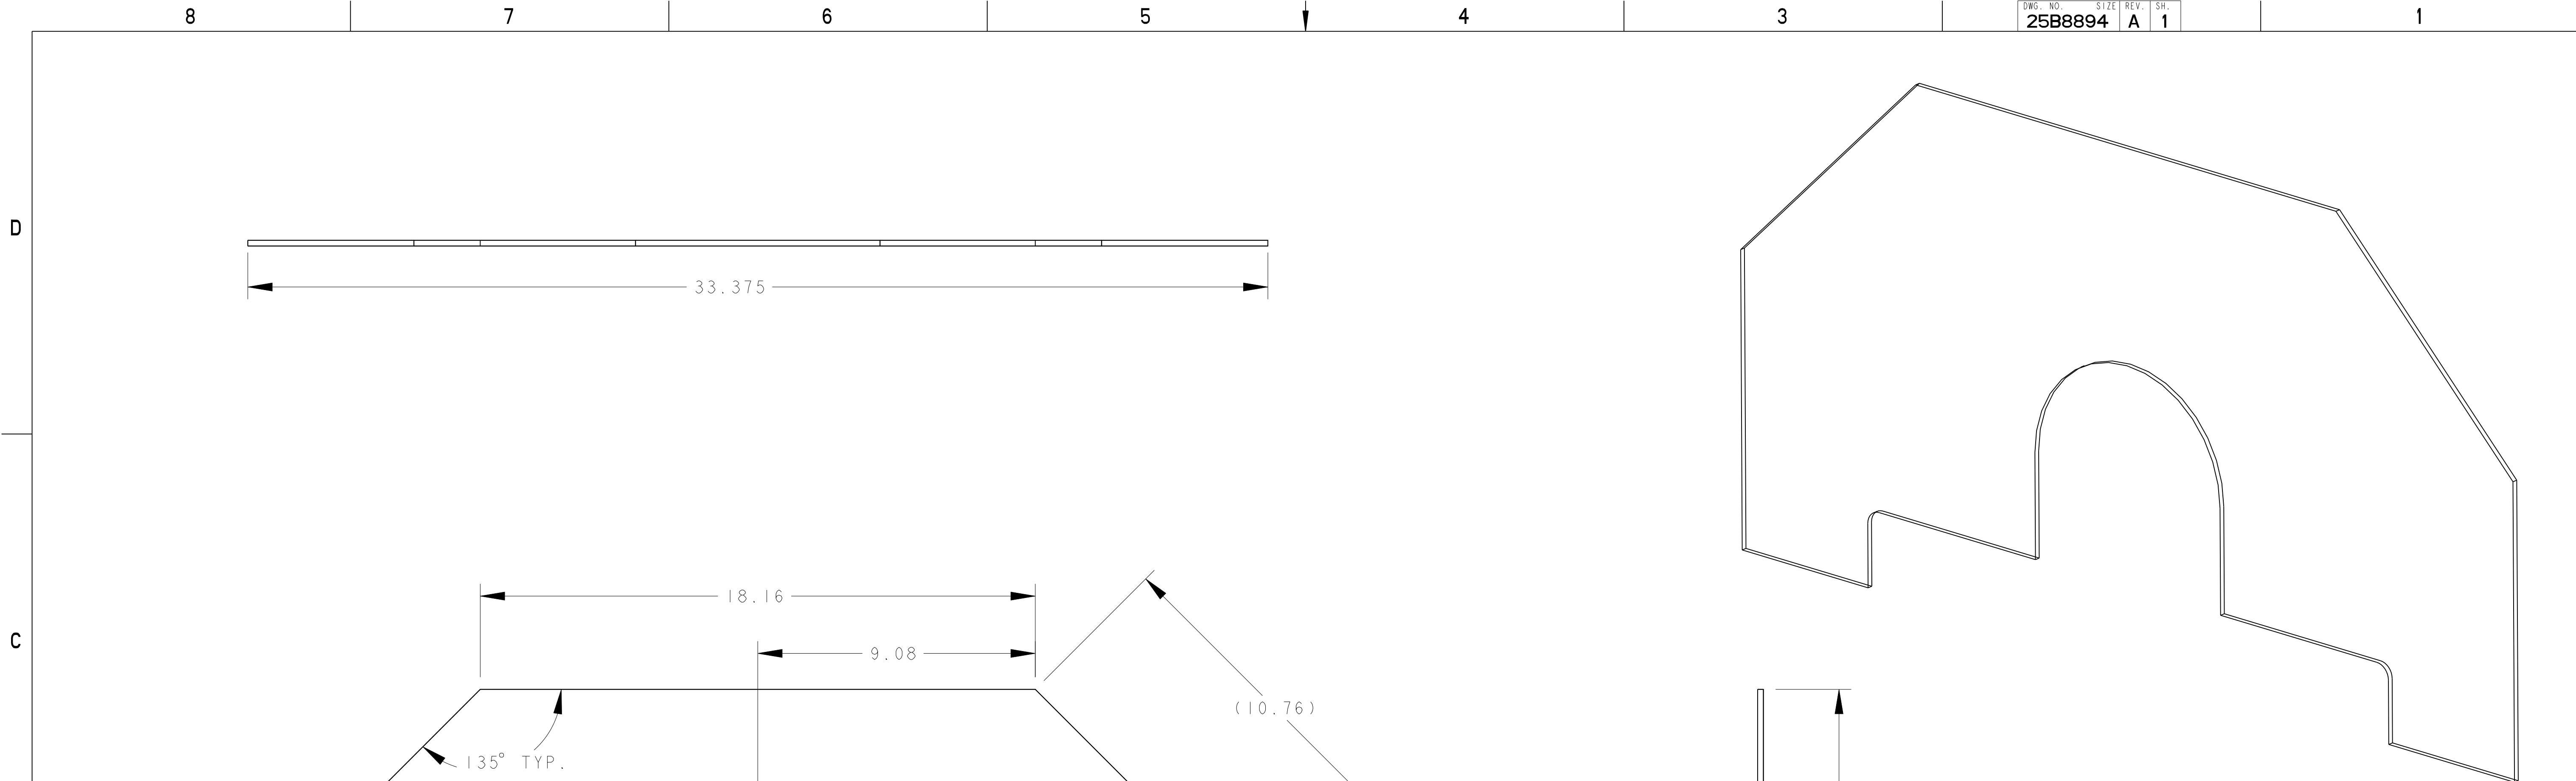

8 7 6 5 4 3 25B8894 A 1 1

D

C

B

A

33.375

18.16

9.08

(10.76)

135° TYP.

10.50

6.50

R4.0

(2X) R.5

11.25

22.50

16.69

(2X) 2.75

(18.11)

3/16

UNLESS OTHERWISE SPECIFIED	
PROJECTION:	
TOLERANCES	X.X ± 0.1 FRAC. ± 1/64
	X.XX ± 0.03 Angles ± 1.0°
	X.XXX ± 0.010 FINISH
DO NOT SCALE PRINT	
THREADS ARE CLASS 2	
CHAMFER ENDS OF ALL SCREW THREADS 30°	
CUT ROUND, 1.5 THREAD RELIEF ON MACHINED THREADS	
BREAK EDGES .016 MAX. ON MACHINED WORK	
REMOVE BURRS, WELD SPLATTER & LOOSE SCALE	
IN ACCORDANCE WITH ASME Y14.5M & B46.1	

SHOP ORDERS	
ACCT. NO.	SER. NO.
NO.	DATE
REQD.	ISSD.
	DATE
	REC'D.

ERNEST ORLANDO LAWRENCE BERKELEY NATIONAL LABORATORY	
UNIVERSITY OF CALIFORNIA - BERKELEY	

SNS-FES MEBT	
MECHANICAL SUB-SYSTEMS	
QUAD ELECTRICAL COVER, FRONT	

MICROFILMED:	
DWG. TYPE	SHOWN ON
PART	-

PATENT CLEAR:	
DESIGN ACCT. NO.	CATEGORY CODE
-	FE3330

SHEET 1 OF 1	
DWG. NO.	SIZE
25B8894	A

REV.	
REV	DWG
CHK	ZONE
DATE	INITIAL RELEASE
CHANGES	