



NOTES: (UNLESS OTHERWISE SPECIFIED)

- THIS IS A CRYOGENIC VACUUM COMPONENT.
- WELDING PROCEDURE: PER VENDOR SPECIFICATION WITH LBNL APPROVAL.
- CLEANING PROCEDURE : PER VENDOR SPECIFICATION WITH LBNL APPROVAL.
- PACKAGING AND STORAGE PROCEDURE OF THE COMPONENTS: PER VENDOR SPECIFICATION WITH LBNL APPROVAL.
- DIMENSIONS AND TOLERANCING PER ANSI Y14.5M-1982. UNITS ARE IN INCHES [mm] UNLESS OTHERWISE SPECIFIED.
- USE OF SULFUR OR SILICONE BEARING OILS, LUBRICANTS, OR COOLANTS ARE STRICTLY PROHIBITED.
- USE OF RESIN OR RUBBER BONDED ABRASIVES UNDER POWER IS STRICTLY PROHIBITED. USE VITREOUS BONDED ABRASIVES ONLY.
- VENDOR SUGGESTED CHANGES TO WELD PREPS; SUBJECT TO LBNL APPROVAL.
- FITTINGS MAY BE USED IN PLACE OF BENDS; SUBJECT TO LBNL APPROVAL.
- VENDOR SUGGESTED CHANGES TO TOLERANCES TO FACILITATE FABRICATION OR ASSEMBLY; SUBJECT TO LBNL APPROVAL.
- REMOVE ALL THE BURRS AND REAM THE ENDS FOR CIRCULARITY AND CLEAN ENDS.
- TUBE END SURFACE MUST BE PERPENDICULAR TO THE TUBE AXIS WITHIN +/- .010.
- PERFORM ACCEPTANCE TESTS PER SECTION 3.2 OF LBNL SPECIFICATION M856.
- A MARK DESIGNATING THE INSTALLED LENGTH WILL BE UTILIZED DURING FINAL INSTALLATION OF THE FEEDBOX ASSEMBLY. MARK, SCRIBE OR ETCH THIS LOCATION IN A PERMANENT MANNER, SUBJECT TO LBNL APPROVAL, TO AN ACCURACY OF ±0.063".
- PROVIDE A MINIMUM LENGTH OF 4.0" OF STRAIGHT, SMOOTH PIPE ON THE INDICATED SIDE OF THE INSTALLED LENGTH MARK FOR PIPE WELDING DURING FINAL INSTALLATION OF THE FEEDBOX ASSEMBLY.
- PIPE MUST BE STRAIGHT AND SMOOTH (NO BUMPS) FOR 0.5" ON EITHER SIDE OF THE CENTER-PLANE OF THE SUPPORT.
- CAP BOTH ENDS OF PIPE AFTER ACCEPTANCE TESTS PER SECTION 3.2 OF LBNL SPECIFICATION M856.

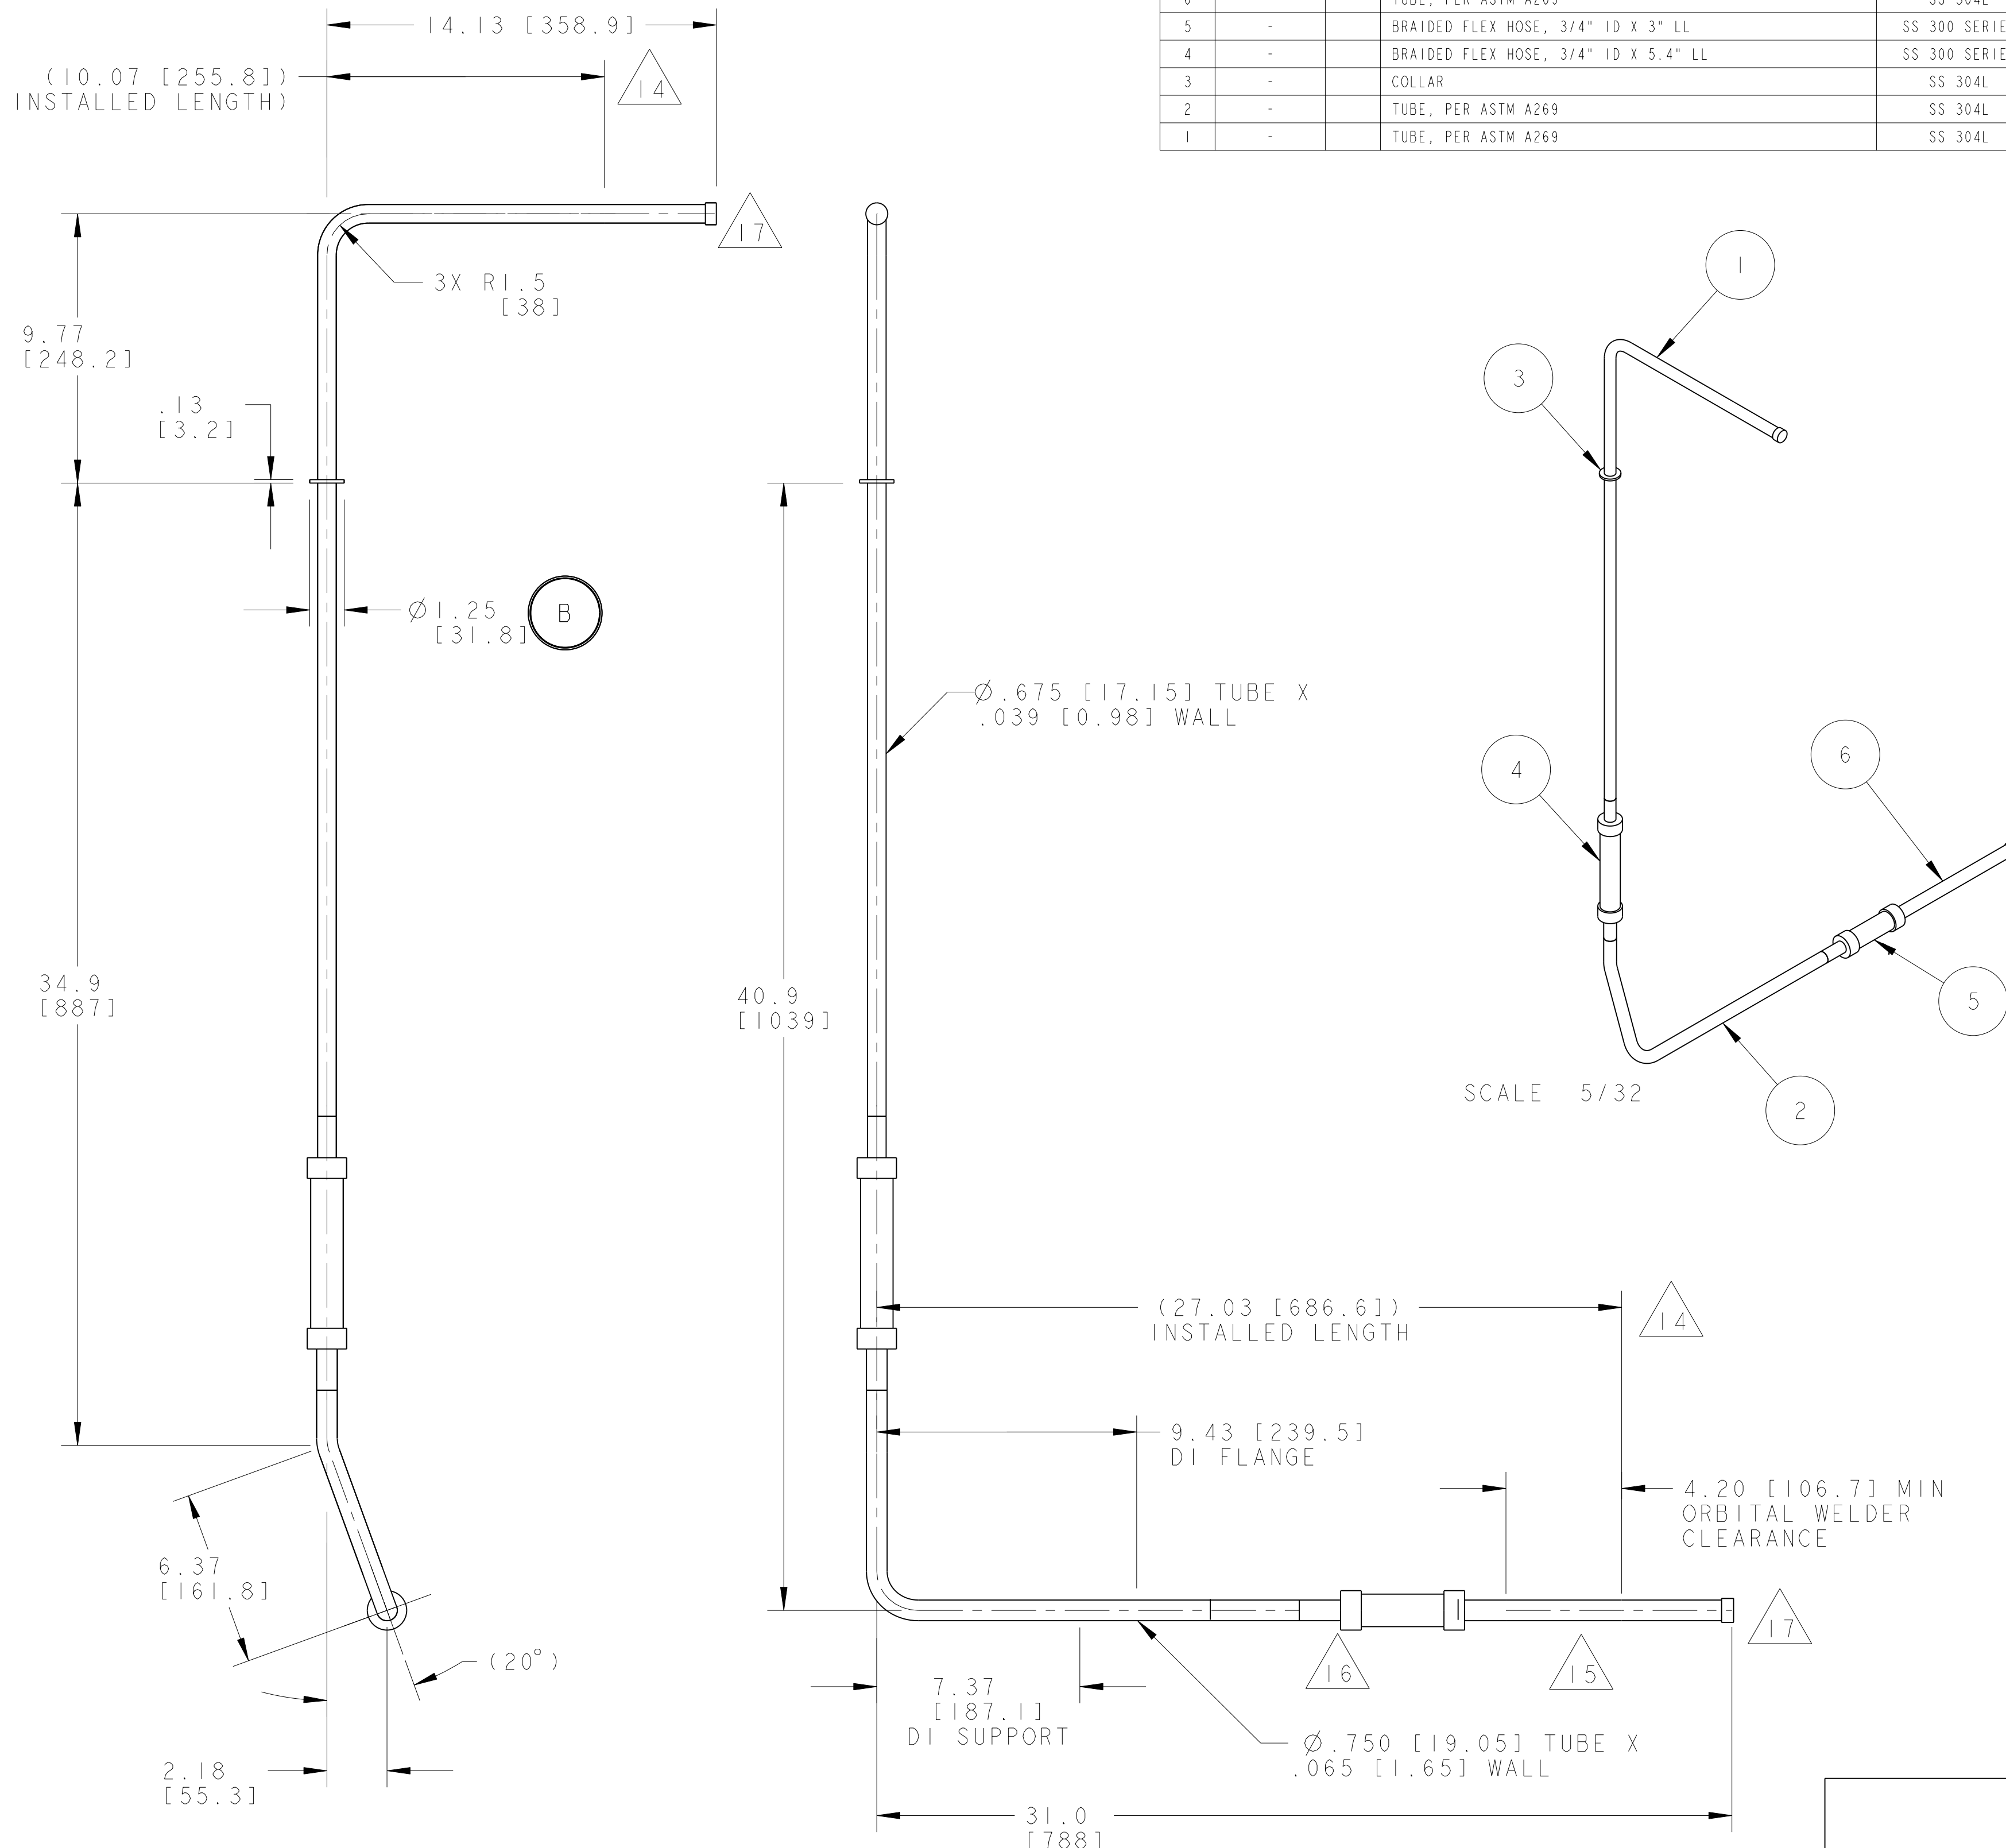

ITEM	PART NO	RECD	DESCRIPTION	MATERIAL
6	-	-	TUBE, PER ASTM A269	SS 304L
5	-	-	BRAIDED FLEX HOSE, 3/4" ID X 3" LL	SS 300 SERIES
4	-	-	BRAIDED FLEX HOSE, 3/4" ID X 5.4" LL	SS 300 SERIES
3	-	-	COLLAR	SS 304L
2	-	-	TUBE, PER ASTM A269	SS 304L
1	-	-	TUBE, PER ASTM A269	SS 304L

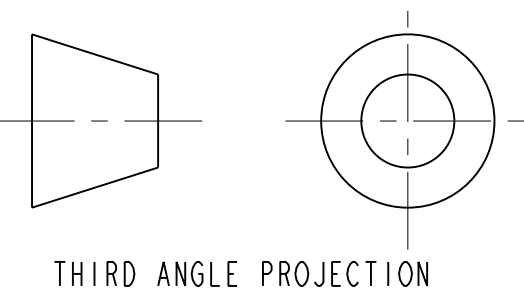

UNLESS OTHERWISE SPECIFIED		SHOP ORDERS		SER. NO. -		ERNEST ORLANDO LAWRENCE	
X.X ± 0.1	FRAC. ± 1/64	ACCT. NO. y	NO. RECD. y	NO. ISSD.	DATE	BERKELEY NATIONAL LABORATORY	
X.XX ± 0.03	Angles ± 1.00°	DEL. TO. y		DATE	RECD.	UNIVERSITY OF CALIFORNIA - BERKELEY	
X.XXX ± 0.010	FINISH 125 $\sqrt{Ra}$	SURFACE TREATMT		*** (repeat) ***		LHC IR FEEDBOX	
DO NOT SCALE PRINT				IDENT. METHOD		CRYOGENICS	
THREADS ARE CLASS 2				PROJECT NUMBER		PIPE, E2	
CHAMFER ENDS OF ALL SCREW THREADS 30°				PROJECT NAME		MICROFILMED: _____	
CUT ROUND, 1.5 THREAD RELIEF ON MACHINED THREADS				DWG. BY: R LA MANTIA		DWG. TYPE: ASSEM	
BREAK EDGES .016 MAX. ON MACHINED WORK				DATE: 15-Jul-02		SHOWN ON: 251226	
REMOVE BURRS, WELD SPLATTER & LOOSE SCALE				CHK. BY: Jon Zbasnik		SCALE: 1/4	
IN ACCORDANCE WITH ASME Y14.5M & B46.1				DATE: 4-02-02		DO NOT SCALE PRINTS	
				APR. BY: Jon Zbasnik		PATENT CLEAR: _____	
				DATE: 4-02-02		DESIGN ACCT. NO. Z5LCE2	
						CATEGORY CODE LH2003	
						DWG. NO. 2512144	
						SIZE B	
						REV. _____	