
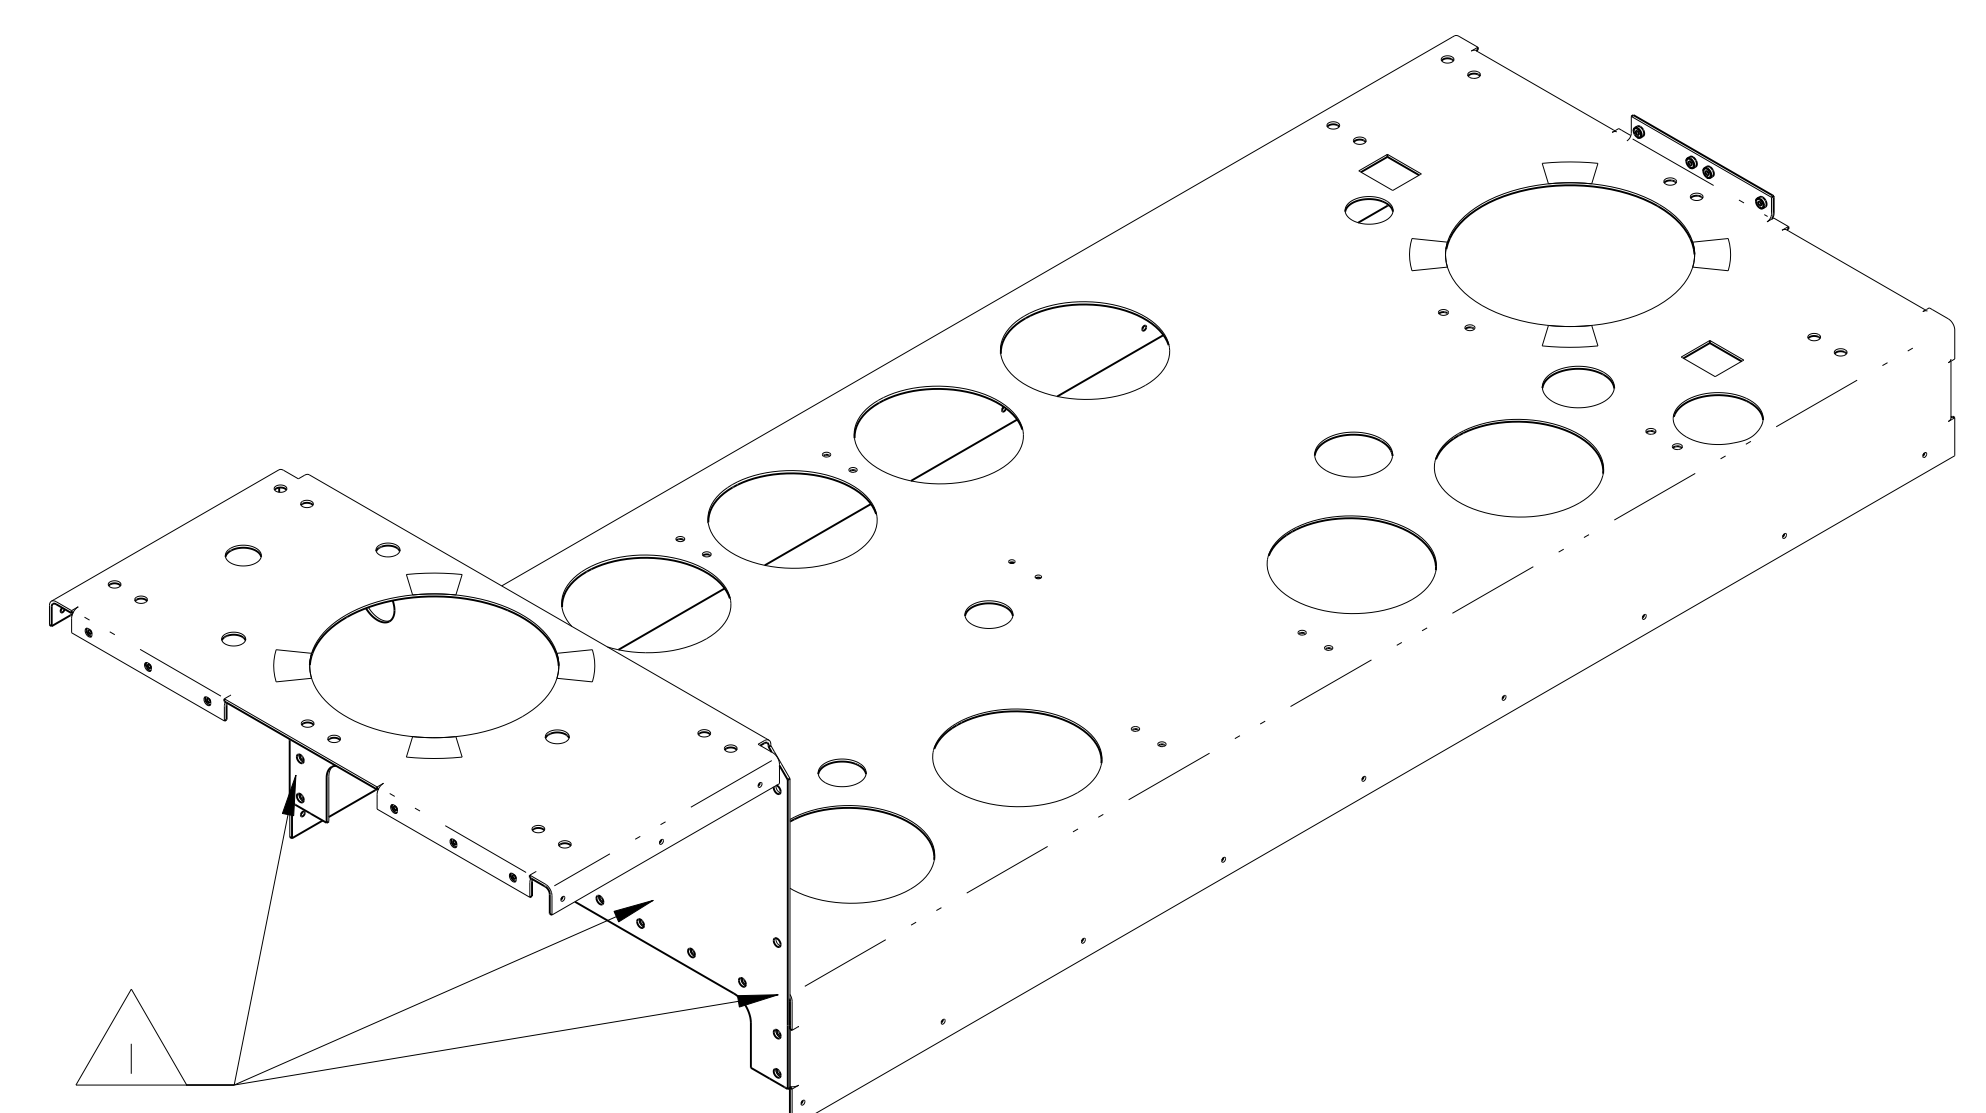


8 7 6 5 4 3 2 1



D

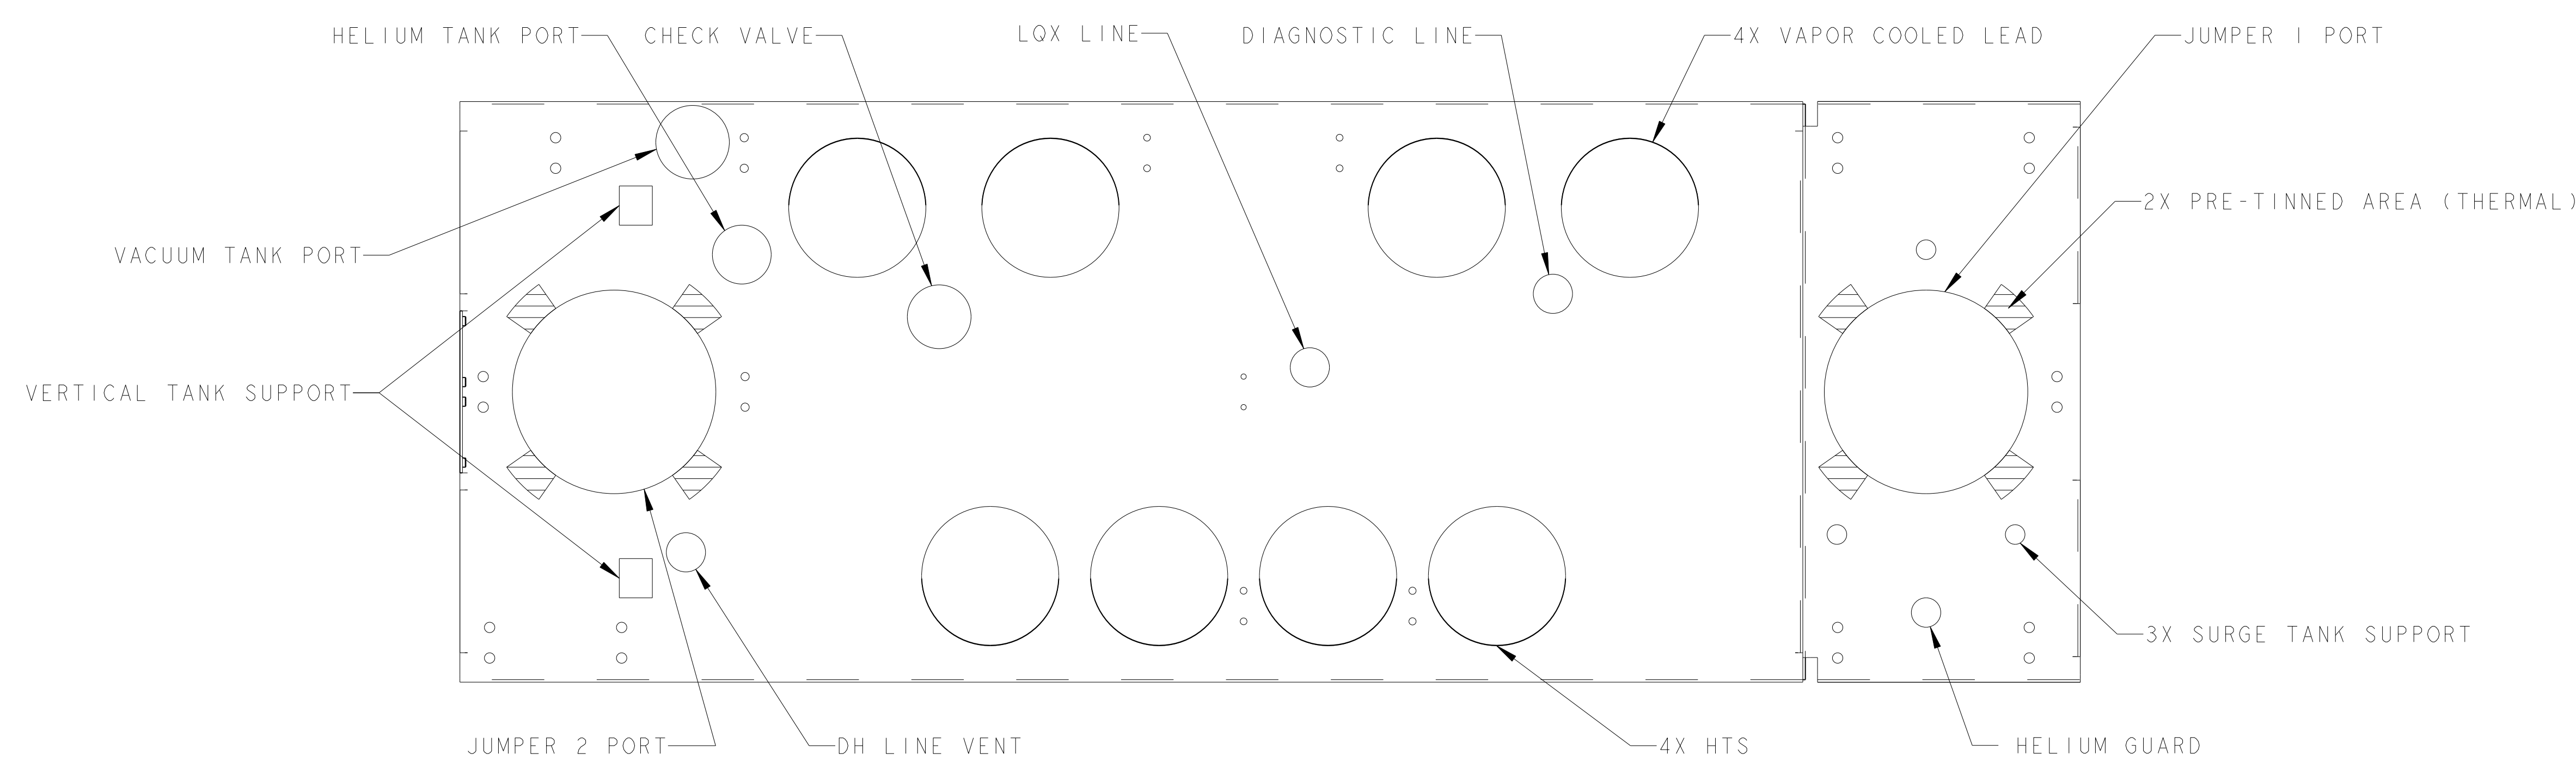

SCALE 1/8


C

B

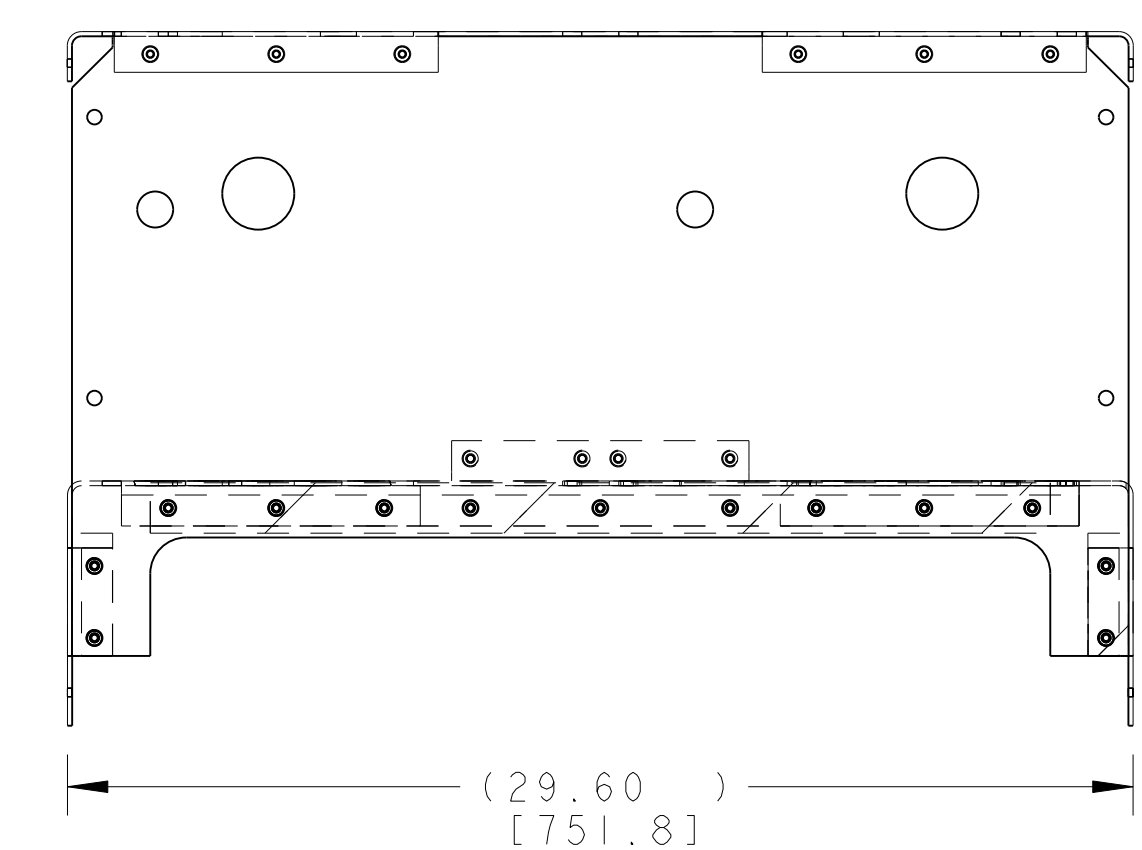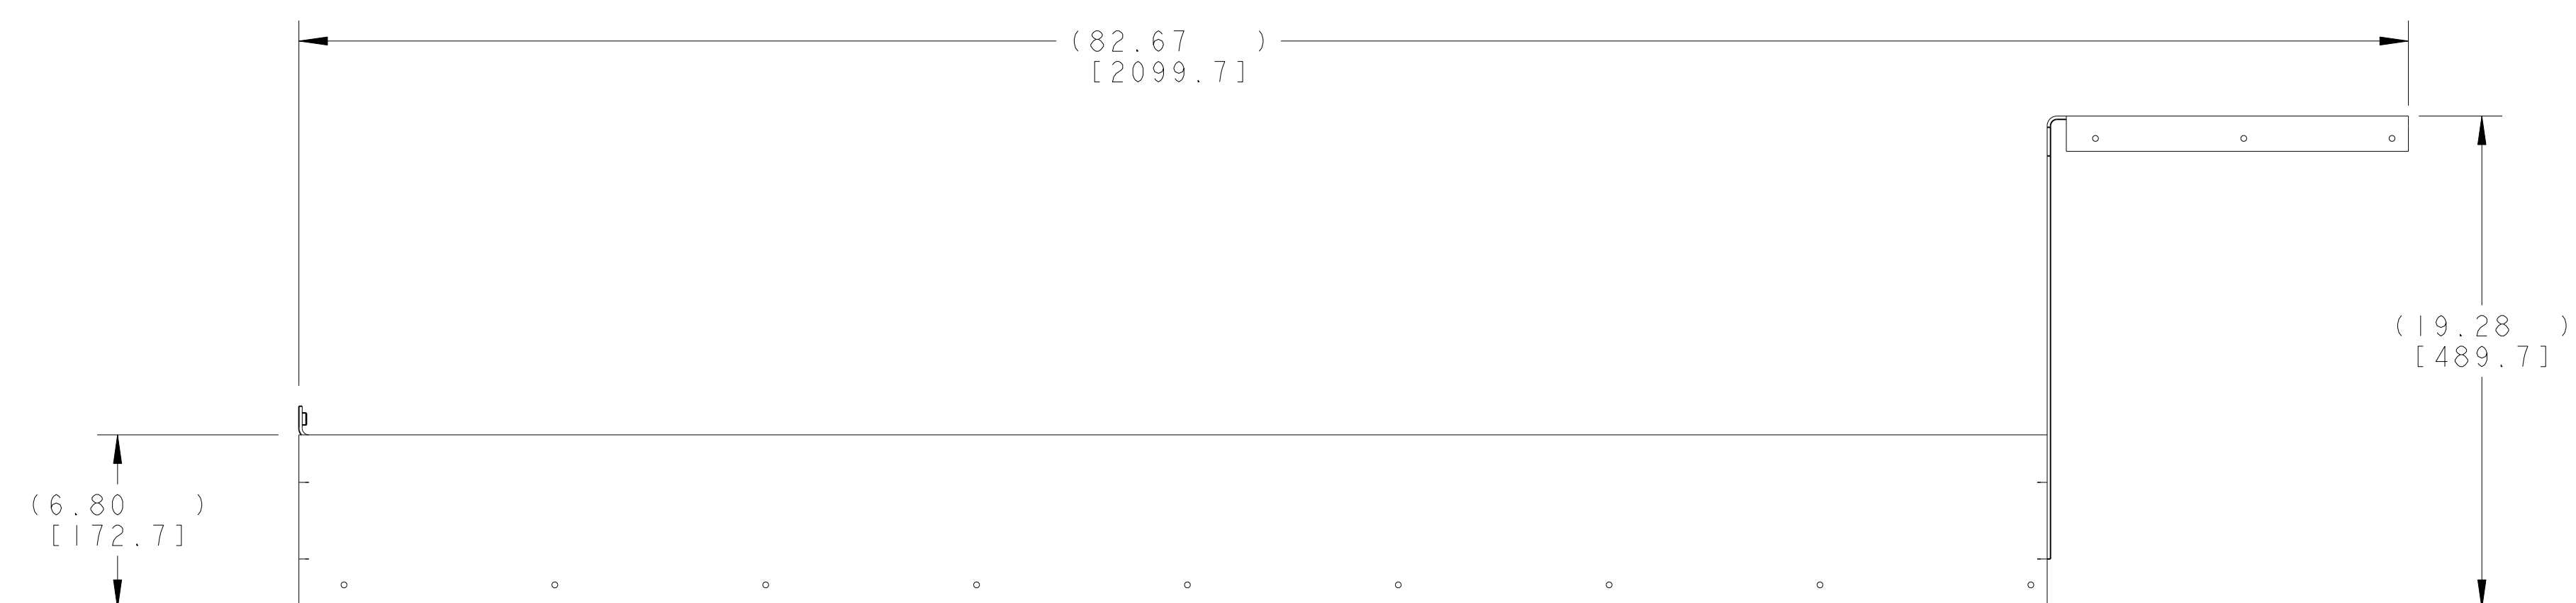


NOTES: (UNLESS OTHERWISE SPECIFIED)

1. ITEMS 1 AND 2 ASSEMBLED WITH FASTENERS IN NEXT ASSEMBLY, THEN RE-FLOW SOLDER FOR THERMAL CONDUCTIVITY.
2. THIS IS A CRYOGENIC VACUUM COMPONENT.
3. WELDING PROCEDURE: PER VENDOR SPECIFICATION WITH LBNL APPROVAL.
4. CLEANING PROCEDURE: PER VENDOR SPECIFICATION WITH LBNL APPROVAL.
5. PACKAGING AND STORAGE PROCEDURE OF THE COMPONENTS: PER VENDOR SPECIFICATION WITH LBNL APPROVAL.
6. DIMENSIONS AND TOLERANCING PER ANSI Y14.5M-1982. UNITS ARE IN INCHES [mm] UNLESS OTHERWISE SPECIFIED.
7. USE OF SULFUR OR SILICONE BEARING OILS, LUBRICANTS, OR COOLANTS ARE STRICTLY PROHIBITED.
8. USE OF RESIN OR RUBBER BONDED ABRASIVES UNDER POWER IS STRICTLY PROHIBITED. USE VITREOUS BONDED ABRASIVES ONLY.
9. PROTECT FINISHED PART BY BAGGING OR SIMILAR METHOD TO PROTECT AND MAINTAIN CLEANLINESS DURING SHIPMENT AND STORAGE.

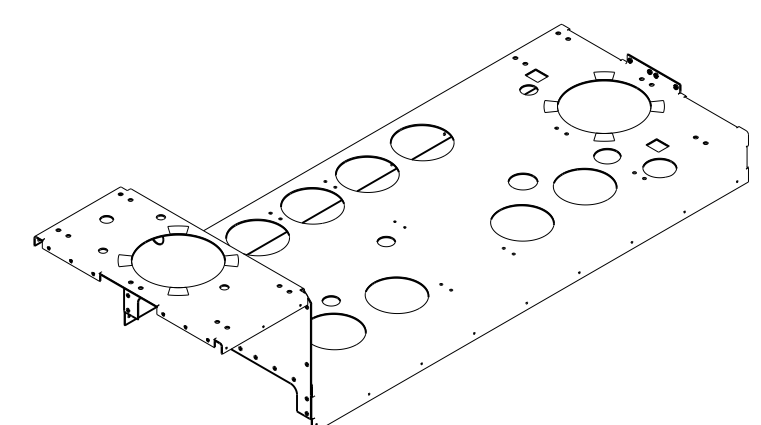

SCALE 3/64

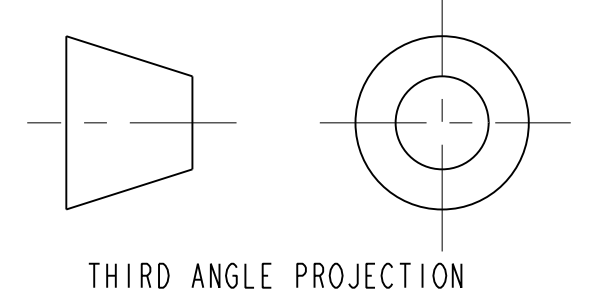

THIRD ANGLE PROJECTION

2	251071	1	TOP SHIELD, DFBXA/DFBXC/DFBXC	COPPER, OFHC, C101
1	251624	1	TOP COVER, NEGATIVE SD, DFBXC/DFBXC	COPPER, OFHC, C101
ITEM	PART NO.	RECD	DESCRIPTION	MATERIAL
SHOP ORDERS UNLESS OTHERWISE SPECIFIED COORDINATES: X.X ± 0.1 FRACTION ± 1/64 X.XX ± 0.03 ANGLES ± 1.00° X.XXX ± 0.010 FINISH: 45√ DO NOT SCALE PRINT THREADS ARE CLASS 2 CHAMFER ENDS OF ALL SCREW THREADS 30° CUT ROUNDS, 1.5 THREAD RELIEF ON MACHINED THREADS BREAK EDGES .015 MAX. ON MACHINED WORK REMOVE BURRS, WELD SPATTER & LOOSE SCALE IN ACCORDANCE WITH ADP 114.5M 1 EN 1				
ERNEST ORLANDO LAWRENCE BERKELEY NATIONAL LABORATORY UNIVERSITY OF CALIFORNIA - BERKELEY LHC IR FEEDBOX CRYOGENICS THERMAL SHIELD ASSY, DFBXA				
MICROFILMED: DATE 04-Aug-02 DWG. TYPE: ASSEM DESIGN ACCT. NO: Z5LCE2 CATEGORY CODE: LH2003		SCALE: 3/16 SHEET 1 OF 1 DWG. NO.: 2515896 SIZE: A		

8 7 6 5 4 3 2 1

2515896 A 1