

D

C

B

A

D




C

B

A

NOTES:

1. BRAZING TO BE CONDUCTED IN A VACUUM FURNACE. REFER TO LBNL ENGINEERING NOTE #M7184, MIRROR BRAZING TECHNIQUES.
2. TOLERANCES SHOWN IN THE DRAWING TITLE BOX ARE SHOWN IN INCHES.

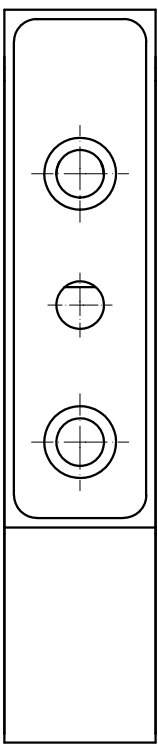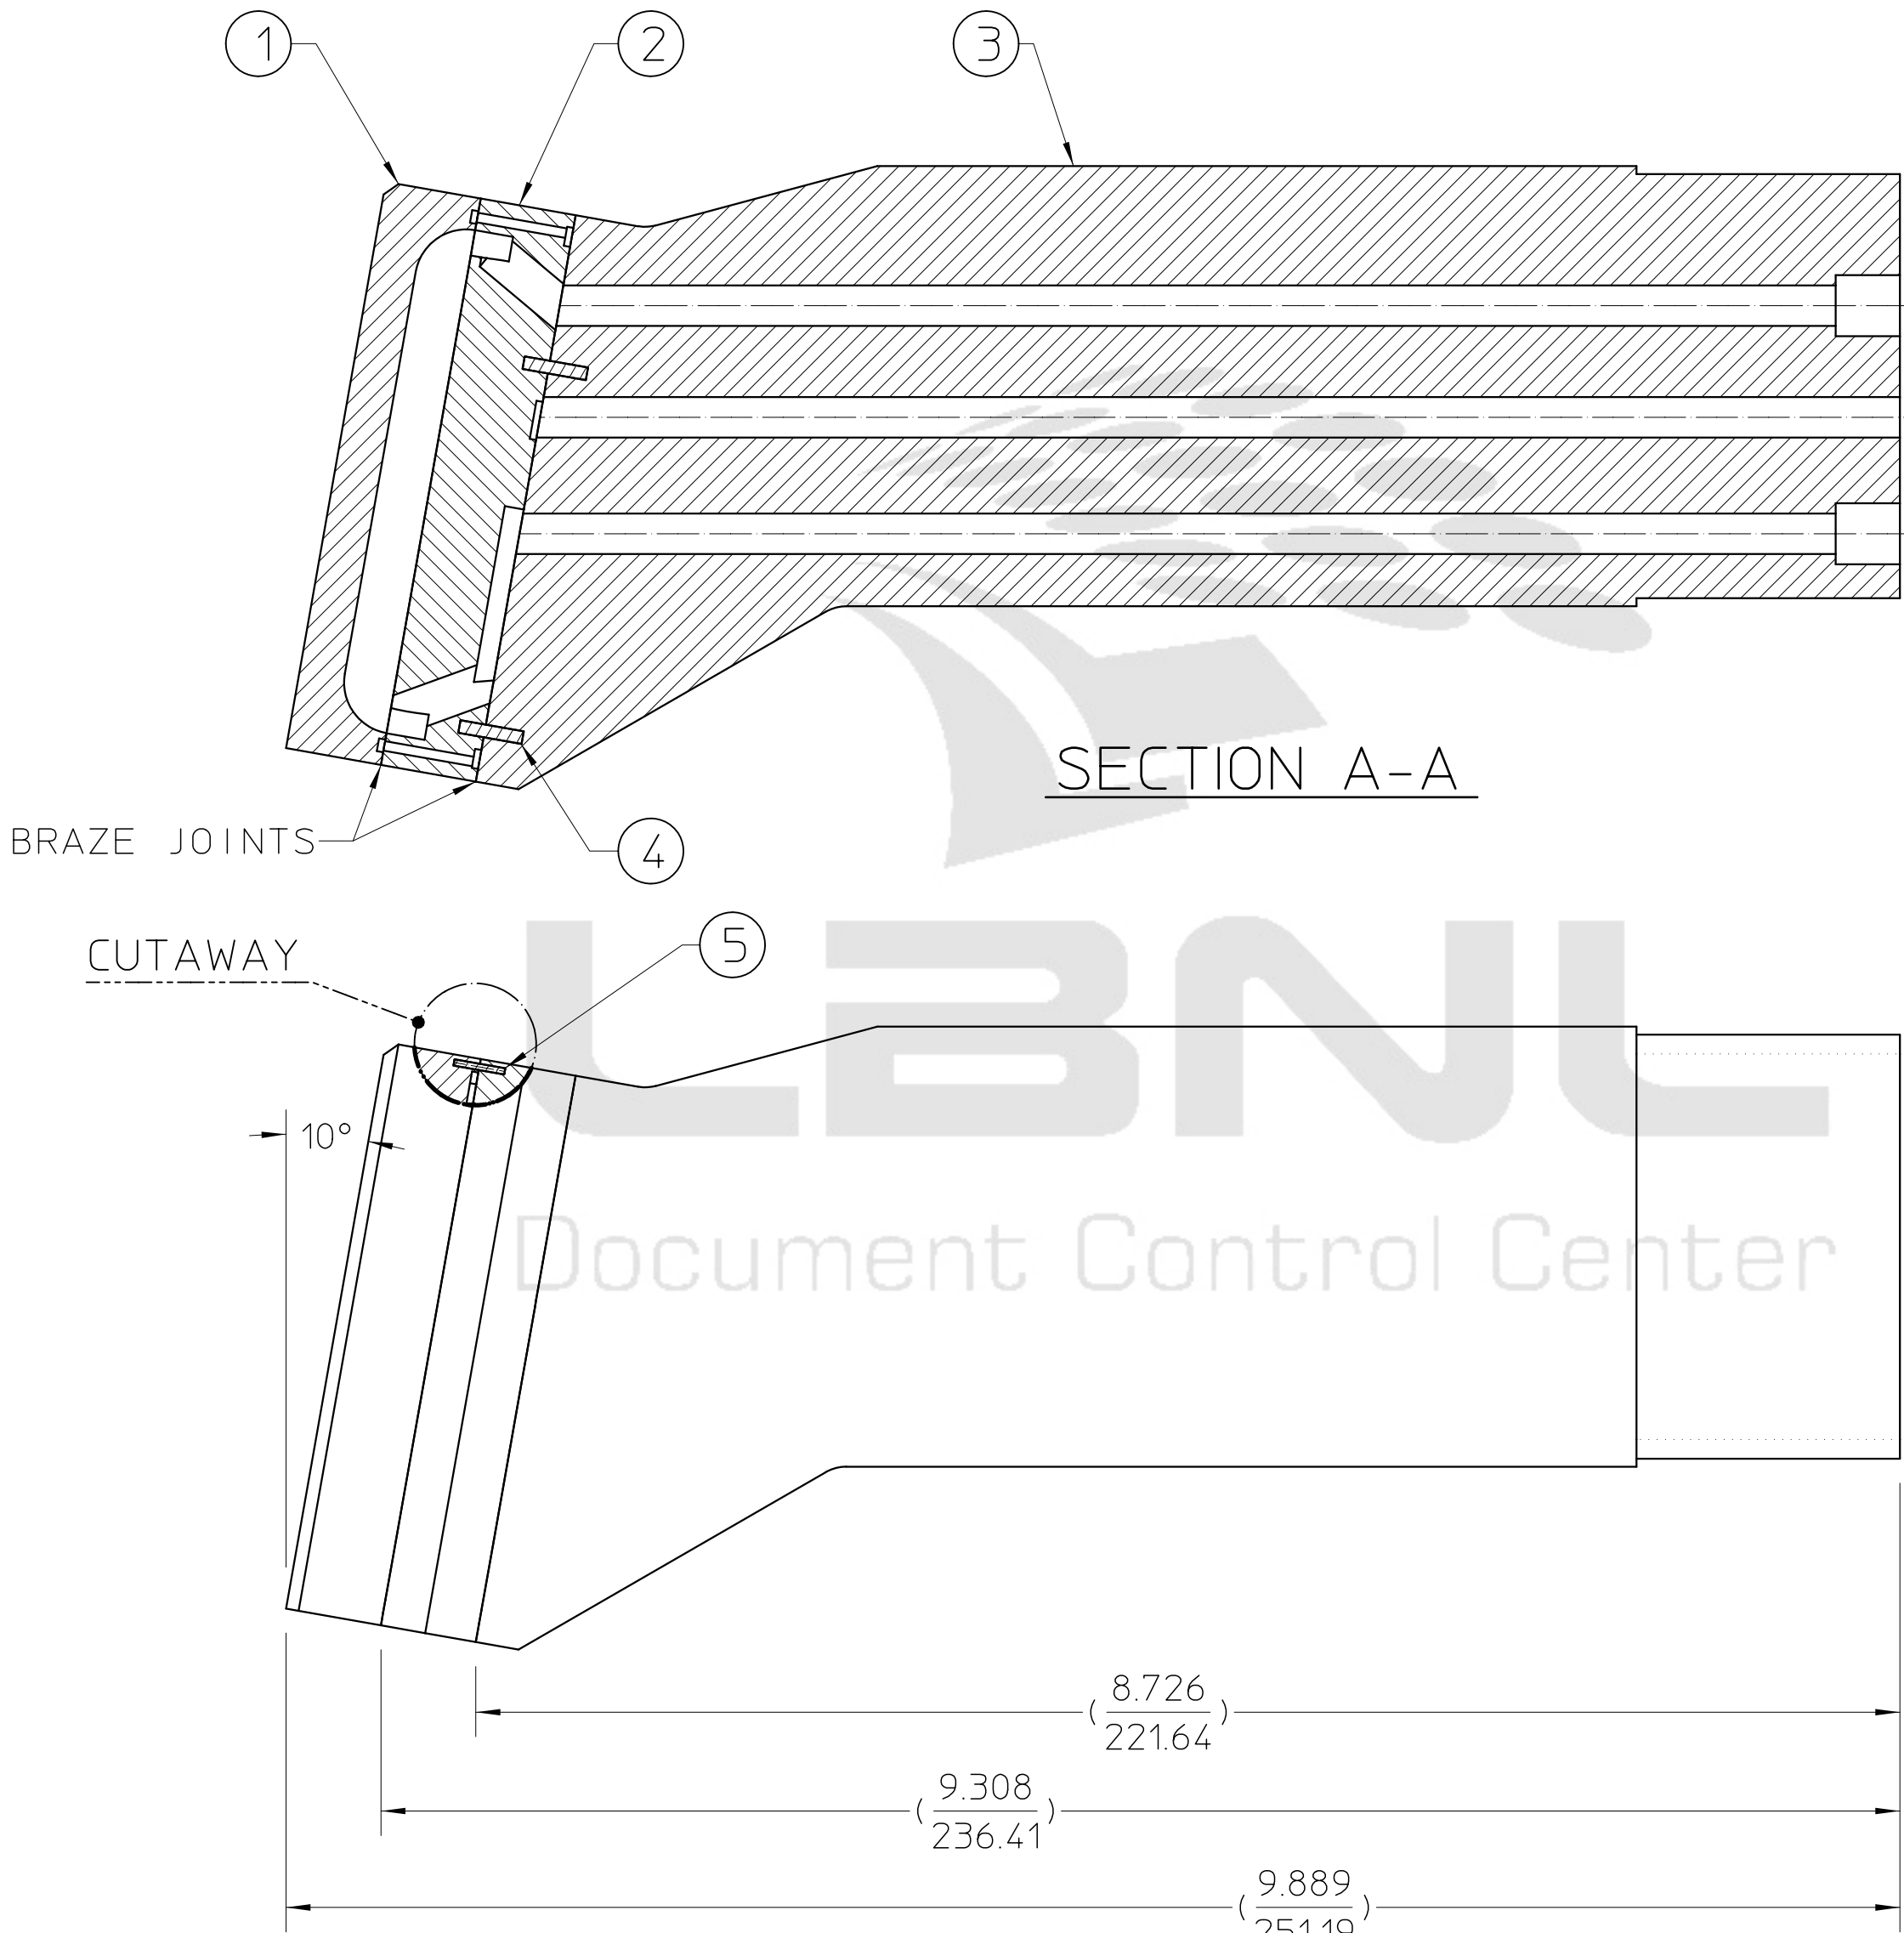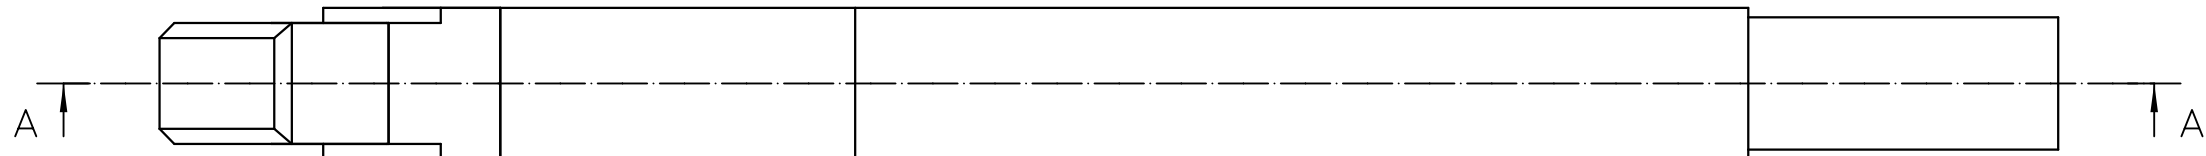

(UNIQUE ID No.: AL-0008-9821)

-	-	-	-
-	-	-	-
2	5	-	DOWEL PIN, 1.0mm OD x 8.0mm LONG, ST. STL.
2	4	-	DOWEL PIN, 2.0mm OD x 10.0mm LONG, ST. STL.
1	3	26B526	SPLITTER MASK COOLING BRAZE PLATE
1	2	26B525	SPLITTER MASK COOLING SUPPLY BLOCK
1	1	26B524	SPLITTER MASK COOLING BLOCK
RECD	ITEM	PART NO.	DESCRIPTION

PROJECT NAME:	PROJECT NUMBER:	ERNEST ORLANDO LAWRENCE BERKELEY NATIONAL LABORATORY UNIVERSITY OF CALIFORNIA
DO NOT SCALE PRINT SCALE: 1 : 1		CATEGORY CODE: AL 4 1 6 0
THIRD ANGLE PROJECTION		SHEET 1 OF 1
SIZE: D		DWG NO: 26B527
REV A		

UNLESS OTHERWISE SPECIFIED	PROJECT NAME:	PROJECT NUMBER:
TOLERANCES	FRACTIONS: * - / - -	ANGLES: * 0.1°/INCH
MACH. SURFS.: 63	OR BETTER	REF: ASME Y14.5M-1994, THREADS ARE CLASS 2
BREAK EDGES .016 MAX. ON MACHINED WORK	REMOVE BURRS, WELD SPATTER & LOOSE SCALE	

REV	A	cummings	plate	07-26-20	INITIAL REVISION
REV	AUTHOR	APPROVER	DATE	CHANGE	DESCRIPTION