


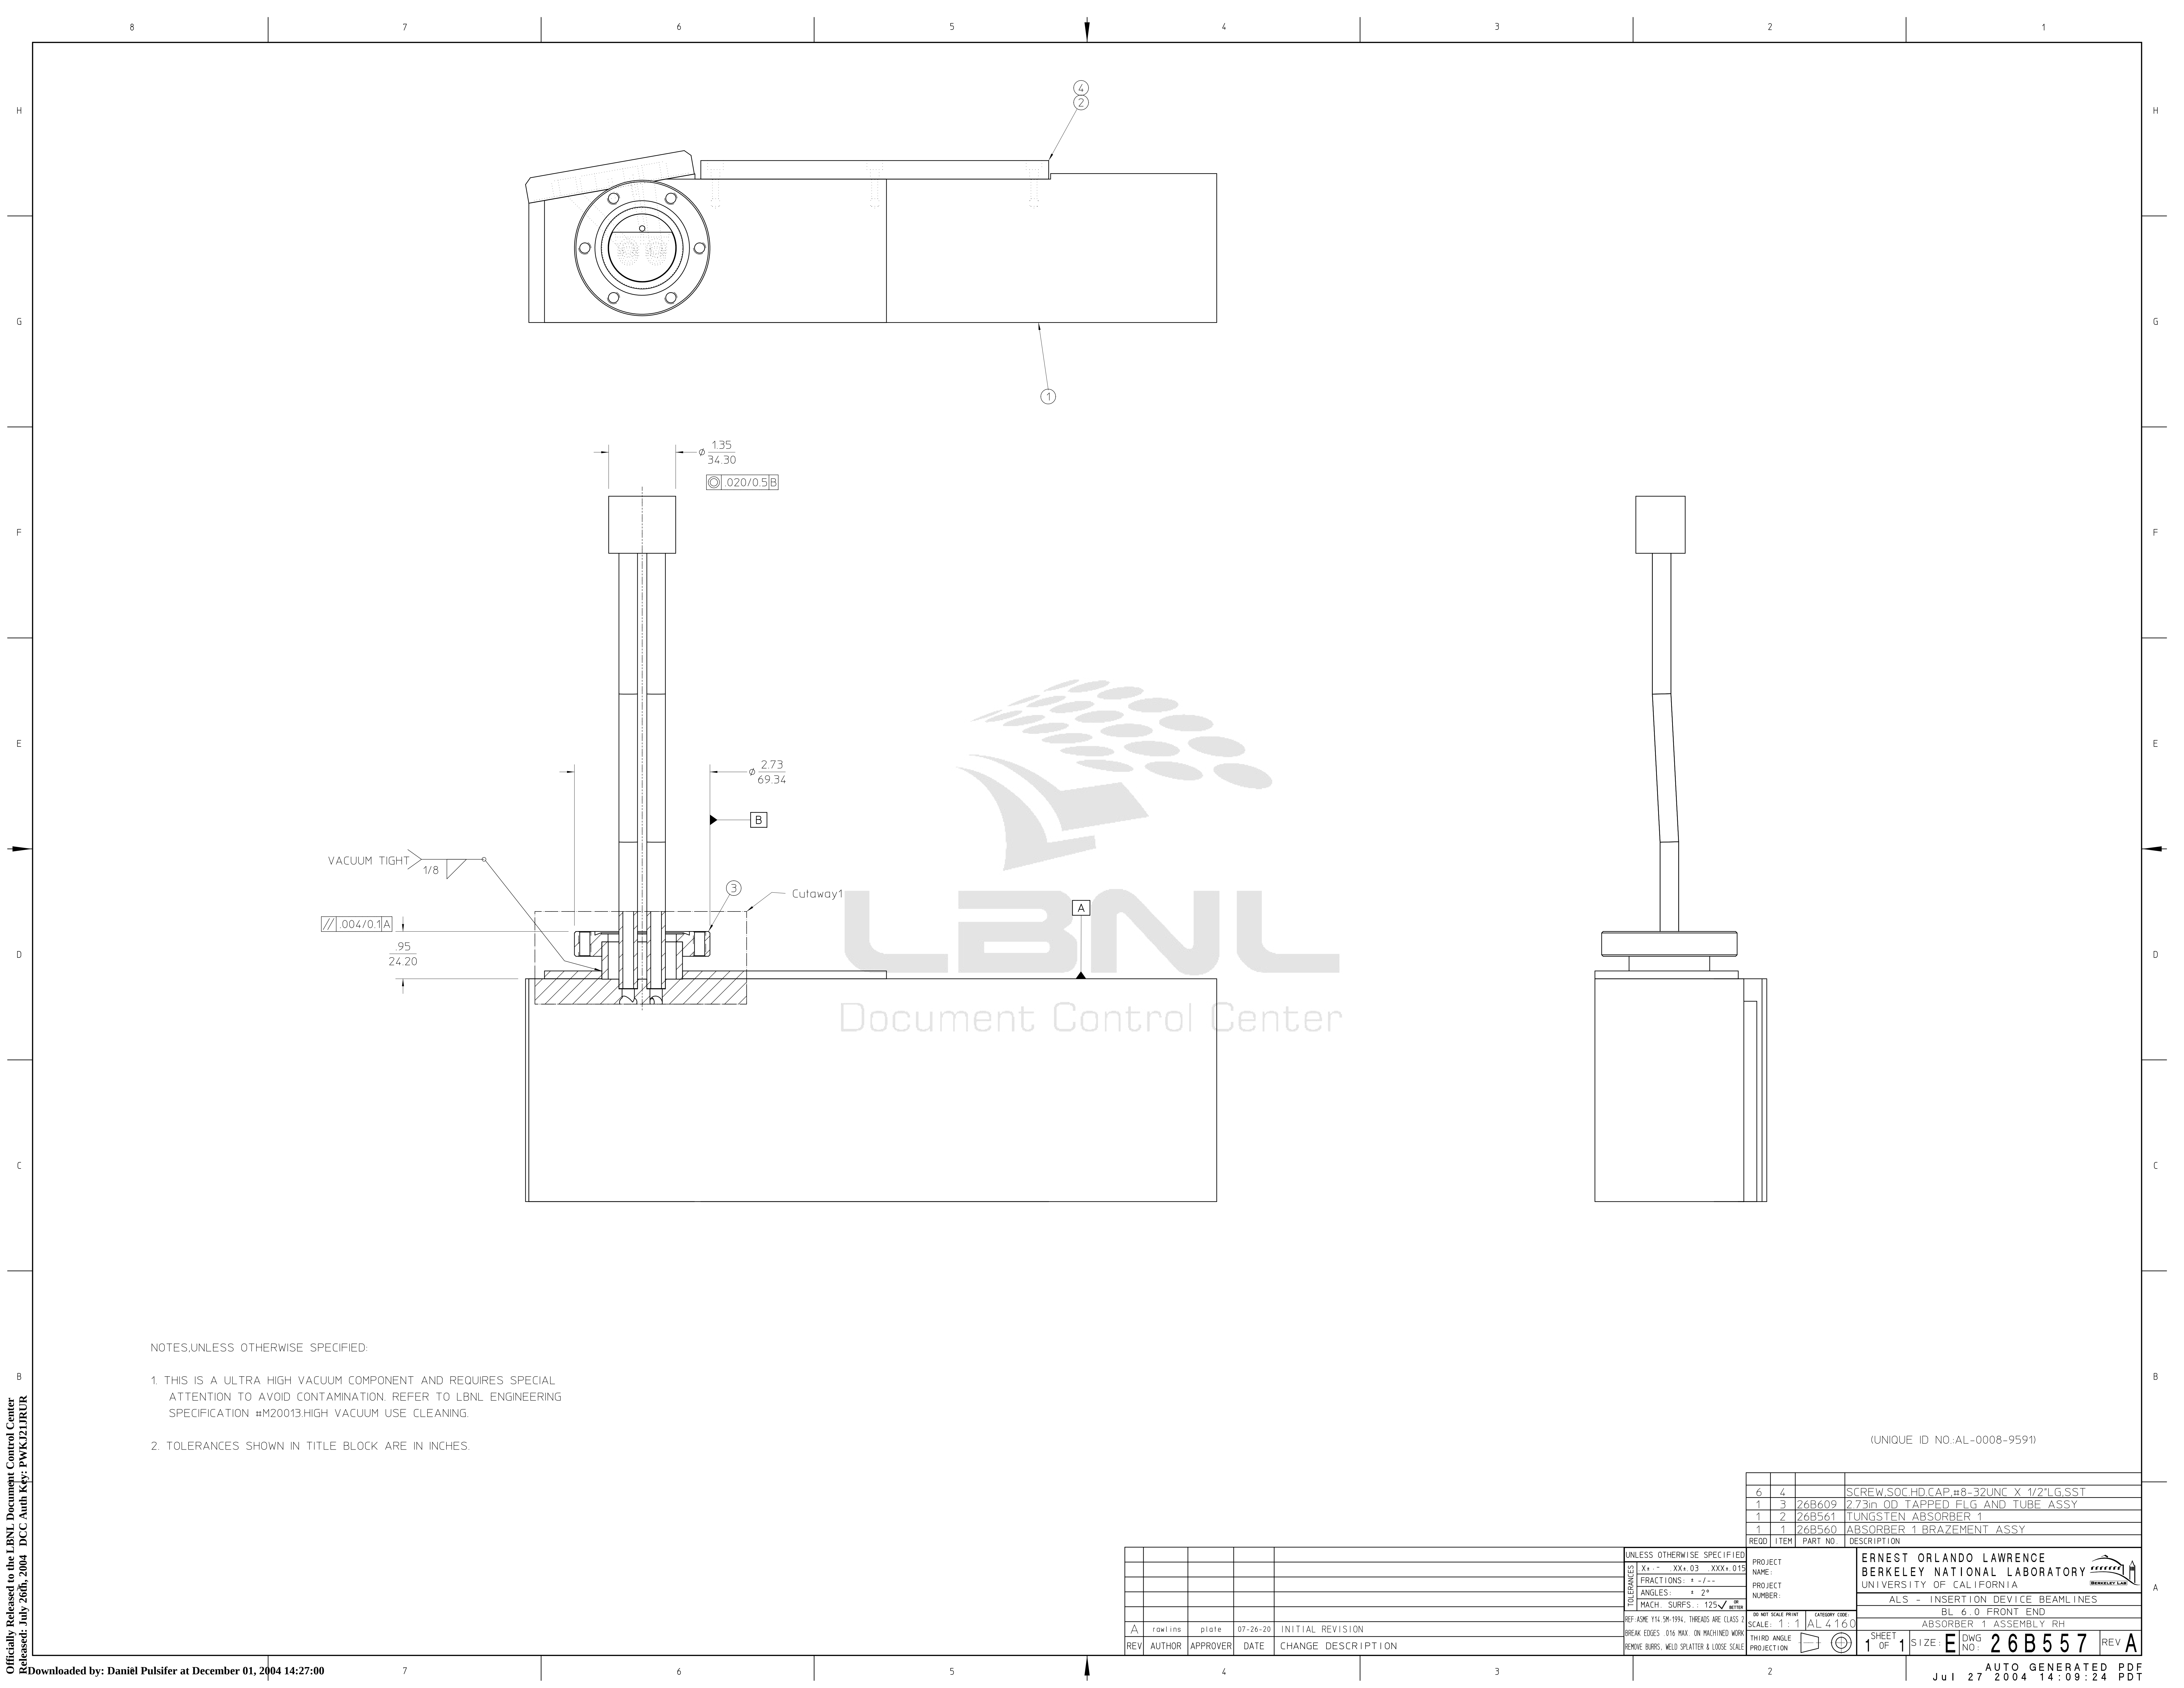

NOTES, UNLESS OTHERWISE SPECIFIED:

- THIS IS A ULTRA HIGH VACUUM COMPONENT AND REQUIRES SPECIAL ATTENTION TO AVOID CONTAMINATION. REFER TO LBNL ENGINEERING SPECIFICATION #M20013.HIGH VACUUM USE CLEANING.
- TOLERANCES SHOWN IN TITLE BLOCK ARE IN INCHES.

(UNIQUE ID NO.:AL-0008-9591)

|  |  |  |  |                                            |  |  |  |
|--|--|--|--|--------------------------------------------|--|--|--|
|  |  |  |  | UNLESS OTHERWISE SPECIFIED                 |  |  |  |
|  |  |  |  | PROJECT NAME: X+ - XX+ .03 - XXX+ .015     |  |  |  |
|  |  |  |  | PROJECT NUMBER: FRACTIONS: + - / - -       |  |  |  |
|  |  |  |  | MACH. SURFS.: 125 ✓ BETTER                 |  |  |  |
|  |  |  |  | REF: ASME Y14.5M-1994, THREADS ARE CLASS 2 |  |  |  |
|  |  |  |  | BREAK EDGES .016 MAX. ON MACHINED WORK     |  |  |  |
|  |  |  |  | REMOVE BURRS, WELD SPATTER & LOOSE SCALE   |  |  |  |
|  |  |  |  | THIRD ANGLE PROJECTION                     |  |  |  |
|  |  |  |  | SCALE: 1: 1                                |  |  |  |
|  |  |  |  | SHEET 1 OF 1                               |  |  |  |
|  |  |  |  | SIZE E                                     |  |  |  |
|  |  |  |  | DWG NO: 26B557                             |  |  |  |
|  |  |  |  | REV A                                      |  |  |  |