

4


3

2

1

3/4-10 UNC THRU

$\varnothing .010$ A

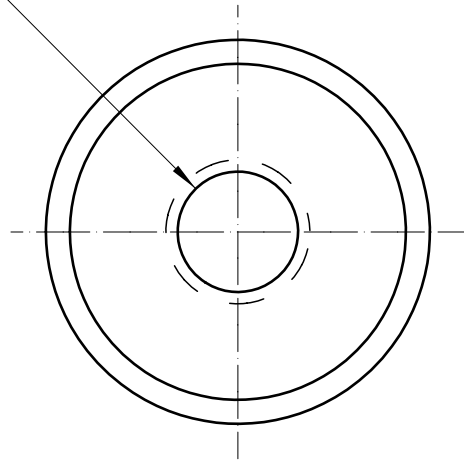

$\varnothing 2.000^{+.000}_{-.002}$
 $\varnothing 50.8^{0}_{-.05}$

2.00
50.80
1.50
38.10

$\varnothing 1.00$
25.40

$\varnothing .010$ A

A

C 12.5
3.18

Document Control Center

NOTES, UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES SHOWN IN TITLE BLOCK ARE IN INCHES.

(UNIQUE ID NO.:AL-0008-9746)

					MAT 2: ,		NOTES:			
					MAT 1: , ROD, 20D, ASTM-A36 STL		NOTES:			
					UNLESS OTHERWISE SPECIFIED		PROJECT NAME:		ERNEST ORLANDO LAWRENCE	
					TOLERANCES		PROJECT NUMBER:		BERKELEY NATIONAL LABORATORY	
					.X±.1 .XX±.015 .XXX±.010				UNIVERSITY OF CALIFORNIA	
					FRACTIONS: ± ---				ALS - INSERTION DEVICE BEAMLINES	
					ANGLES: ± 3°				BL 6.0 FRONT END	
					MACH. SURFS.: 125✓ OR BETTER				STRUT BOSS VERTICAL	
					REF: ASME Y14.5M-1994, THREADS ARE CLASS 2		DO NOT SCALE PRINT		CATEGORY CODE:	
					BREAK EDGES .016 MAX. ON MACHINED WORK		SCALE: 1 : 1		AL 4160	
					REMOVE BURRS, WELD SPLATTER & LOOSE SCALE		THIRD ANGLE PROJECTION		SHEET 1 OF 1	
A rawlins plate 07-26-20 INITIAL REVISION									SIZE: B	
REV AUTHOR APPROVER DATE CHANGE DESCRIPTION									DWG NO: 26B573	
									REV A	

3

2