


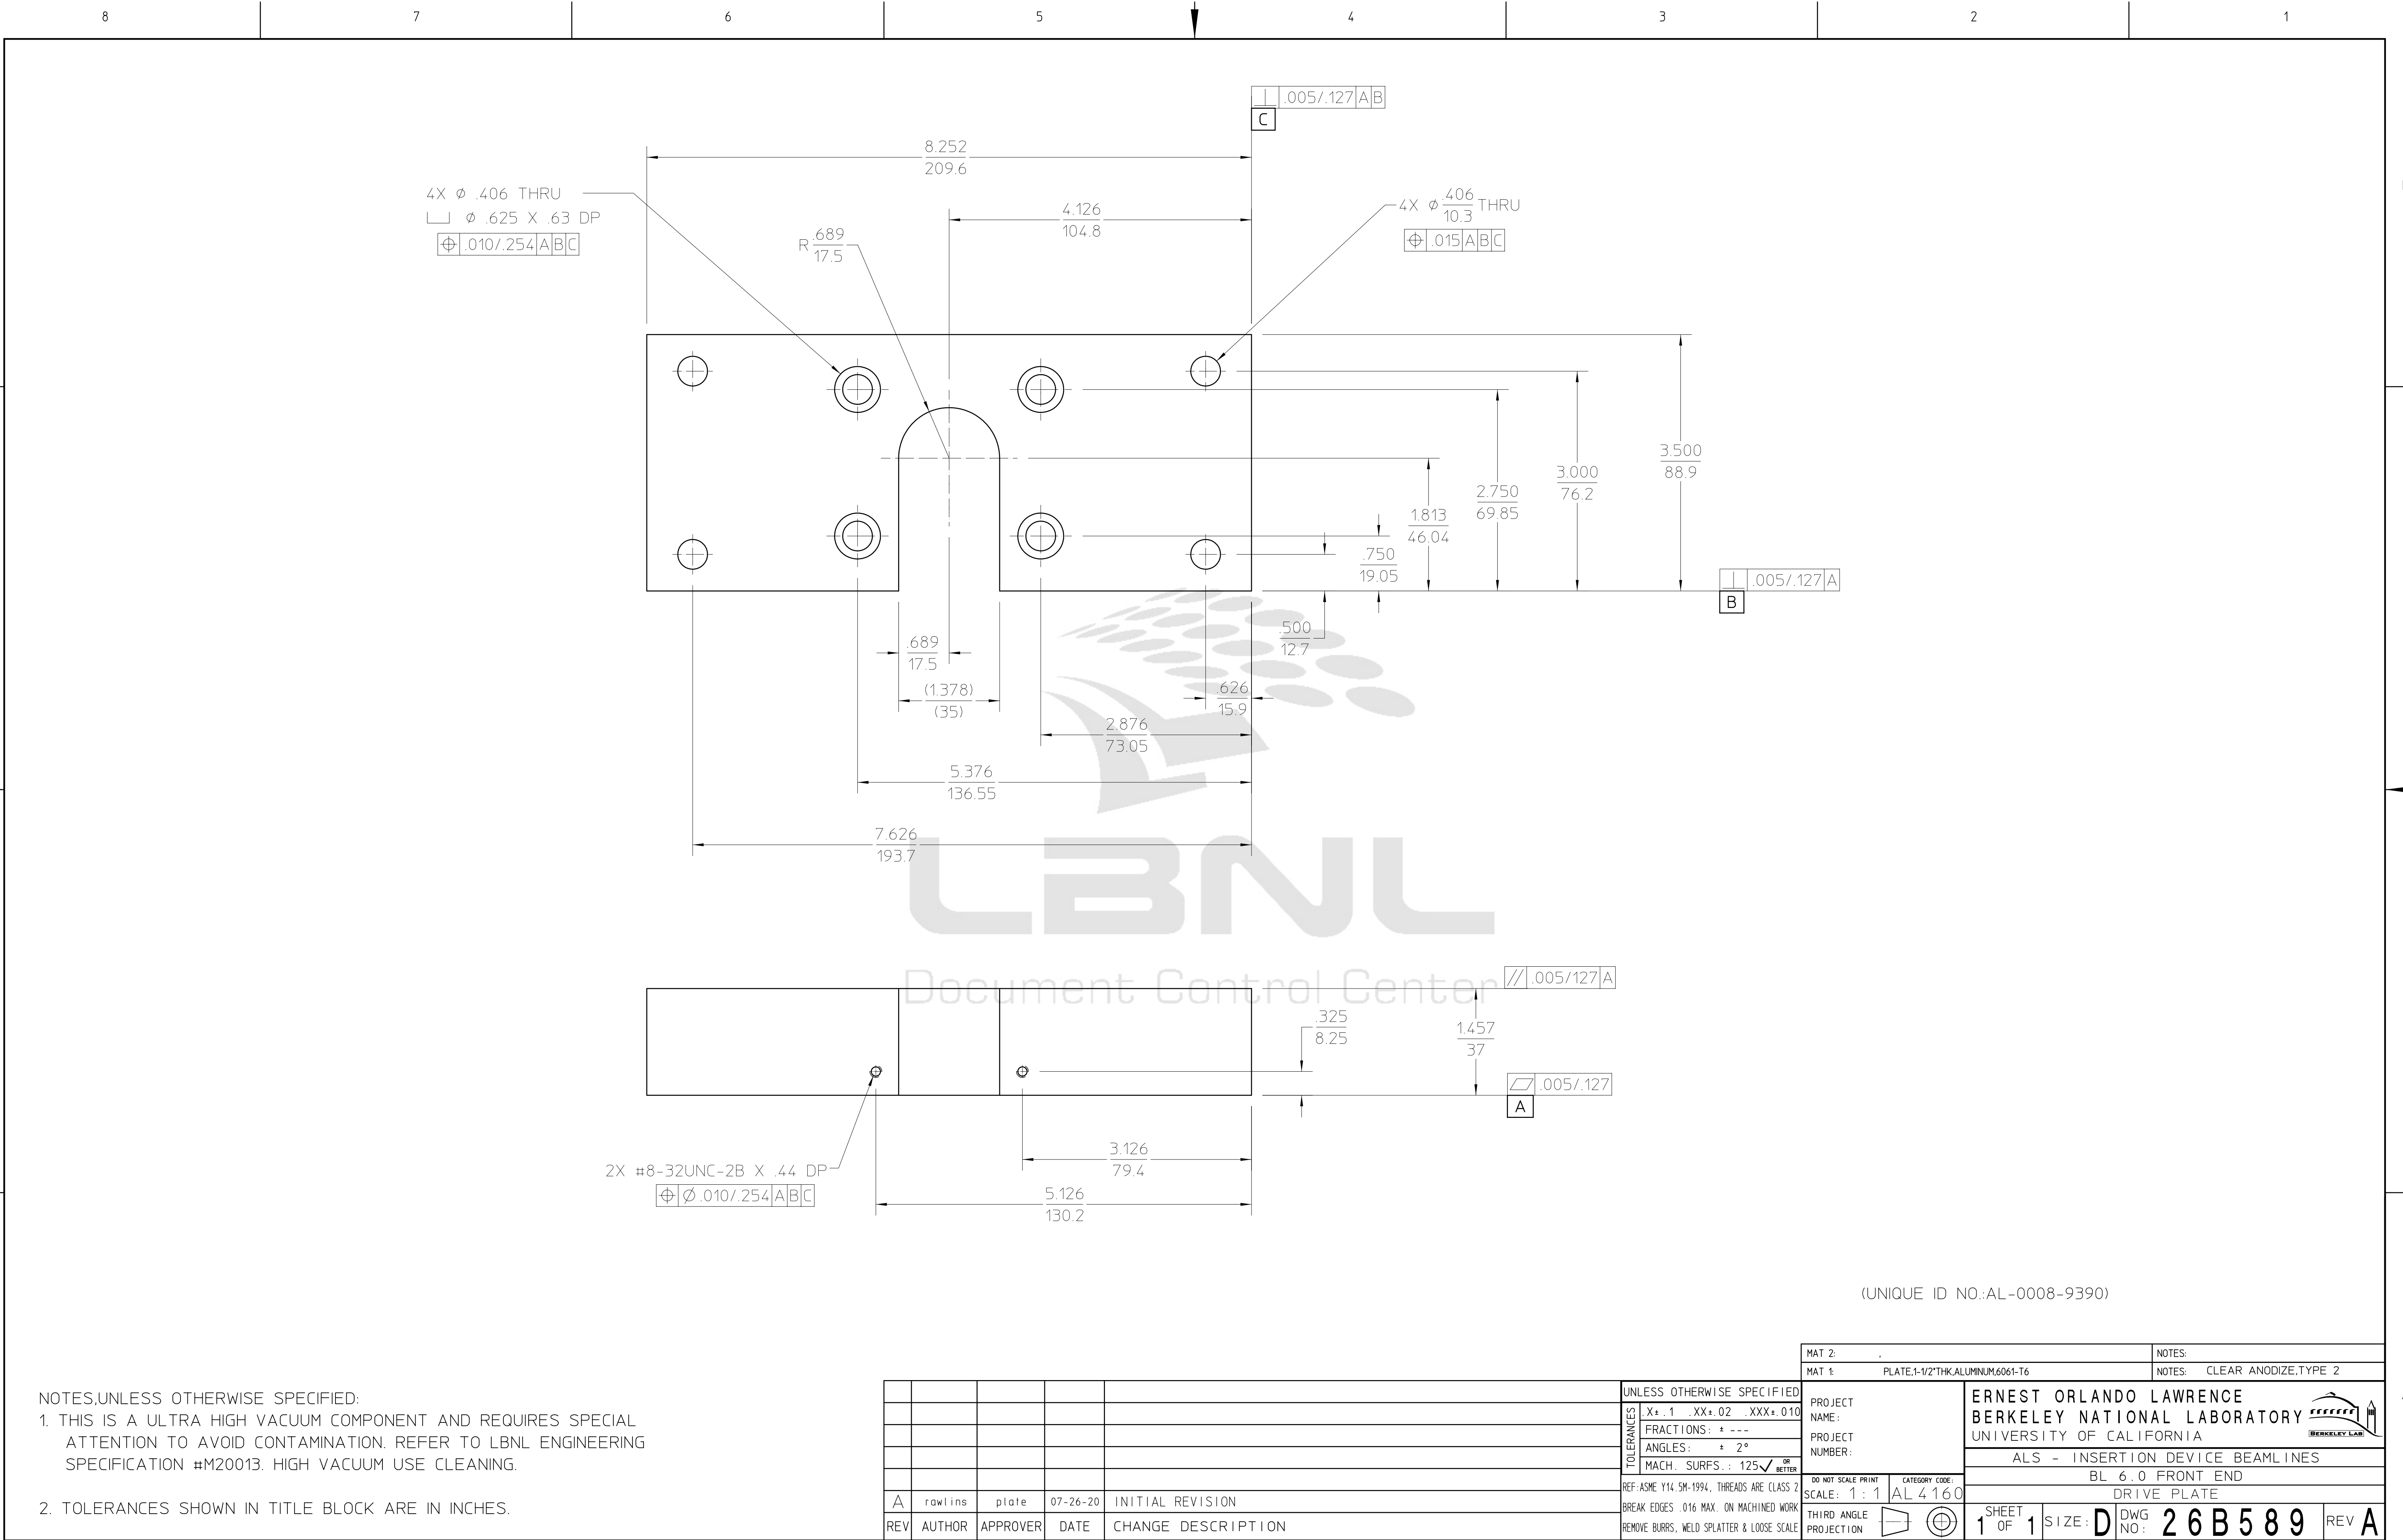

NOTES, UNLESS OTHERWISE SPECIFIED:
1. THIS IS A ULTRA HIGH VACUUM COMPONENT AND REQUIRES SPECIAL ATTENTION TO AVOID CONTAMINATION. REFER TO LBNL ENGINEERING SPECIFICATION #M20013. HIGH VACUUM USE CLEANING.
2. TOLERANCES SHOWN IN TITLE BLOCK ARE IN INCHES.

					UNLESS OTHERWISE SPECIFIED
					X ± .1 XX ± .02 XXX ± .010
					FRACTIONS: * - - -
					ANGLES: * 2°
					MACH. SURFS.: 125 ✓ OR BETTER
					REF: ASME Y14.5M-1994, THREADS ARE CLASS 2
					BREAK EDGES .016 MAX. ON MACHINED WORK
					REMOVE BURRS, WELD SPLATTER & LOOSE SCALE
A	rawlins	plate	07-26-20	INITIAL REVISION	
REV	AUTHOR	APPROVER	DATE	CHANGE DESCRIPTION	

MAT 2:		NOTES:	
MAT 1:	PLATE, 1-1/2" THK, ALUMINUM 6061-T6	NOTES:	CLEAR ANODIZE, TYPE 2
PROJECT NAME:	ERNEST ORLANDO LAWRENCE BERKELEY NATIONAL LABORATORY UNIVERSITY OF CALIFORNIA		
PROJECT NUMBER:	ALS - INSERTION DEVICE BEAMLINES		
DO NOT SCALE PRINT	CATEGORY CODE:	BL 6.0 FRONT END	
SCALE: 1:1	AL 4160	DRIVE PLATE	
THIRD ANGLE PROJECTION		SHEET 1 OF 1	SIZE: D
		DWG NO: 26B589	REV A