

Officially Released to the LBNL Document Control Center
Released: July 26th, 2004 DCC Auth Key: QW810ZWXVQ

4

3

2

1

D

C

B


A

D

C

B

A

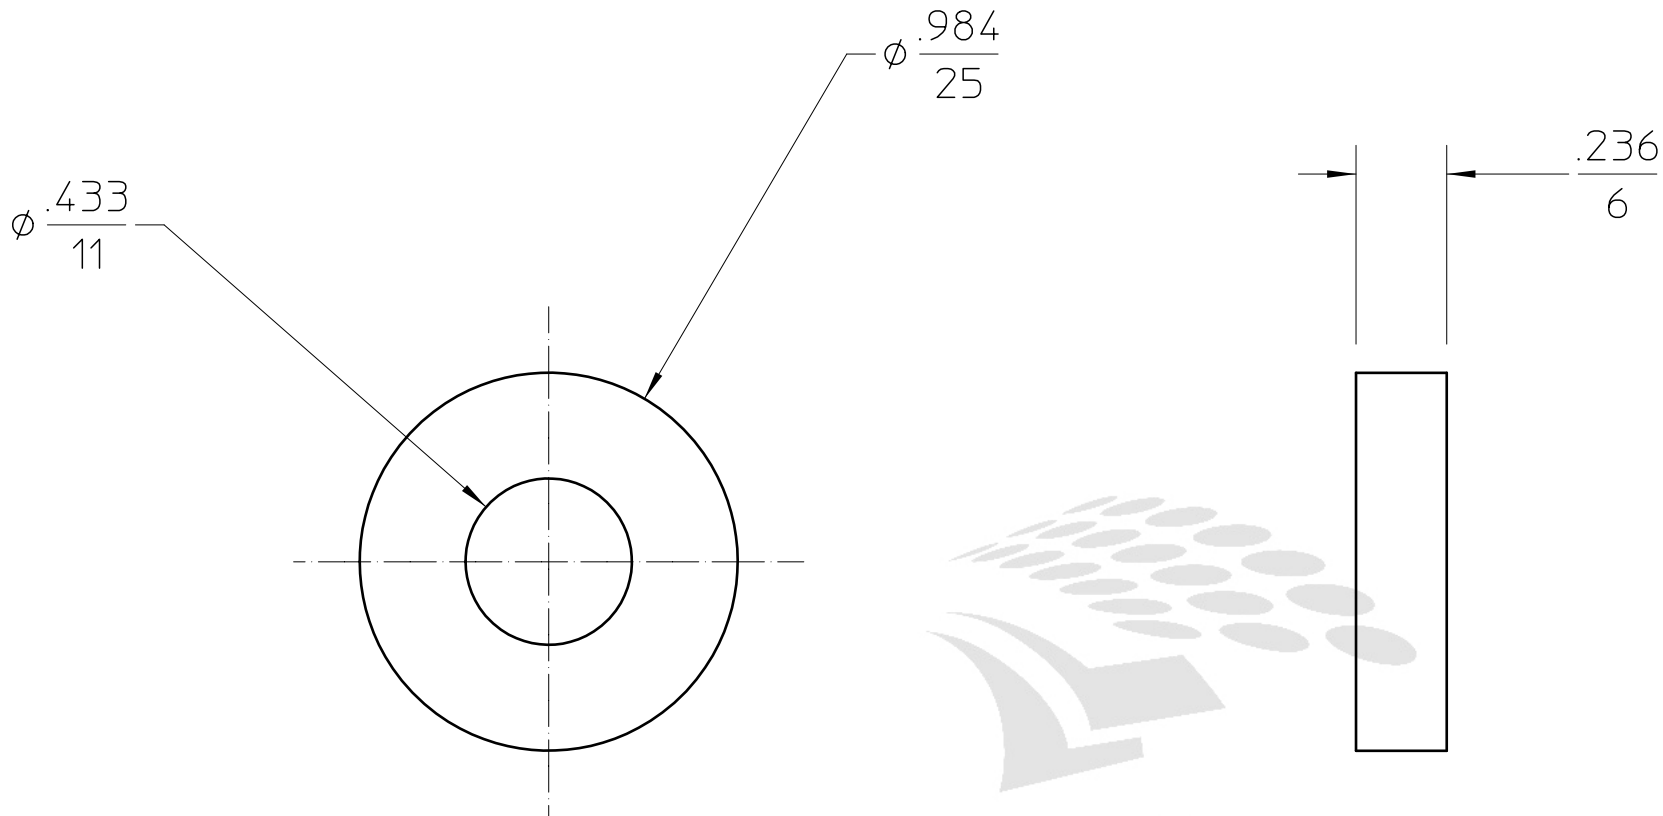

NOTES, UNLESS OTHERWISE SPECIFIED:

1. THIS IS A ULTRA HIGH VACUUM COMPONENT AND REQUIRES SPECIAL ATTENTION TO AVOID CONTAMINATION. REFER TO LBNL ENGINEERING SPECIFICATION #M20013. HIGH VACUUM USE CLEANING.

(UNIQUE ID NO.:AL-0008-9550)

2. TOLERANCES SHOWN IN TITLE BLOCK ARE IN INCHES.

REV	AUTHOR	APPROVER	DATE	CHANGE DESCRIPTION
A	rawlins	plate	07-26-20	INITIAL REVISION

UNLESS OTHERWISE SPECIFIED		PROJECT NAME:		ERNEST ORLANDO LAWRENCE BERKELEY NATIONAL LABORATORY UNIVERSITY OF CALIFORNIA	
TOLERANCES	.X±.06 .XX±.02 .XXX±.010		ALS - INSERTION DEVICE BEAMLINES		
	FRACTIONS: ± 1/64		BL 6.0 FRONT END		
	ANGLES: ± 1°		SHORT SPACER		
	MACH. SURFS.: 125✓ OR BETTER		SHEET 1 OF 1 SIZE: B DWG NO: 26B593 REV A		
REF: ASME Y14.5M-1994, THREADS ARE CLASS 2		DO NOT SCALE PRINT		CATEGORY CODE:	
BREAK EDGES .016 MAX. ON MACHINED WORK		SCALE: 2 : 1 AL 4160			
REMOVE BURRS, WELD SPLATTER & LOOSE SCALE		THIRD ANGLE PROJECTION			

3

2