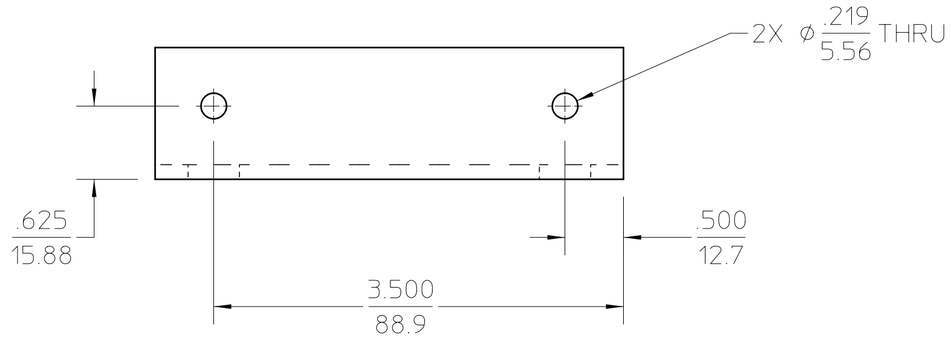

NOTES,UNLESS OTHERWISE SPECIFIED:
1. THIS IS A ULTRA HIGH VACUUM COMPONENT AND REQUIRES SPECIAL ATTENTION TO AVOID CONTAMINATION. REFER TO LBNL ENGINEERING SPECIFICATION #M20013. HIGH VACUUM USE CLEANING.
2. TOLERANCES SHOWN IN TITLE BLOCK ARE IN INCHES.

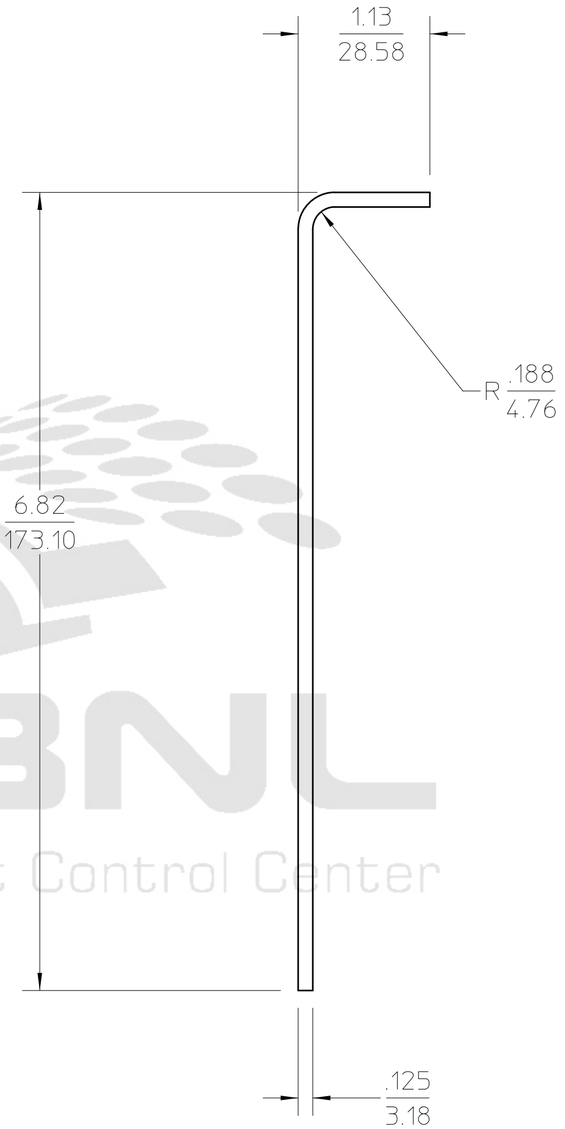

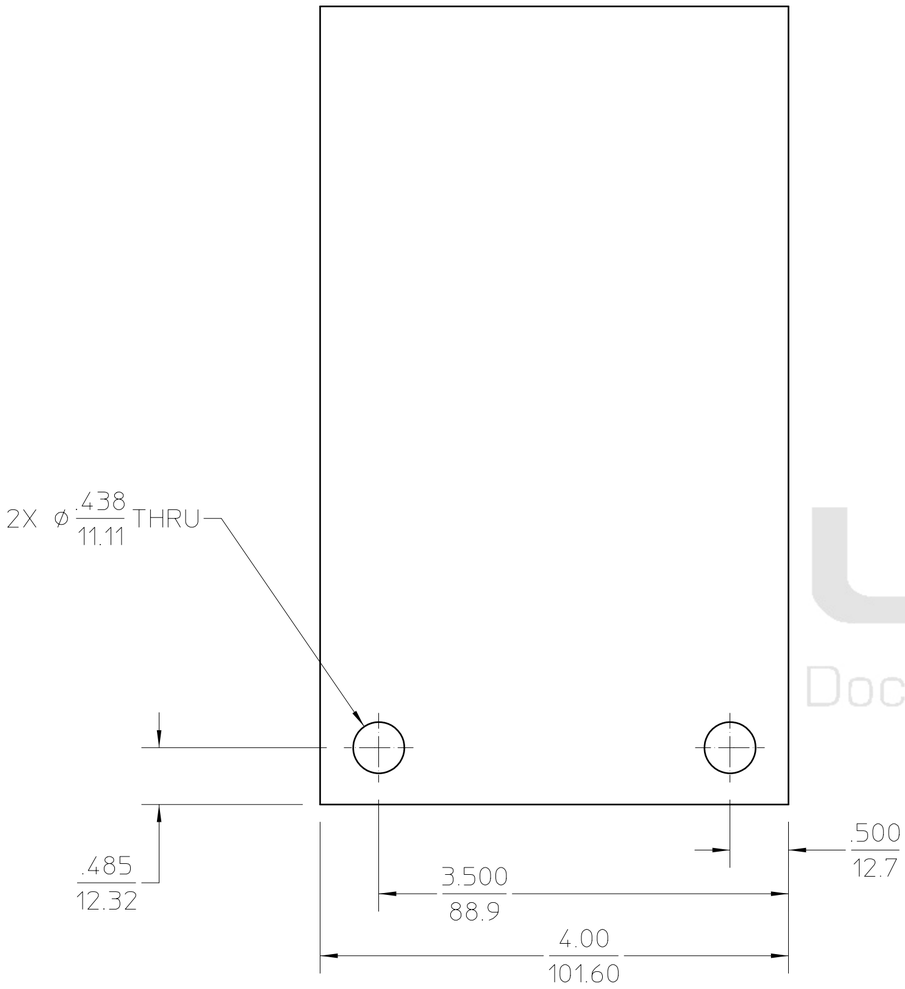

(UNIQUE ID NO.:AL-0008-9412)

REV	AUTHOR	APPROVER	DATE	CHANGE DESCRIPTION
A	rawlins	plate	07-26-20	INITIAL REVISION

UNLESS OTHERWISE SPECIFIED
TOLERANCES: .X± .- .XX±.02 .XXX±.010
FRACTIONS: ± 1/64
ANGLES: ± 2°
MACH. SURFS.: 125 ✓ OR BETTER
REF:ASME Y14.5M-1994, THREADS ARE CLASS 2
BREAK EDGES .016 MAX. ON MACHINED WORK
REMOVE BURRS, WELD SPLATTER & LOOSE SCALE

MAT 2: , NOTES:
MAT 1: SHEET,.125"THK ALUMINUM,6061-T6 NOTES:

PROJECT NAME:
PROJECT NUMBER:
DO NOT SCALE PRINT SCALE: 1 : 1
CATEGORY CODE: AL 4160
THIRD ANGLE PROJECTION

ERNEST ORLANDO LAWRENCE
BERKELEY NATIONAL LABORATORY
UNIVERSITY OF CALIFORNIA
ALS - INSERTION DEVICE BEAMLINES
BL 6.0 FRONT END
SOLENOID SUPPORT SIDE
SHEET 1 OF 1 SIZE: C DWG NO: 26B597 REV A