

Officially Released to the LBNL Document Control Center
Released: December 19th, 2003 DCC Auth Key: 04K7FQXKD5

D

C


B

D

C

B

A

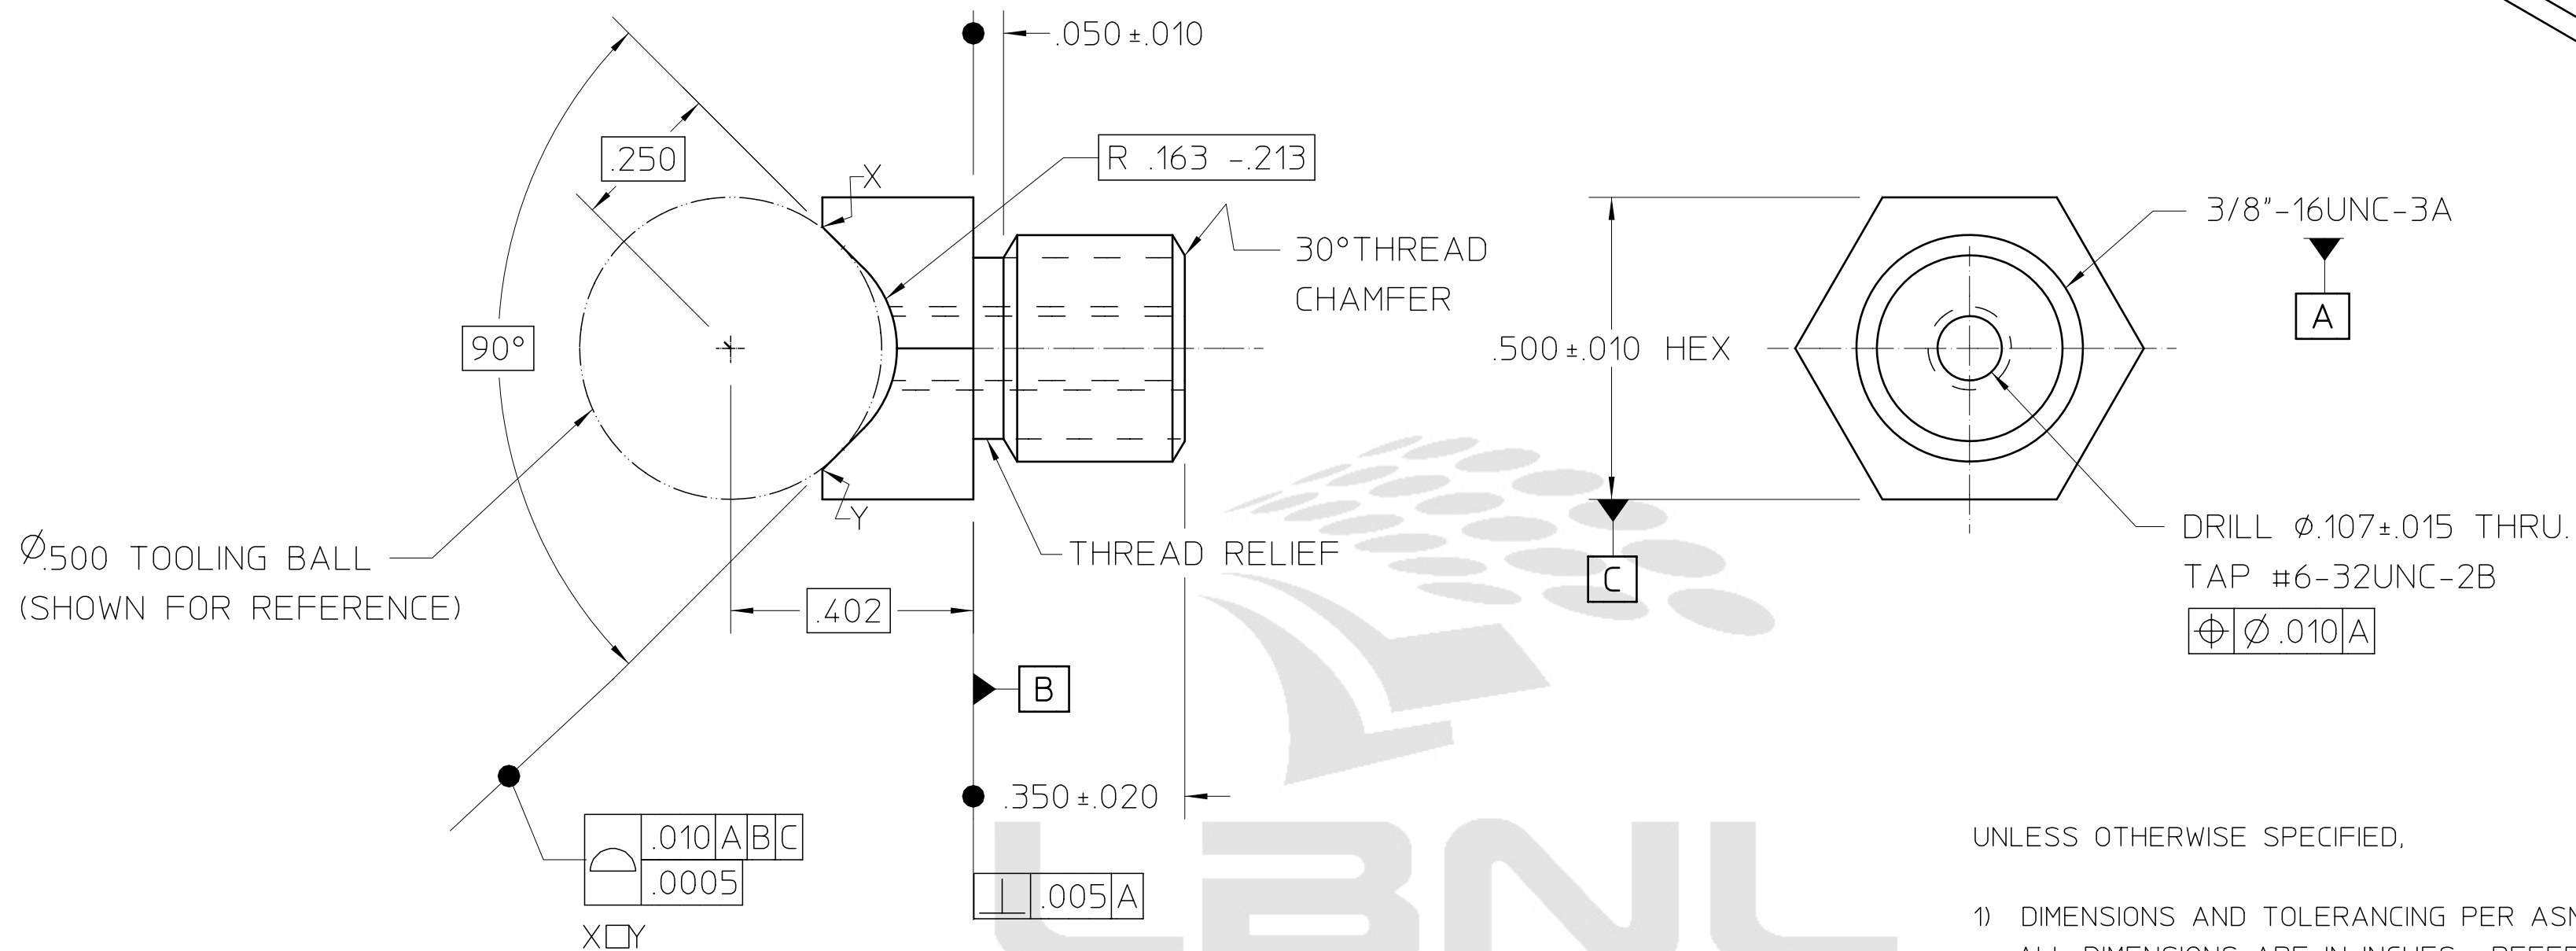

- UNLESS OTHERWISE SPECIFIED,
- 1) DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994. ALL DIMENSIONS ARE IN INCHES. REFERENCE DIMENSIONS ARE SHOWN IN PARENTHESES. NOT ALL HIDDEN LINES ARE SHOWN.
 - 2) THIS IS AN ULTRA HIGH VACUUM (UHV) PART AND REQUIRES SPECIAL ATTENTION TO AVOID UHV CONTAMINATION. READ LBNL SPECIFICATION M773 BEFORE PERFORMING ANY FAB- RICATION.
 - 3) PROTECT FINISHED PART BY BAGGING OR SIMILAR METHOD TO PROTECT AND MAINTAIN CLEANLINESS DURING SHIPMENT AND STORAGE. TAKE EXTREME CARE NOT TO DING, SCRATCH, DENT, OR OTHERWISE MARK ANY MACHINED SURFACE.

A	knolls	patton	12-19-20	INITIAL REVISION
REV	AUTHOR	APPROVER	DATE	CHANGE DESCRIPTION

UNLESS OTHERWISE SPECIFIED		PROJECT NAME:		ERNEST ORLANDO LAWRENCE	
TOLERANCES	.X ± .- .XX ± .- .XXX ±	Advanced Light Source	UNIQUE NUMBER: AL-0002-7135	BERKELEY NATIONAL LABORATORY	
FRACTIONS:	± - / - -			UNIVERSITY OF CALIFORNIA	
ANGLES:	± 0.5 / INCH			ALS - INSERTION DEVICE BEAMLINES	
MACH. SURFS.:	63 ✓ OR BETTER	DO NOT SCALE PRINT	CATEGORY CODE:	BL 11.0.1 MONOCHROMATOR	
REF: ASME Y14.5M-1994, THREADS ARE CLASS 2		SCALE: 4 : 1	AL 4 153	OPTIC V-MOUNT FOOT	
BREAK EDGES .016 MAX. ON MACHINED WORK		THIRD ANGLE PROJECTION		SHEET 1 OF 1	SIZE: C
REMOVE BURRS, WELD SPLATTER & LOOSE SCALE				DWG NO: 26A978	REV A