
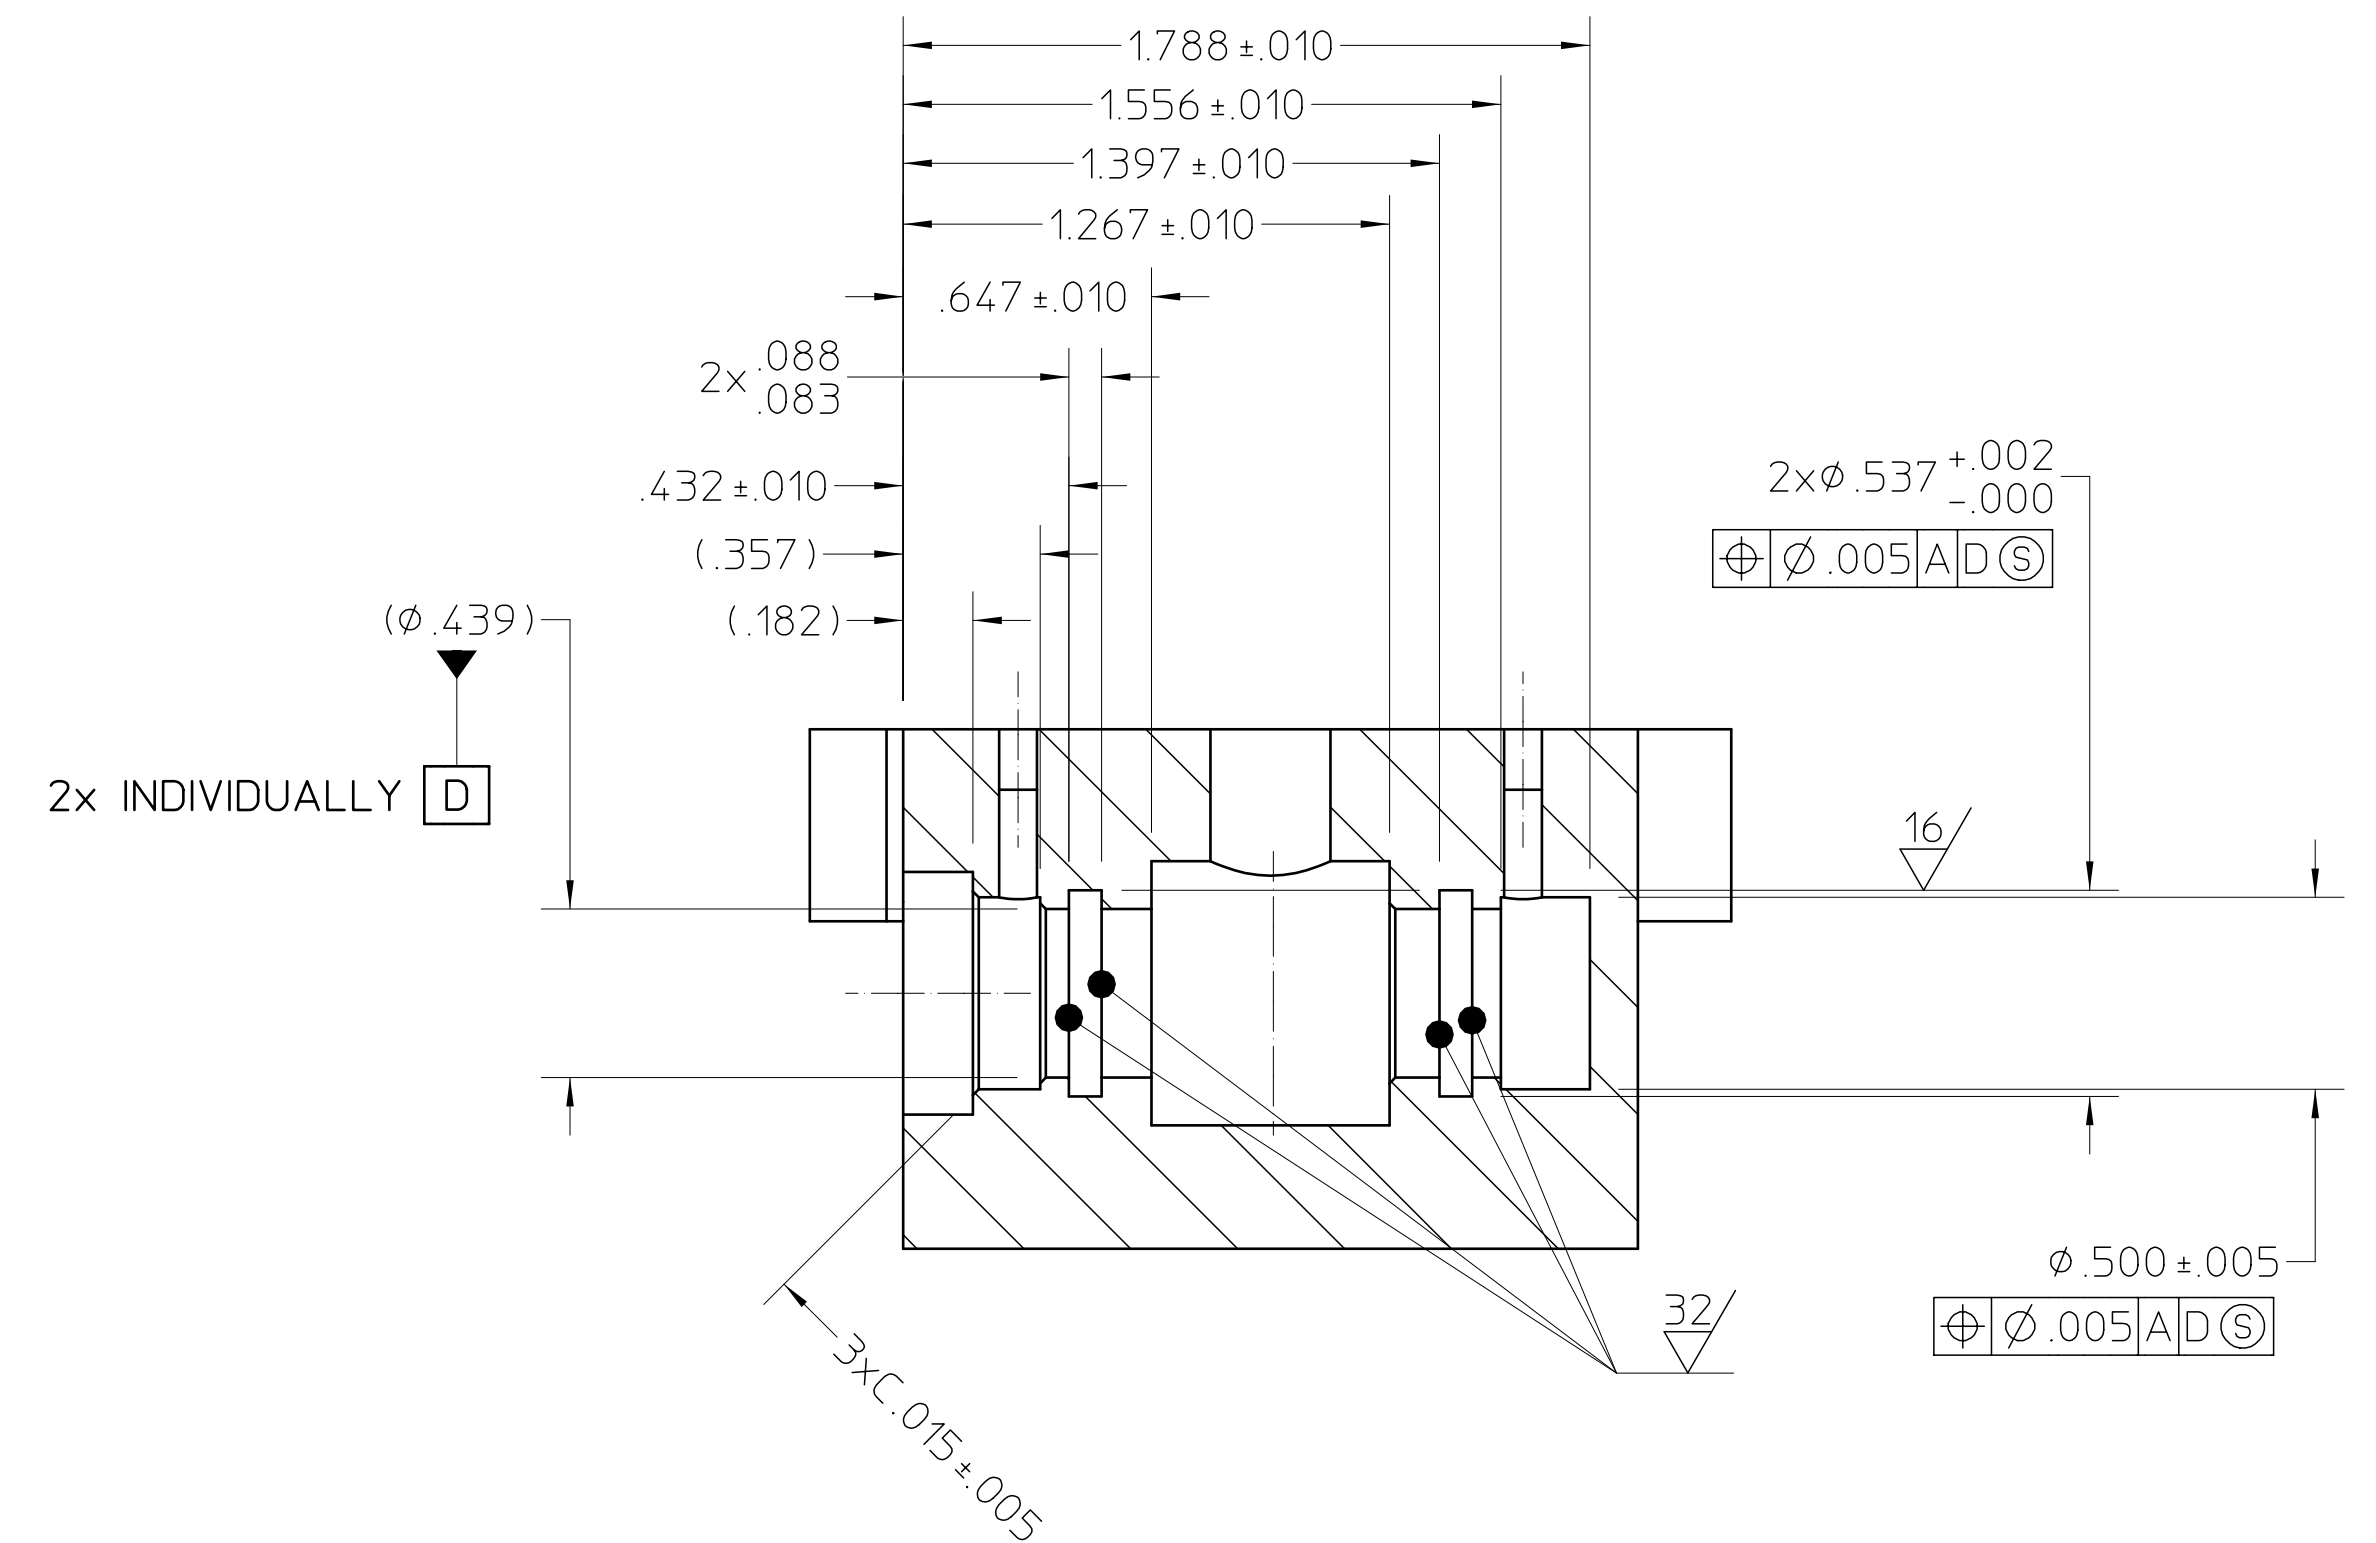
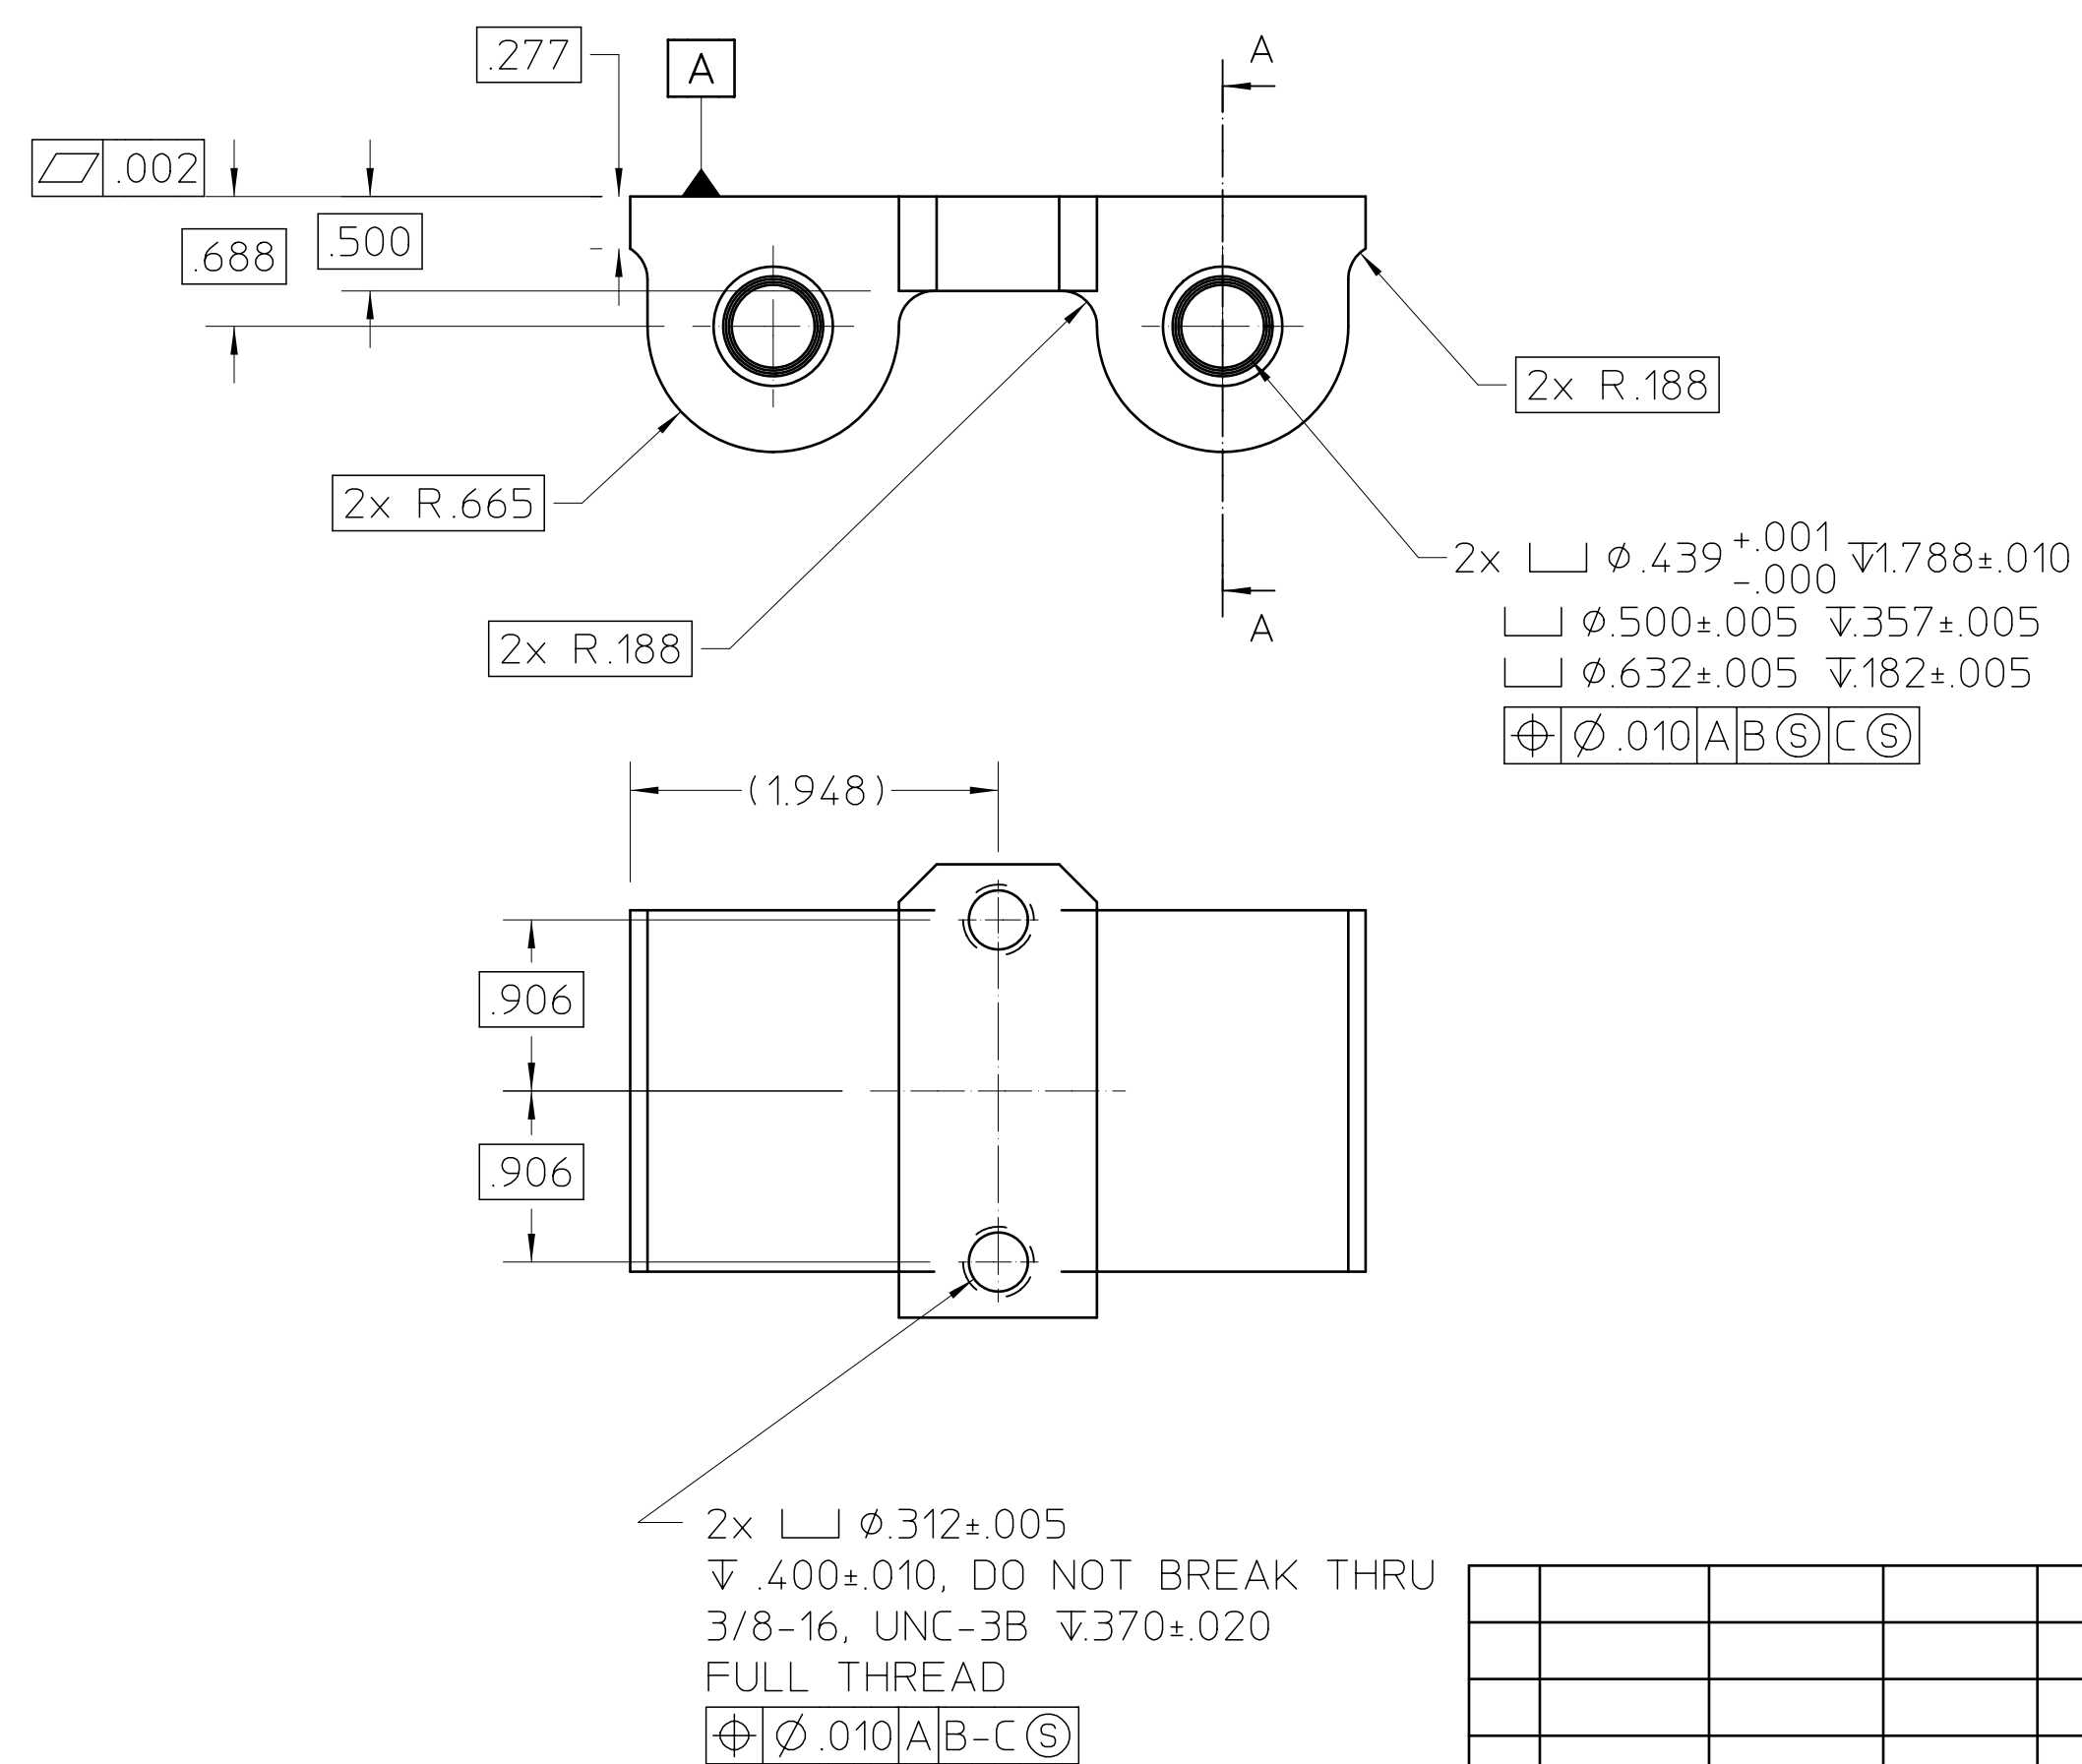


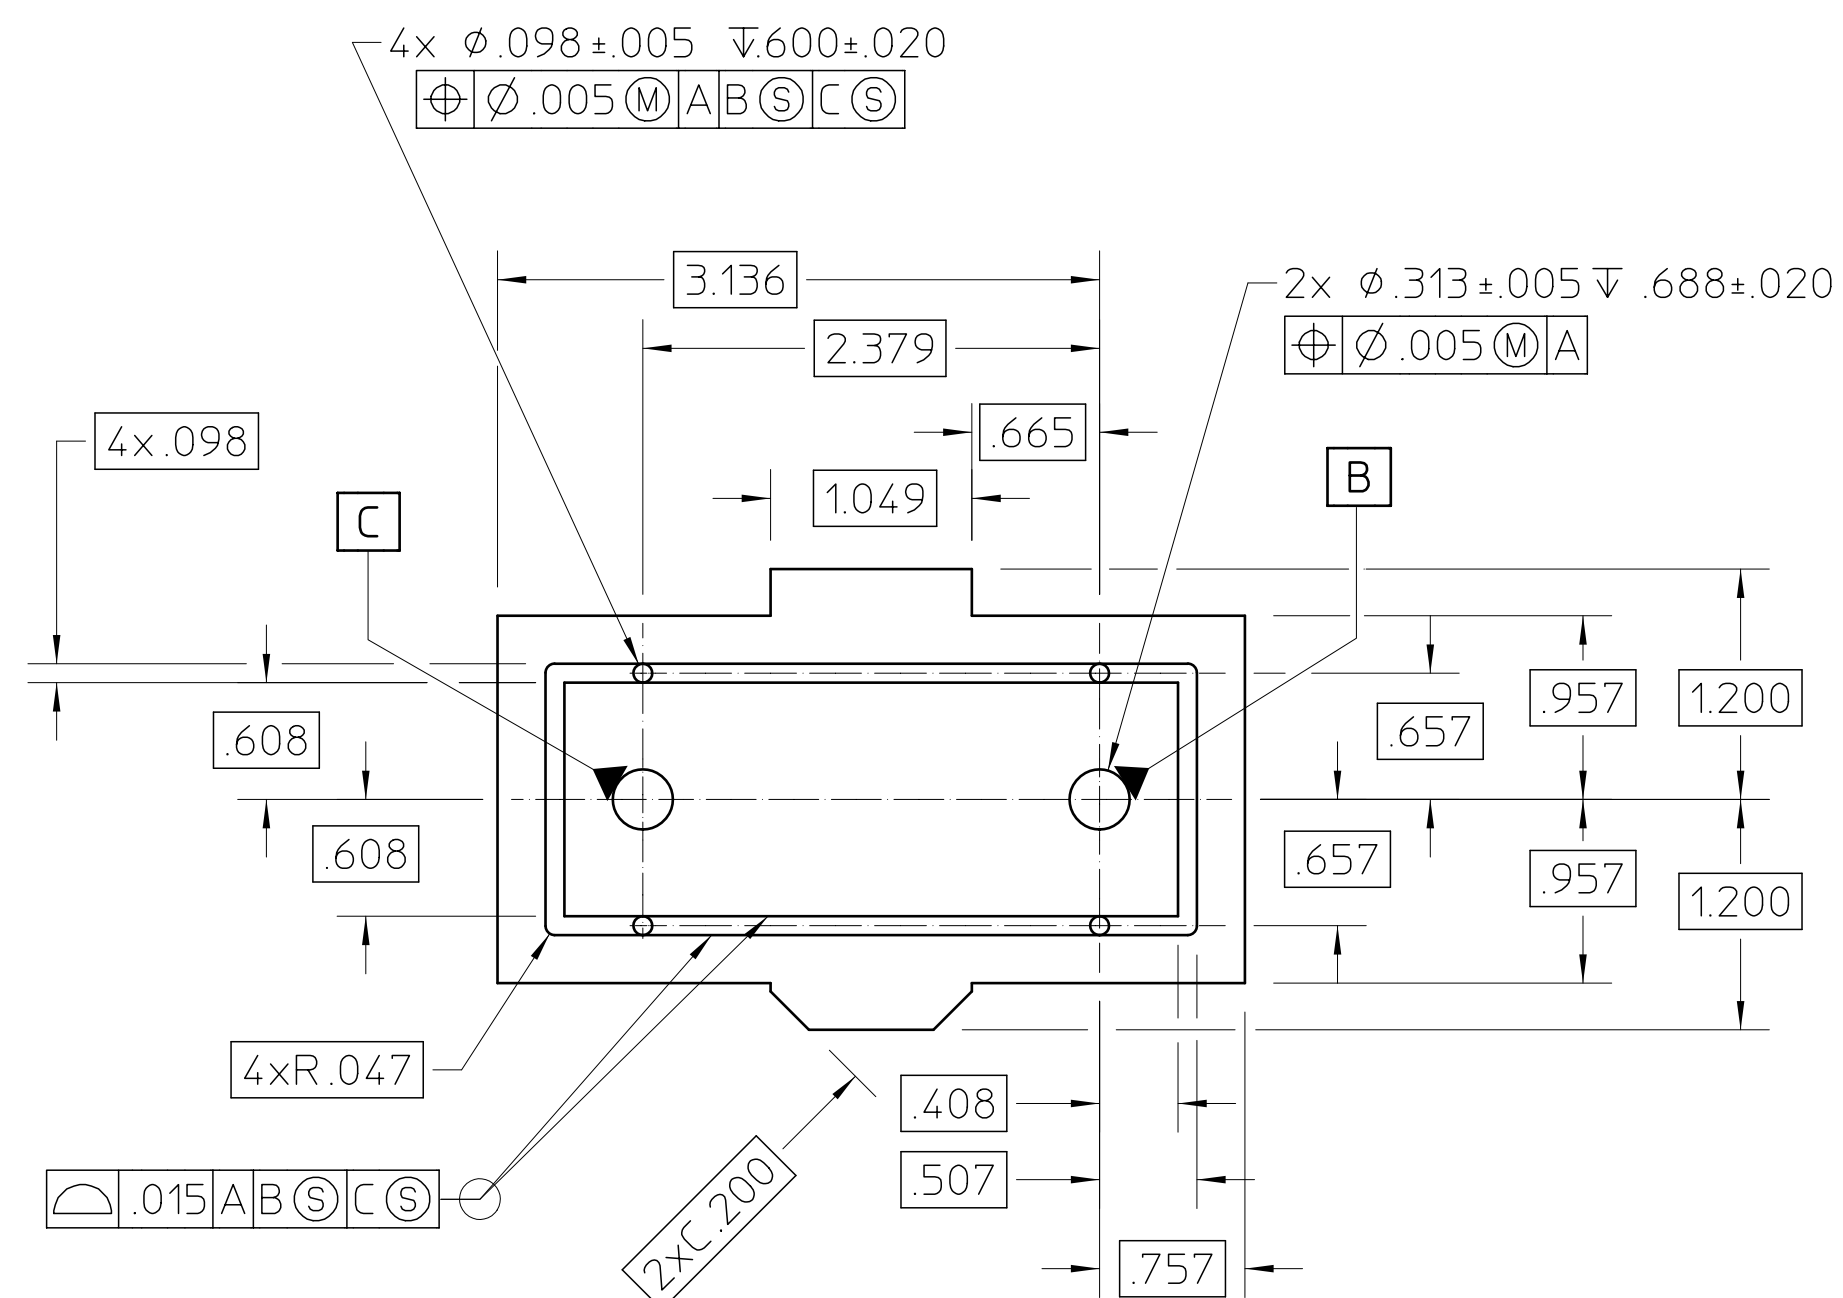


SECTION A-A
SCALE 2:1
2 PLACES

NOTES; UNLESS OTHERWISE SPECIFIED

1. DIMENSIONING & TOLERANCING PER ASME Y14.5M - 1994. ALL DIMENSIONS ARE IN INCHES. REFERENCE DIMENSIONS ARE SHOWN IN PARENTHESES. NOT ALL HIDDEN LINES ARE SHOWN.
2. SURFACE TREATMENT; THIS IS A UHV PART, CLEAN AND HANDLE PER LBL SPECIFICATION 3M775B.

A	patton	patton	06-30-20	INITIAL REVISION
REV	AUTHOR	APPROVER	DATE	CHANGE DESCRIPTION

		REOD	ITEM	PART NO.	DESCRIPTION
TOLERANCES	UNLESS OTHERWISE SPECIFIED		ERNEST ORLANDO LAWRENCE BERKELEY NATIONAL LABORATORY UNIVERSITY OF CALIFORNIA 		
	X±. -- .XX±. -- .XXX±. --		ALS - INSERTION DEVICE BEAMLINES		
	FRACTIONS: ± - / - -		BL 6.0.1.2 BRANCHLINE		
	ANGLES: ± -- ° / INCH MACH. SURFS.: 125 ✓ OR BETTER		PREMIRROR COOLING RECIEVER BLOCK		
REF: ASME Y14.5M-1994, THREADS ARE CLASS 2		DO NOT SCALE PRINT	CATEGORY CODE:		
BREAK EDGES .016 MAX. ON MACHINED WORK		SCALE: 1:1	AL 4 165		
REMOVE BURRS, WELD SPLATTER & LOOSE SCALE		THIRD ANGLE PROJECTION		SHEET 1 OF 1 SIZE: D DWG NO: 26B327	REV A