


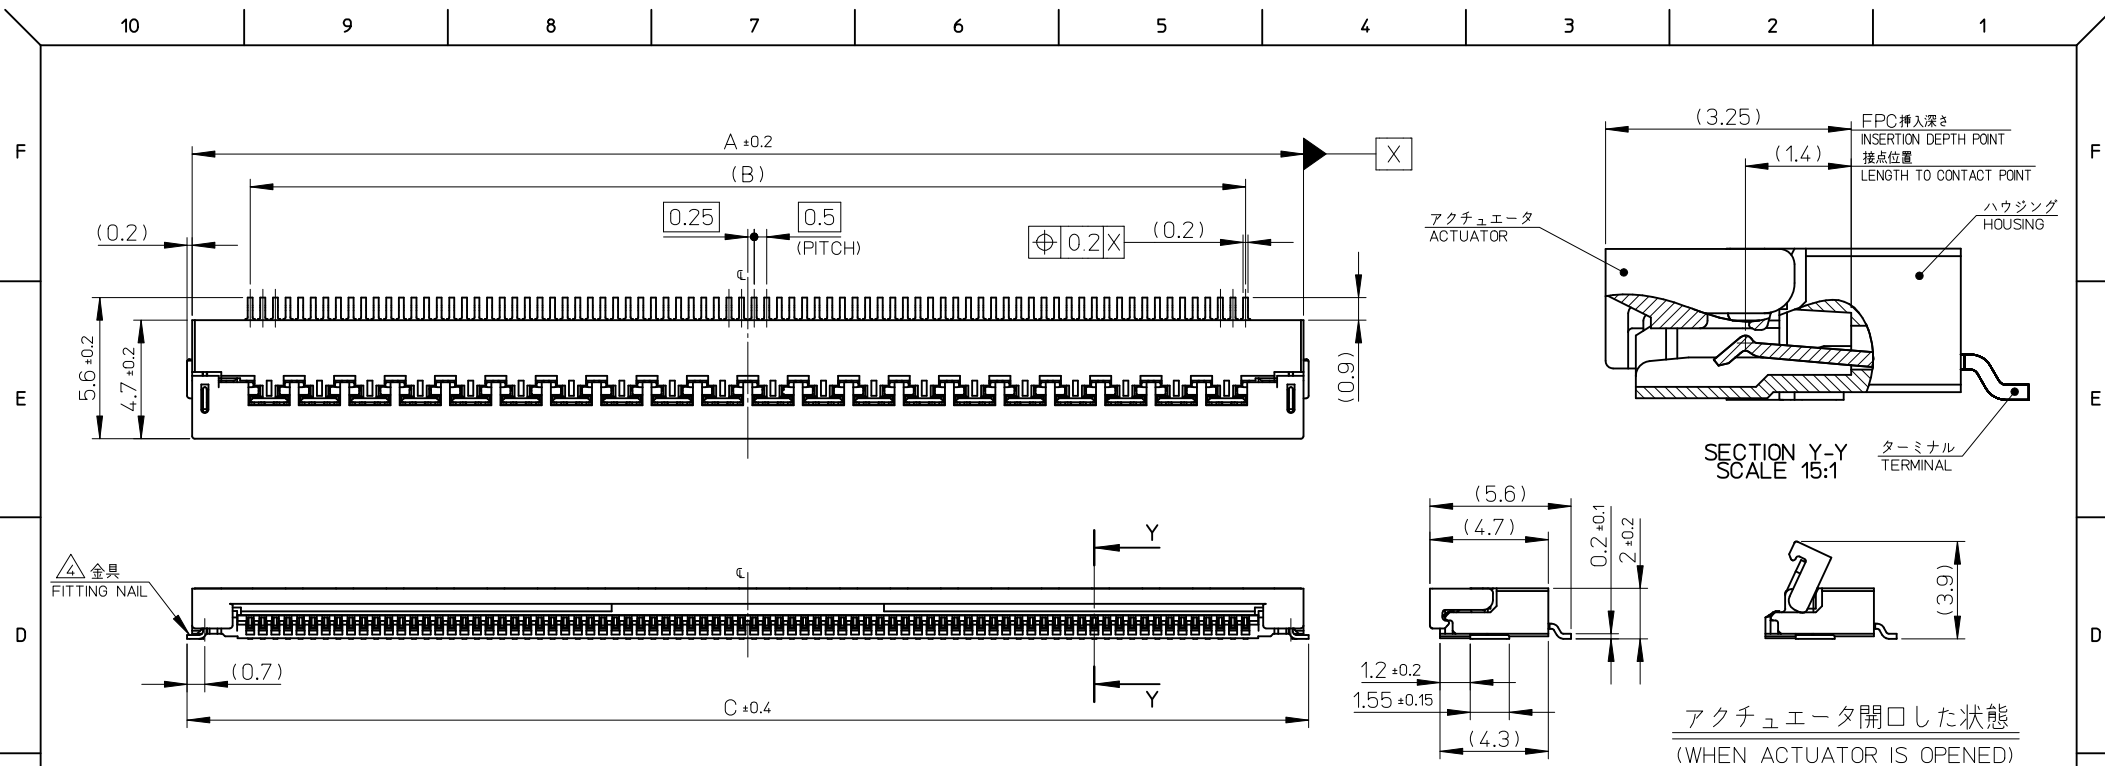

注記 NOTES

1. 使用材料 MATERIAL

ハウジング HOUSING	: 液晶ポリマー ガラス充填, UL94-V0(黒) LIQUID CRYSTAL POLYMER GLASS FILLED, UL94V-0(BLACK)
アクチュエータ ACTUATOR	: PPS ガラス充填, UL94-V0(黒) PPS GLASS FILLED, UL94V-0(BLACK)
ターミナル TERMINAL	: リン青銅(t=0.203) PHOSPHOR BRONZE
金具 FITTING NAIL	: リン青銅(t=0.152) PHOSPHOR BRONZE

2. めっき仕様 PLATING

ターミナル TERMINAL	ニッケル下地金めっき GOLD(Au) OVER NICKEL(Ni) PLATING.
金具 FITTING NAIL	鍍めっき TIN(Sn) PLATING.


3. エンボステープ梱包時は、アクチュエータが閉じた状態とする。 IN THE PACKAGE, ACTUATOR OF PART 503366-**11 SHOULD BE CLOSED.

△ パターン剥離止め用金具
FITTING NAIL FOR PREVENTION OF
PEELING OF P.C.B. PATTERN.

- △ R0.3は、FPC導体部にかからないこと。
R0.3 MUST NOT BE OVERLAPPED
TO PATTERN OF FPC.
6. N: 極数 N: CIRCUIT.
7. ELV及びRoHS適合品
ELV AND RoHS COMPLIANT

44.5	39.5	44.1	503366-8011	80
34.5	29.5	34.1	503366-6011	60
C	B	A	EMBOSSD TAPE ORDER No. オーダー番号	CIRCUIT
CONNECTOR SERIES No. : 503366-**19				

REVISED EC NO: J2010-2127 DRWN:YKOBAYASHI 02 2010/04/22 CHKD:NMATSUURA 2010/04/23 APPR:KMORIKAWA 2010/04/25 A	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± ---	YKOBAYASHI 02	DATE 2010/01/05	TITLE 0.5FPC E/O H=2 GANG ASSY TYPE HOUSING ASSY				
		10 OVER 30 UNDER	± ---	NMATSUURA	2010/01/05					
		30 OVER	± ---	APPROVED BY KMORIKAWA	DATE 2010/01/05	MOLEX INCORPORATED				
		ANGULAR ±1 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-503366-001		1 OF 2			
	REV			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

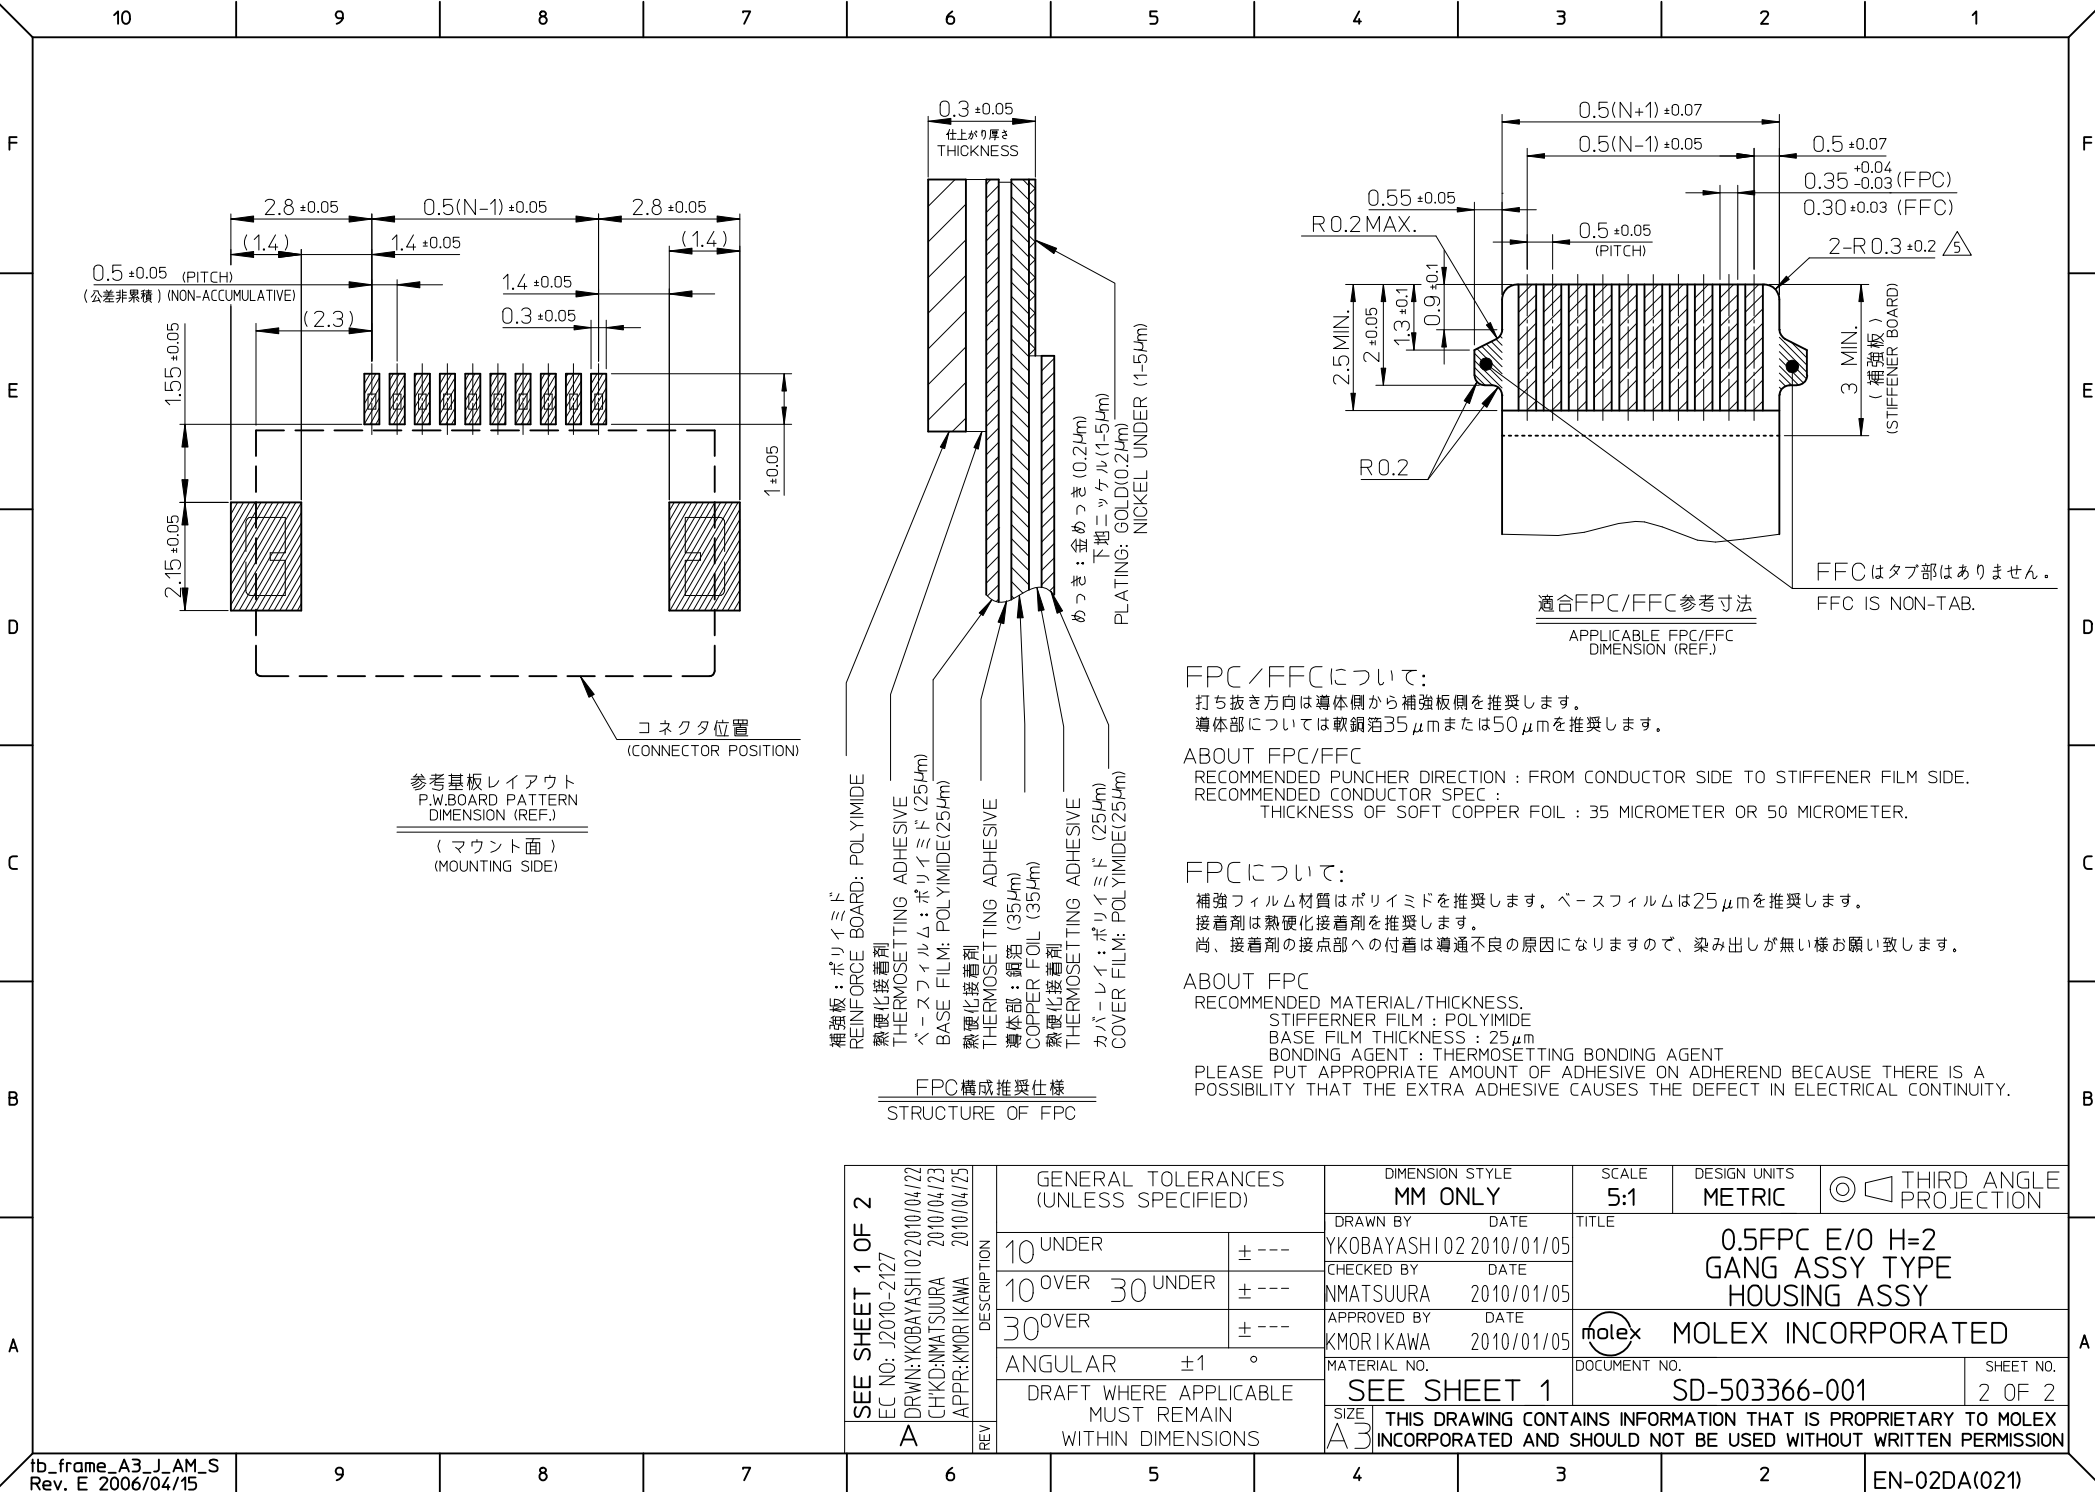

10 9 8 7 6 5 4 3 2 1

F

E

D




C

B

A

引き出し方向


PULL OUT
DIRECTION

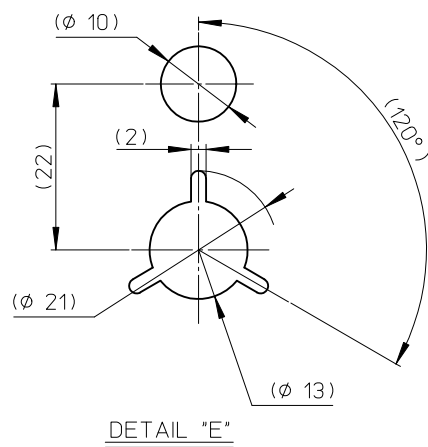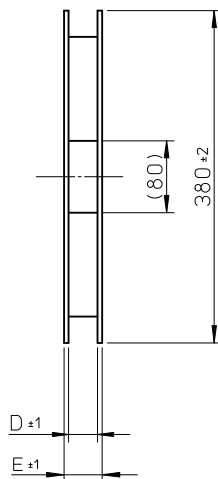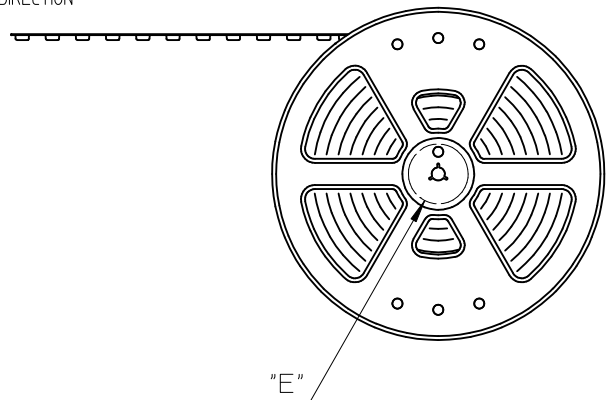

NOTES

1. 梱包数量 : 2000個/リール
NUMBER OF CONNECTORS : 2000PIECES/REEL

2. リードテープ長さ
LEAD TAPE LENGTH

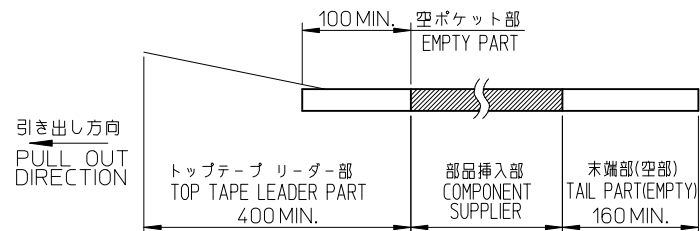

3. 製品詳細寸法については図面 SD-503366-001を参照下さい。
FOR DIMENSIONS OF PRODUCT, REFER TO SD-503366-001.

4. 材料 MATERIAL

キャリアテープ : ポリスチレン

CARRIER TAPE : POLYSTYRENE

トップテープ : ポリエチレンテレフタレート, ポリエチレン

TOP TAPE : POLYETHYLENE TEREPHTHALATE, POLYETHYLENE

リール : ポリスチレン<リサイクル材を含む>

REEL : POLYSTYRENE<RECYCLE MATERIAL CONTAINED>

5. ELV及びRoHS適合品 ELV AND RoHS COMPLIANT

REVISED EC NO: J2010-2127 DRWN: YKOBAYASHI 02 2010/04/22 CHKD: NMATSUURA 2010/04/23 APPR: KMORIKAWA 2010/04/25	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	 THIRD ANGLE PROJECTION	
				MM ONLY		5:1	METRIC		
		10 UNDER	± ---	DRAWN BY	DATE	TITLE 0.5FPC E/O H=2 GANG ASSY TYPE EMBSTP PACKAGE			
		10 OVER 30 UNDER	± ---	CHECKED BY	DATE				
		30 OVER	± ---	APPROVED BY	DATE				
	ANGULAR	±1 °	MATERIAL NO.		DOCUMENT NO.				SHEET NO.
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 2		SD-503366-002			1 OF 2		
A	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

