


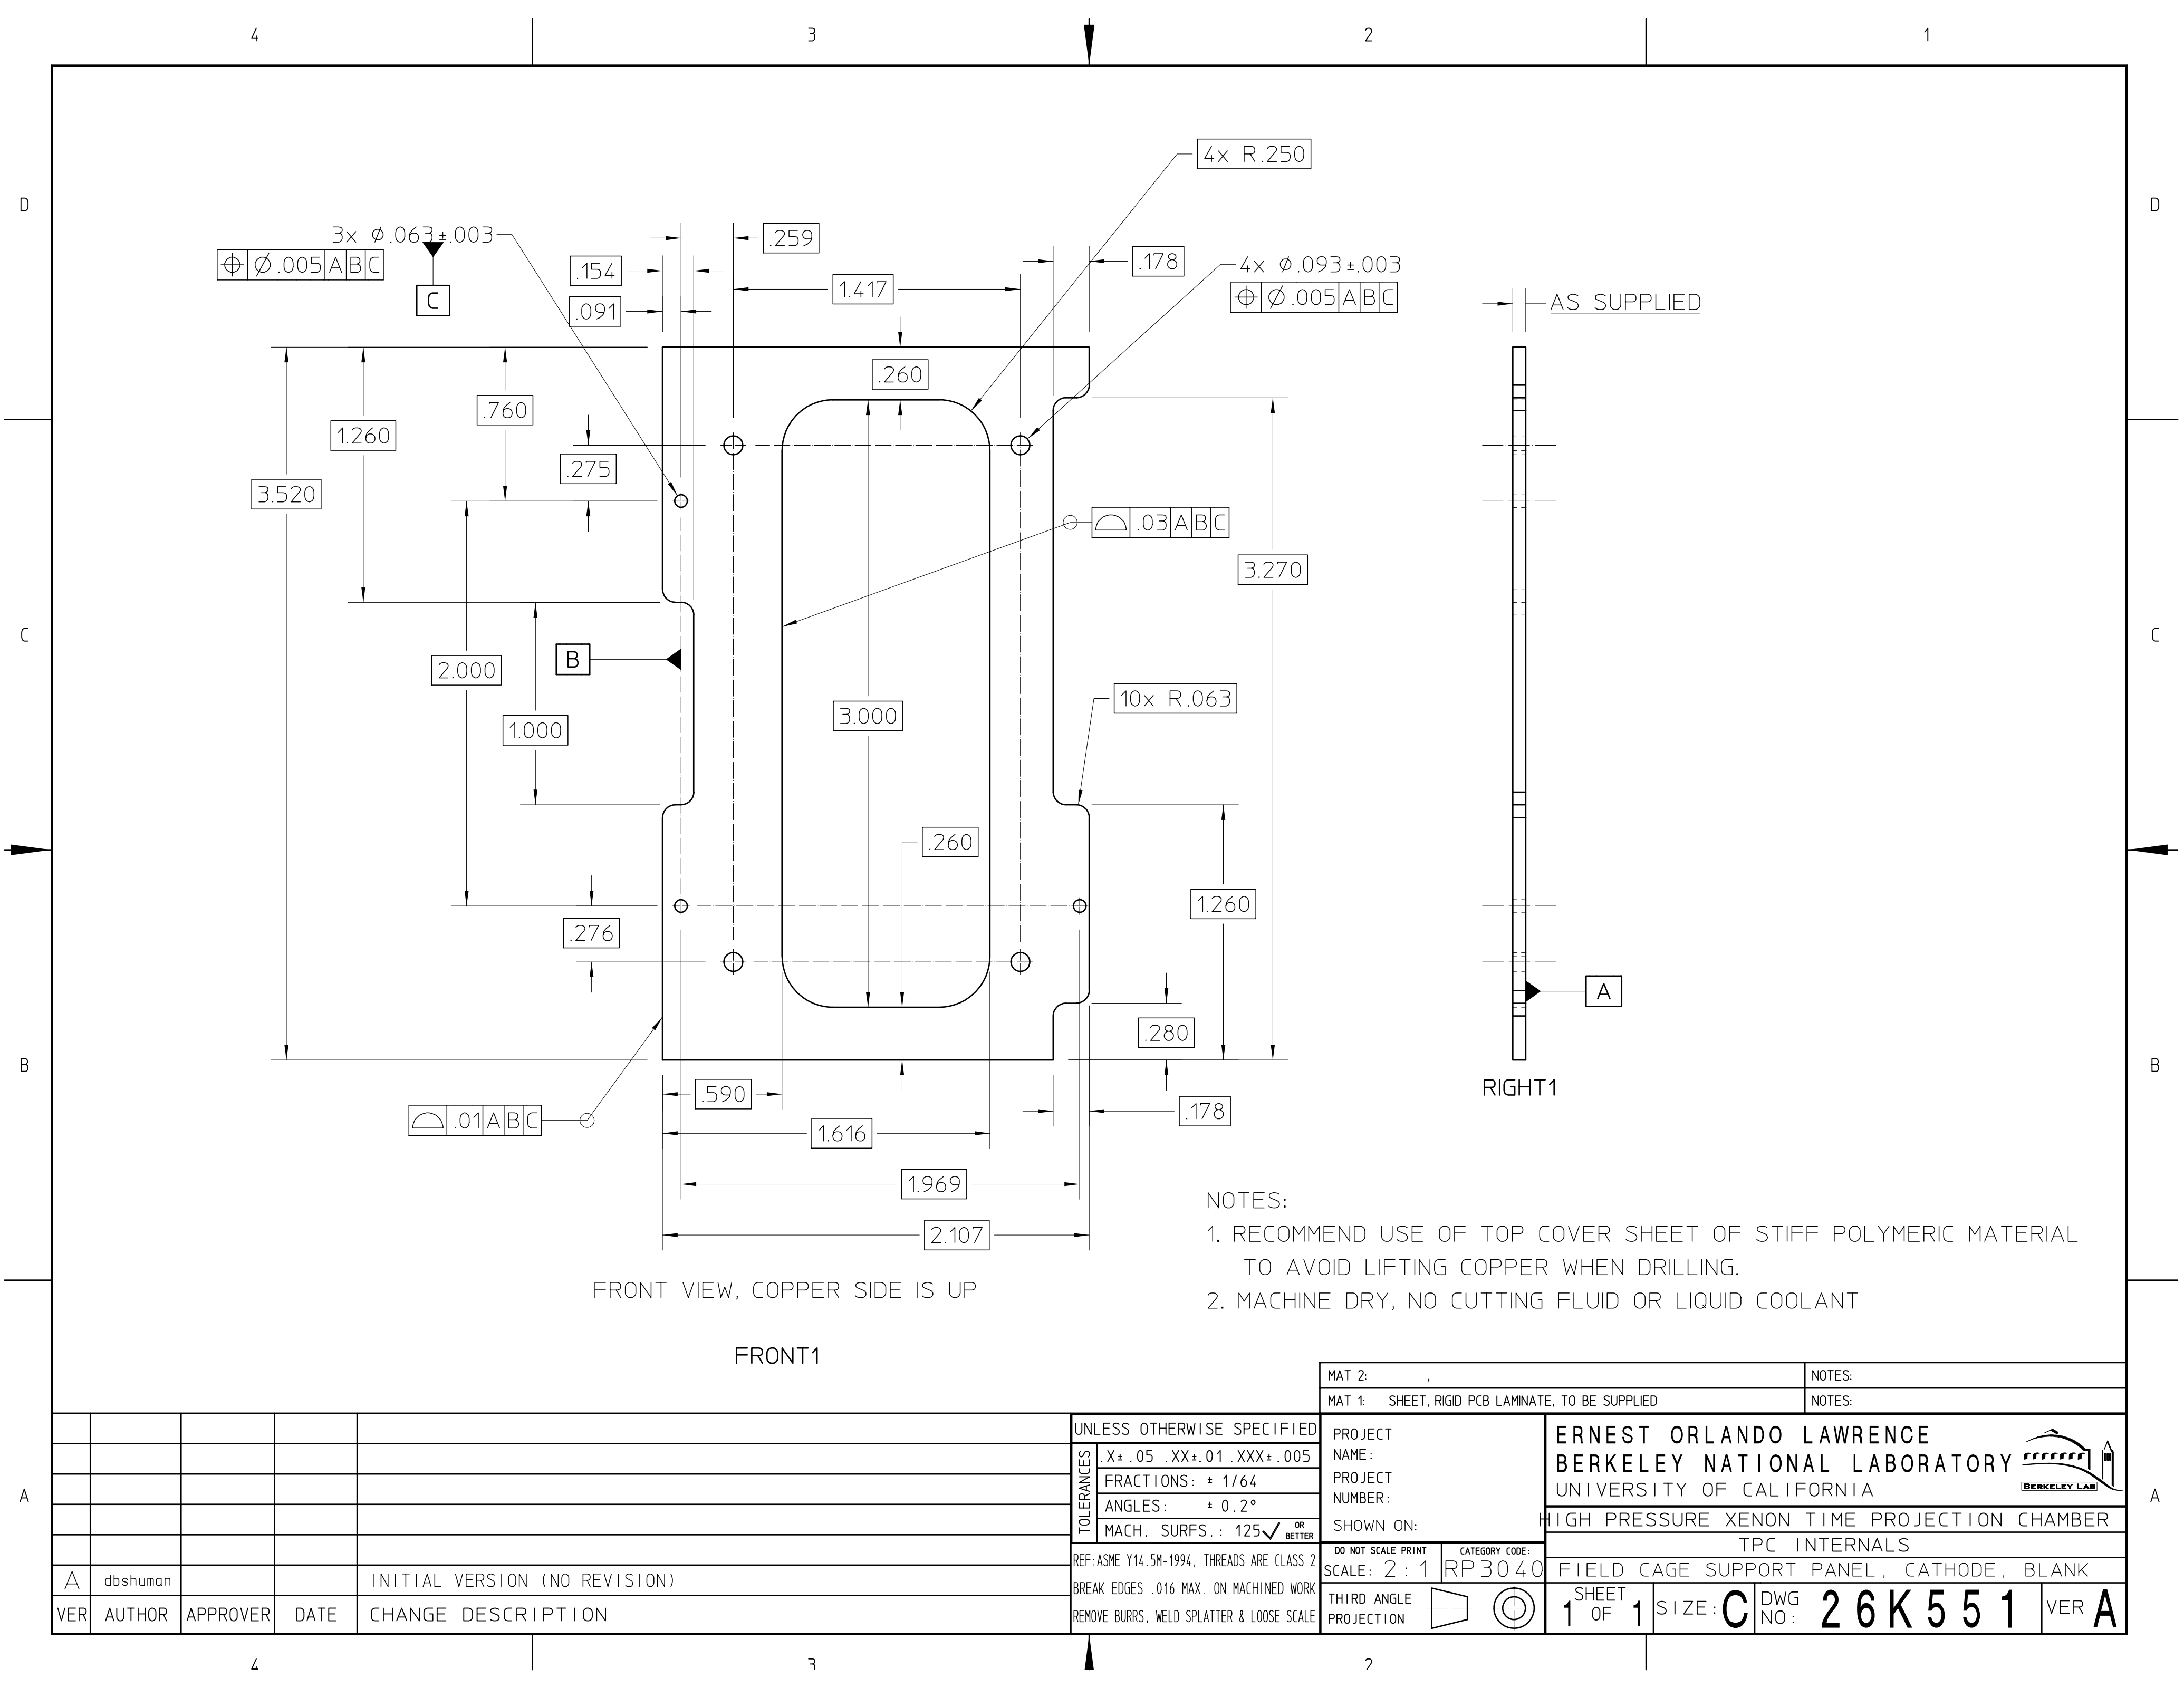

NOTES:

1. RECOMMEND USE OF TOP COVER SHEET OF STIFF POLYMERIC MATERIAL TO AVOID LIFTING COPPER WHEN DRILLING.
2. MACHINE DRY, NO CUTTING FLUID OR LIQUID COOLANT

					MAT 2: .		NOTES:	
					MAT 1: SHEET, RIGID PCB LAMINATE, TO BE SUPPLIED		NOTES:	
					UNLESS OTHERWISE SPECIFIED		PROJECT NAME: ERNEST ORLANDO LAWRENCE	
					TOLERANCES	.X±.05 .XX±.01 .XXX±.005	PROJECT NUMBER: BERKELEY NATIONAL LABORATORY	
						FRACTIONS: ± 1/64	UNIVERSITY OF CALIFORNIA	
						ANGLES: ± 0.2°	HIGH PRESSURE XENON TIME PROJECTION CHAMBER	
						MACH. SURFS.: 125✓ OR BETTER	TPC INTERNALS	
					REF: ASME Y14.5M-1994, THREADS ARE CLASS 2		DO NOT SCALE PRINT	
A	dbshuman			INITIAL VERSION (NO REVISION)	BREAK EDGES .016 MAX. ON MACHINED WORK		CATEGORY CODE: RP 30 40	
VER	AUTHOR	APPROVER	DATE	CHANGE DESCRIPTION	REMOVE BURRS, WELD SPLATTER & LOOSE SCALE		THIRD ANGLE PROJECTION	
							1 SHEET OF 1	
							SIZE: C	
							DWG NO: 26K551	
							VER A	