


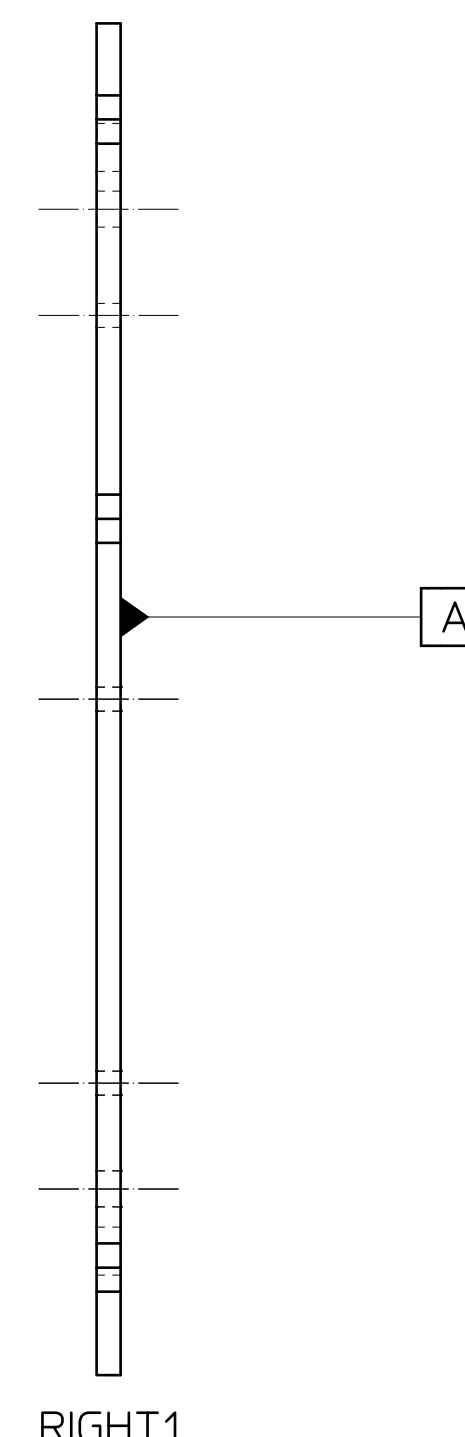

1. RECOMMEND USE OF TOP COVER SHEET OF STIFF POLYMERIC MATERIAL TO AVOID LIFTING COPPER WHEN DRILLING.
2. MACHINE DRY, NO CUTTING FLUID OR LIQUID COOLANT

RIGHT1

					MAT 2: ,		NOTES:	
					MAT 1: , RIGID PCB LAMINATE, TO BE SUPPLIED		NOTES:	
					UNLESS OTHERWISE SPECIFIED		PROJECT NAME:	
					TOLERANCES	.X± .05 .XX±.01 .XXX±.005	ERNEST ORLANDO LAWRENCE	
						FRACTIONS: ± 1/64	BERKELEY NATIONAL LABORATORY	
						ANGLES: ± 0.2°	UNIVERSITY OF CALIFORNIA	
						MACH. SURFS.: 125✓ ^{OR BETTER}	HIGH PRESSURE XENON TIME PROJECTION CHAMBER	
					REF: ASME Y14.5M-1994, THREADS ARE CLASS 2		TPC INTERNALS	
A	dbshuman			INITIAL VERSION (NO REVISION)	BREAK EDGES .016 MAX. ON MACHINED WORK		SUPPORT PANEL BLANK, DRIFT	
VER	AUTHOR	APPROVER	DATE	CHANGE DESCRIPTION	REMOVE BURRS, WELD SPLATTER & LOOSE SCALE		THIRD ANGLE PROJECTION	
					DO NOT SCALE PRINT		CATEGORY CODE:	
					SCALE: 2 : 1		RP3040	
					THIRD ANGLE PROJECTION		SHEET 1 OF 1	
							SIZE: C	
							DWG NO: 26K553	
							VER A	