
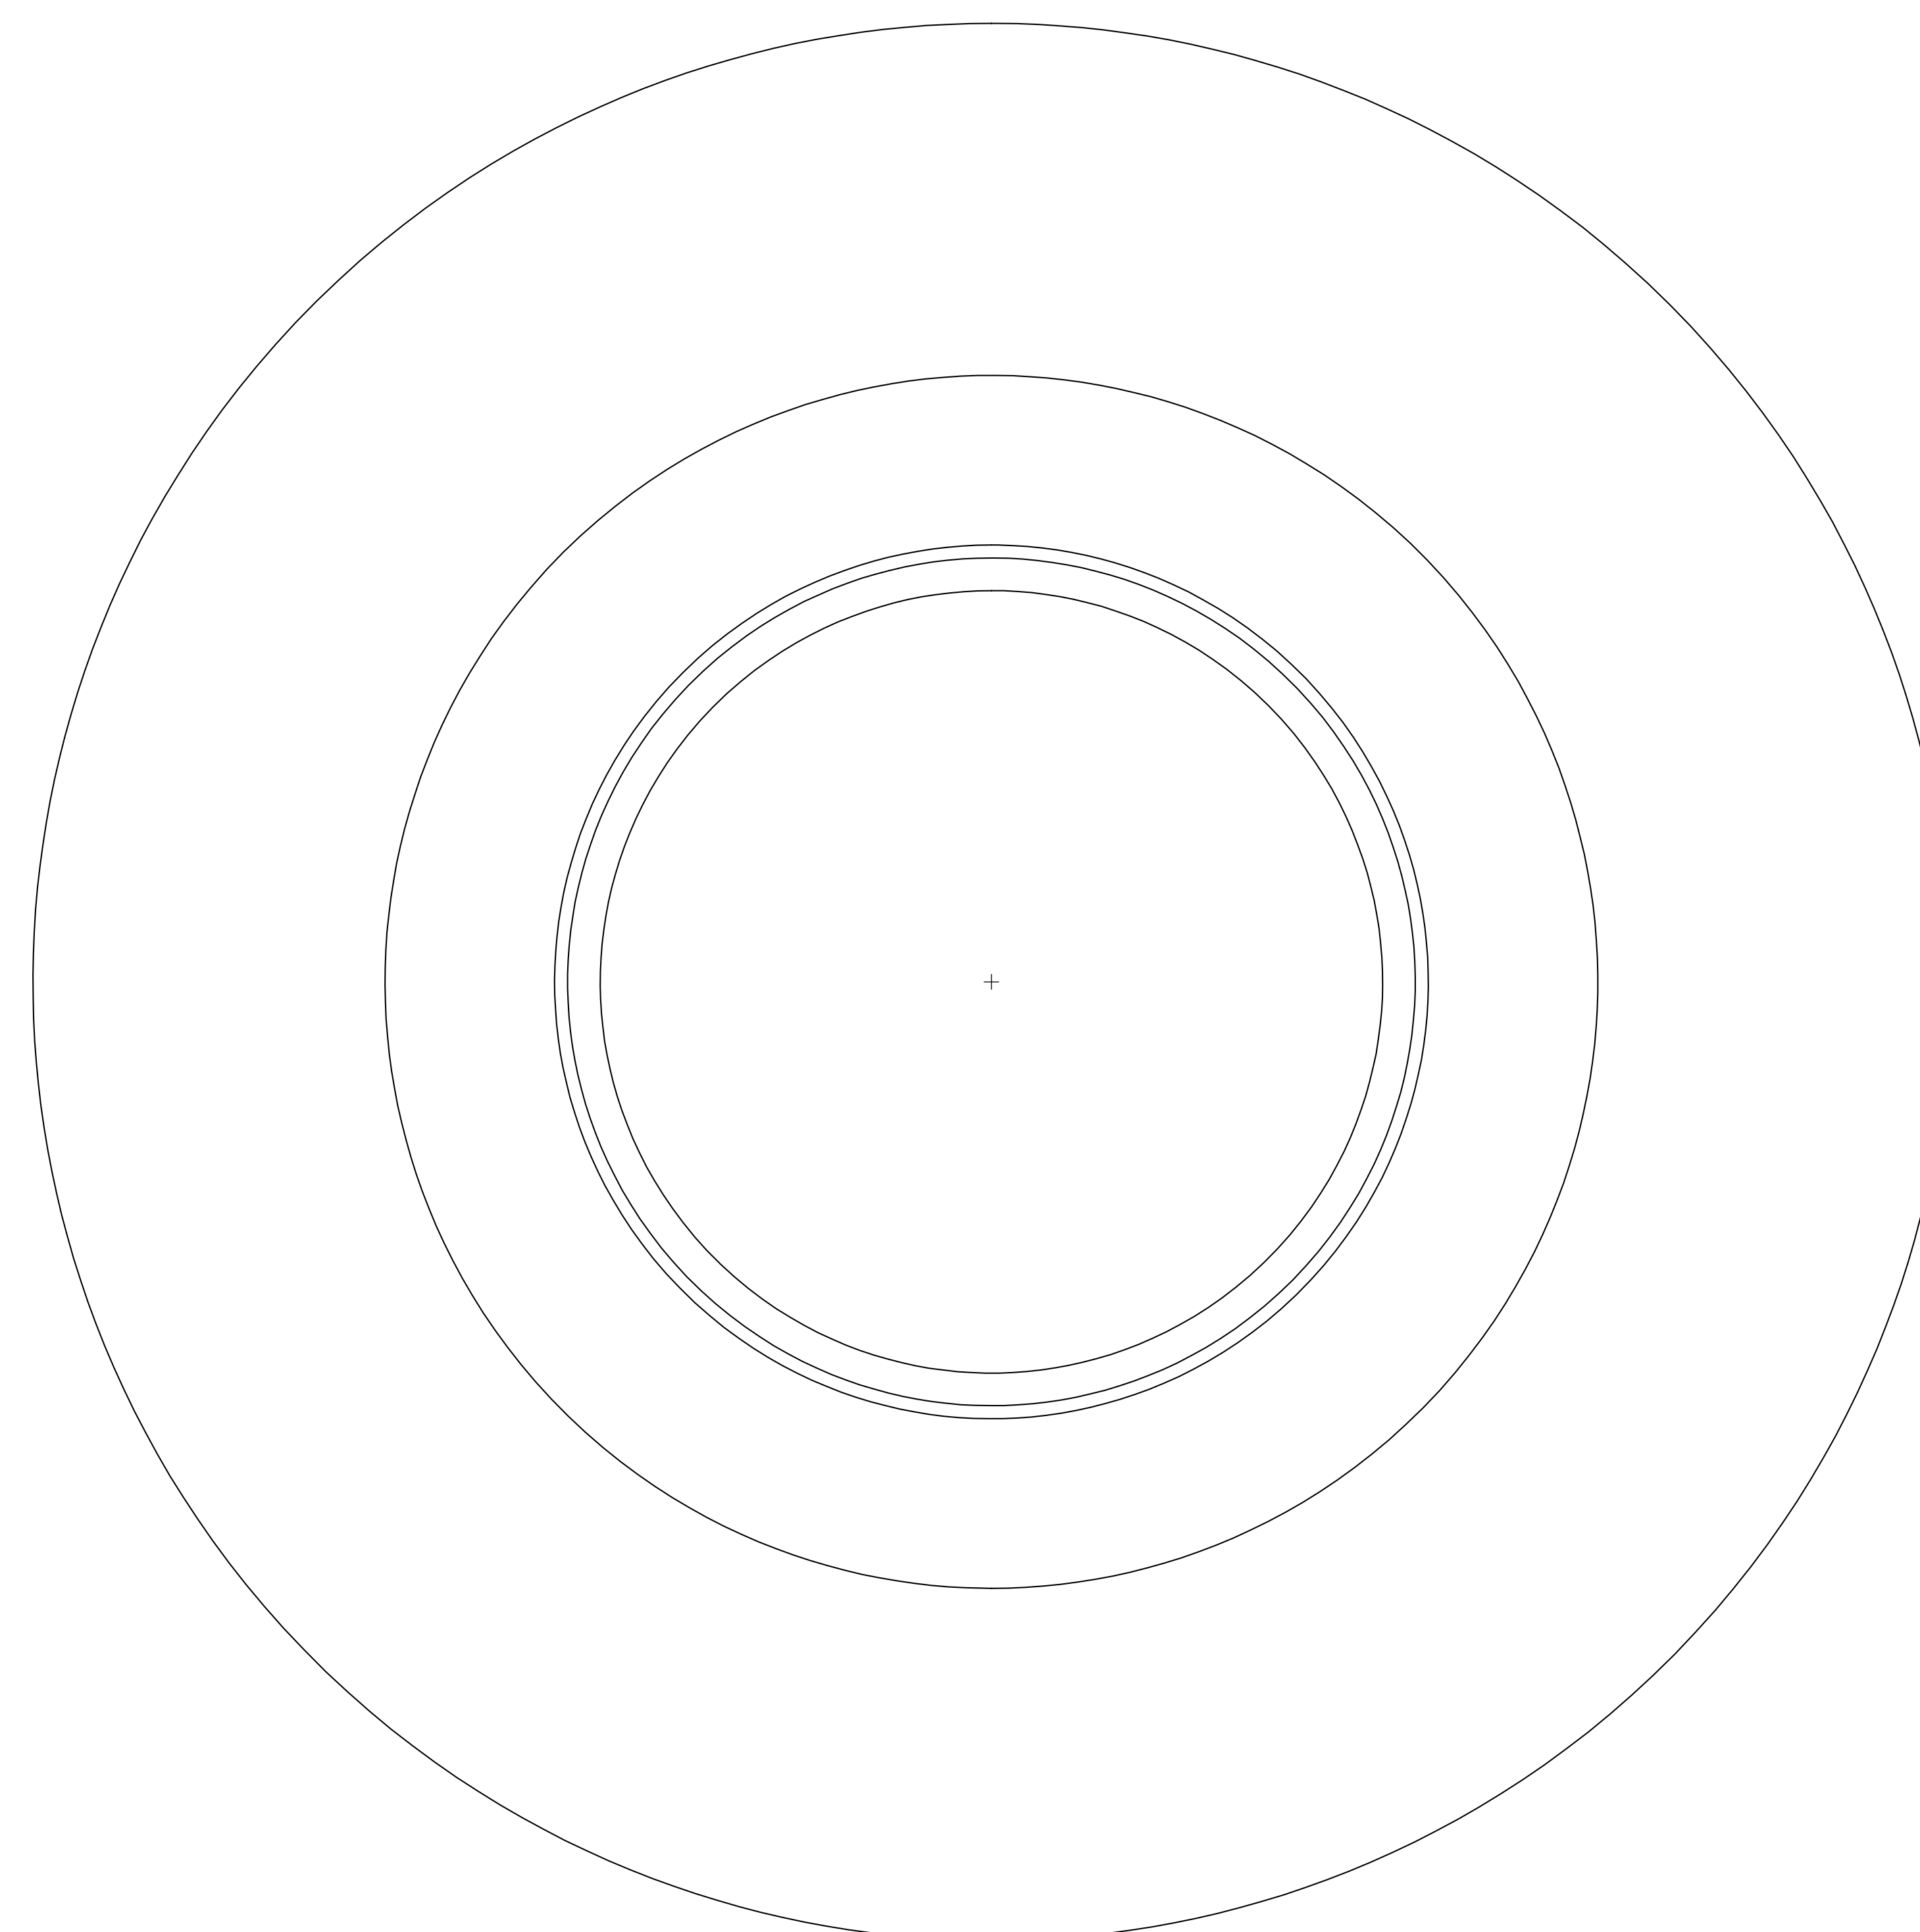


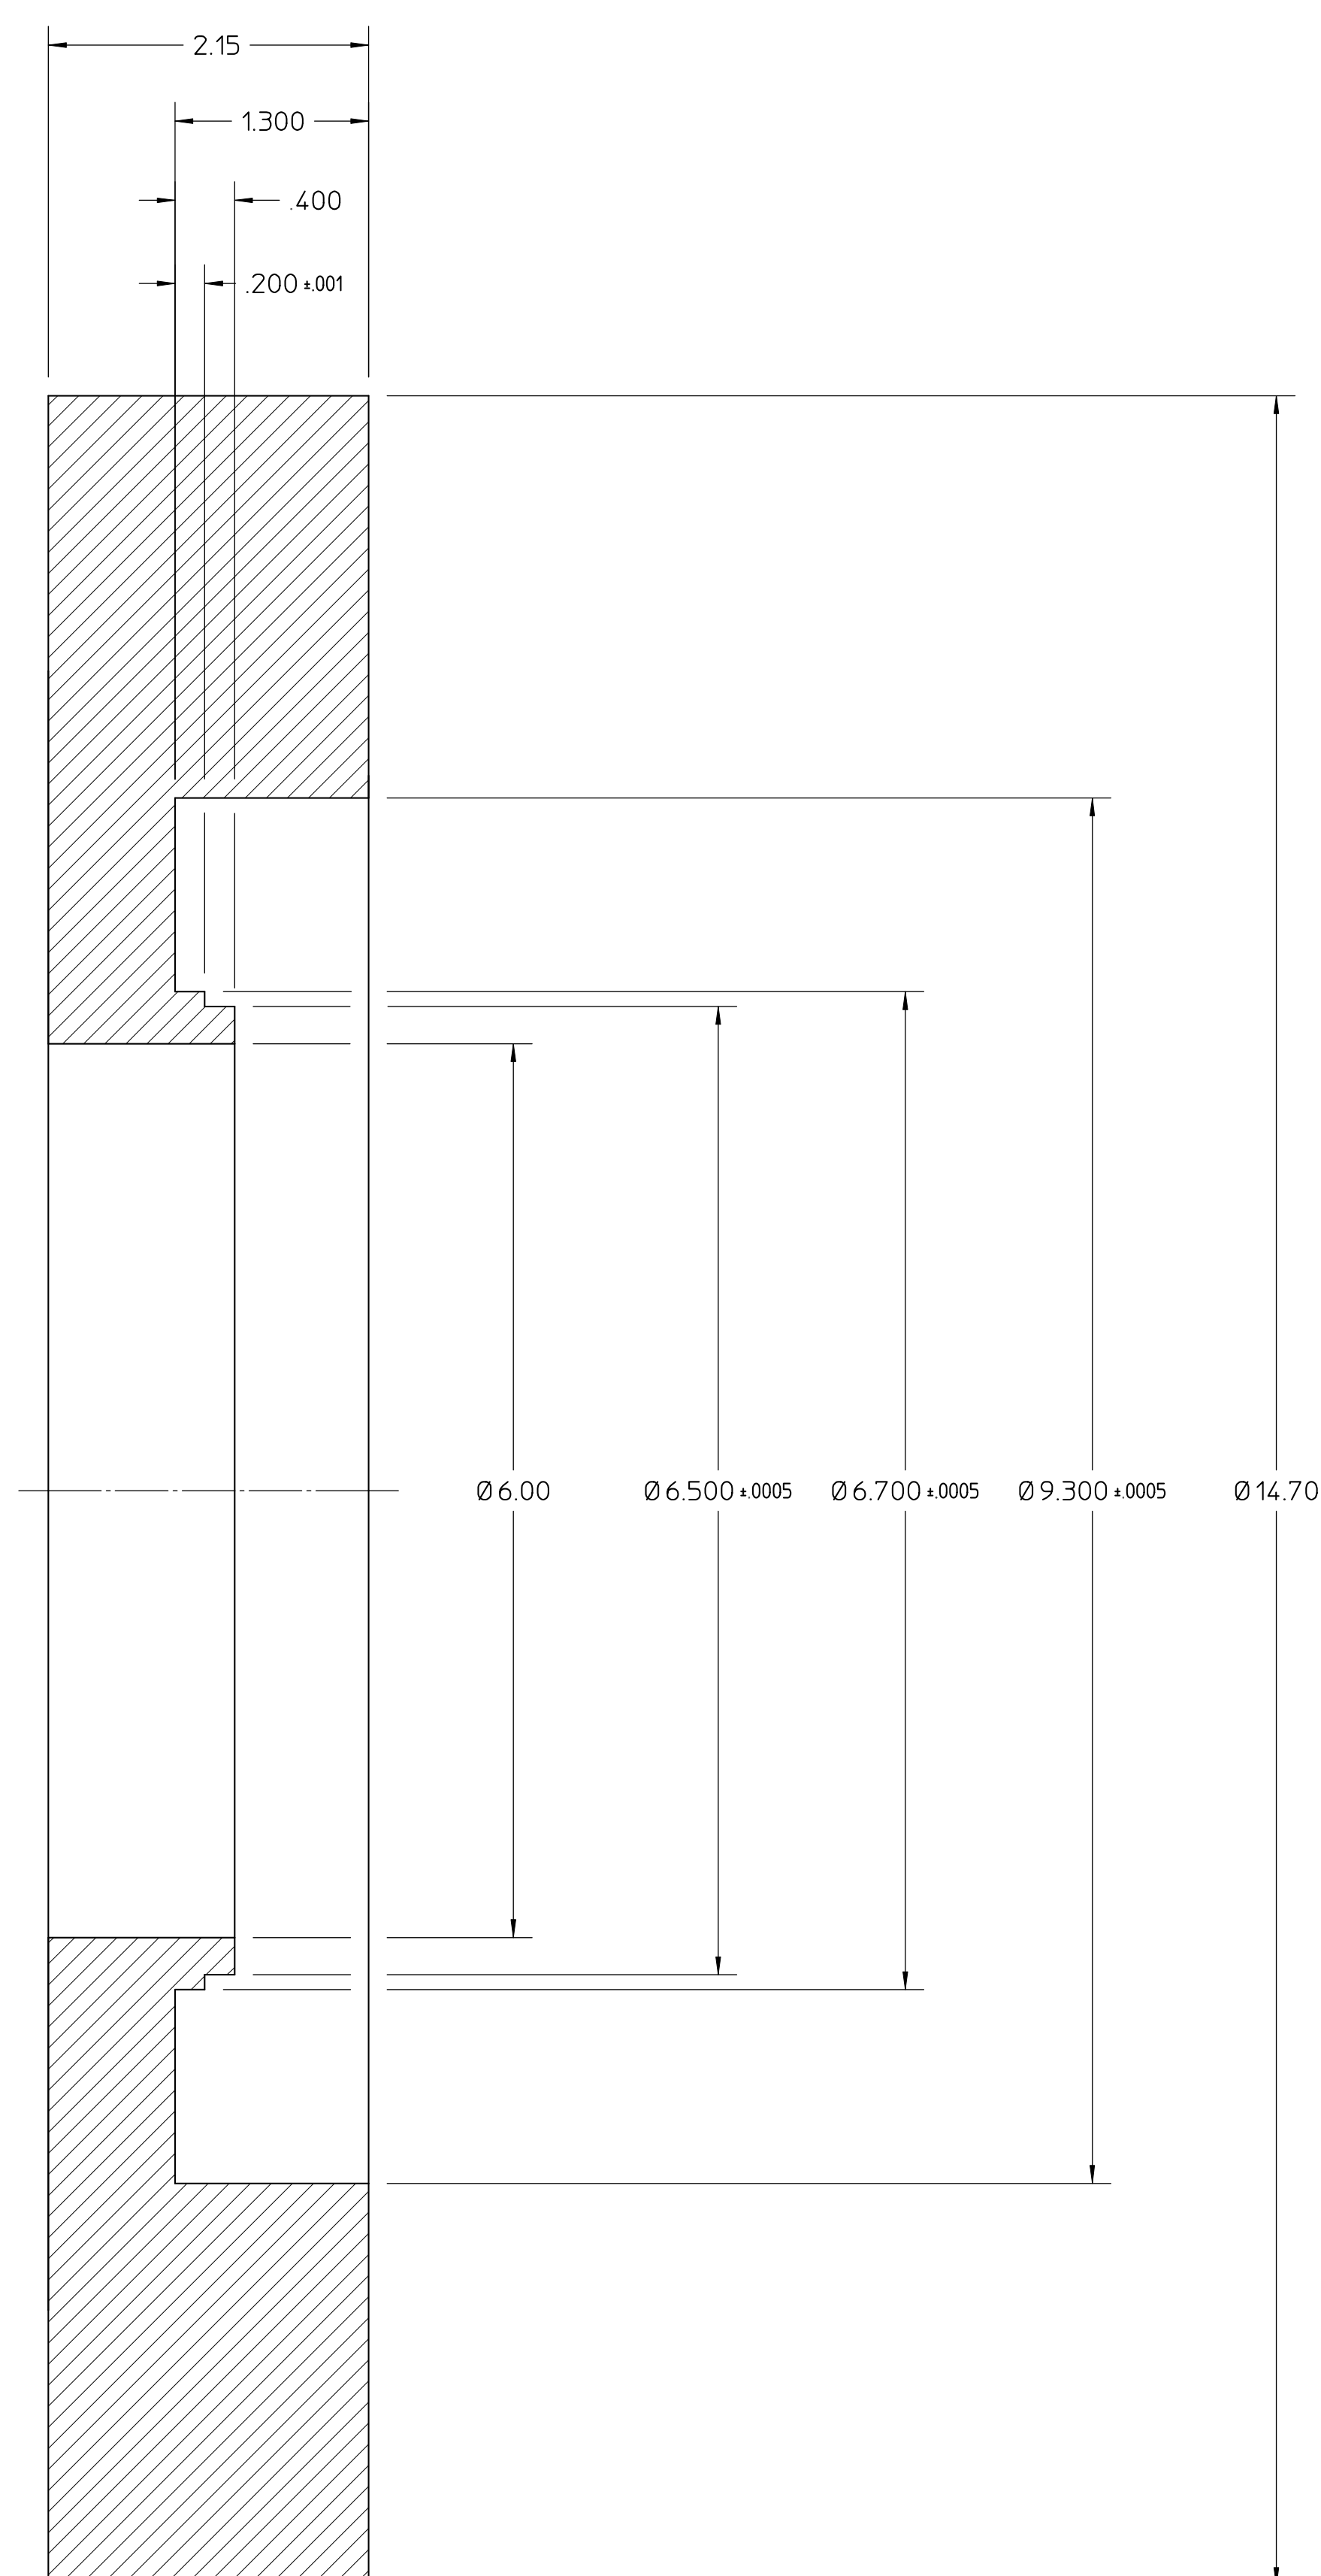

NOTES:

DO NOT USE CUTTING FLUIDS THAT CONTAIN SULFUR.

DO NOT USE ABRASIVES UNDER POWER.

					UNLESS OTHERWISE SPECIFIED					REDUCTION TEMPERATURE					DESCRIPTION				
					ACCT. NO. 1/64 SERIAL NO. DATE 1550 DELIVER TO NO RECD					LAWRENCE BERKELEY LABORATORY UNIVERSITY OF CALIFORNIA-BERKELEY PLASMA APPLICATIONS GROUP MU COOL HP TEST CAVITY									
					X ± 0.1 ANGLES ± 1° MAX ± 0.05 FINISH 125/7					DEGREASE SURFACE TREATMENT CAVITY BODY 2 ROUGH COPPER									
					THREADS ARE CLASS 2 CHAMFER ENDS OF ALL SHEN THREADS 30° ON 1.5 PITCH TWO RELIEF WITH ROUND NISE 100° ON MACHINE CUT THREADS BREAK EDGES 0.016 MAX ON MACHINED WORK REMOVE BURRS WELD SPATTER & LOOSE SCALE REFERENCES: ANSI Y14.5 & B46.1					PATENT CLEAR YES DWG. TYPE 2 MICROFILMED YES DESIGN ACCT. 72MCC2 CATEGORY CODE PA0003									
REV	DWG	CHK	ZONE	DATE	CHANGES					DATE					SCALE				
					3					2					1				