


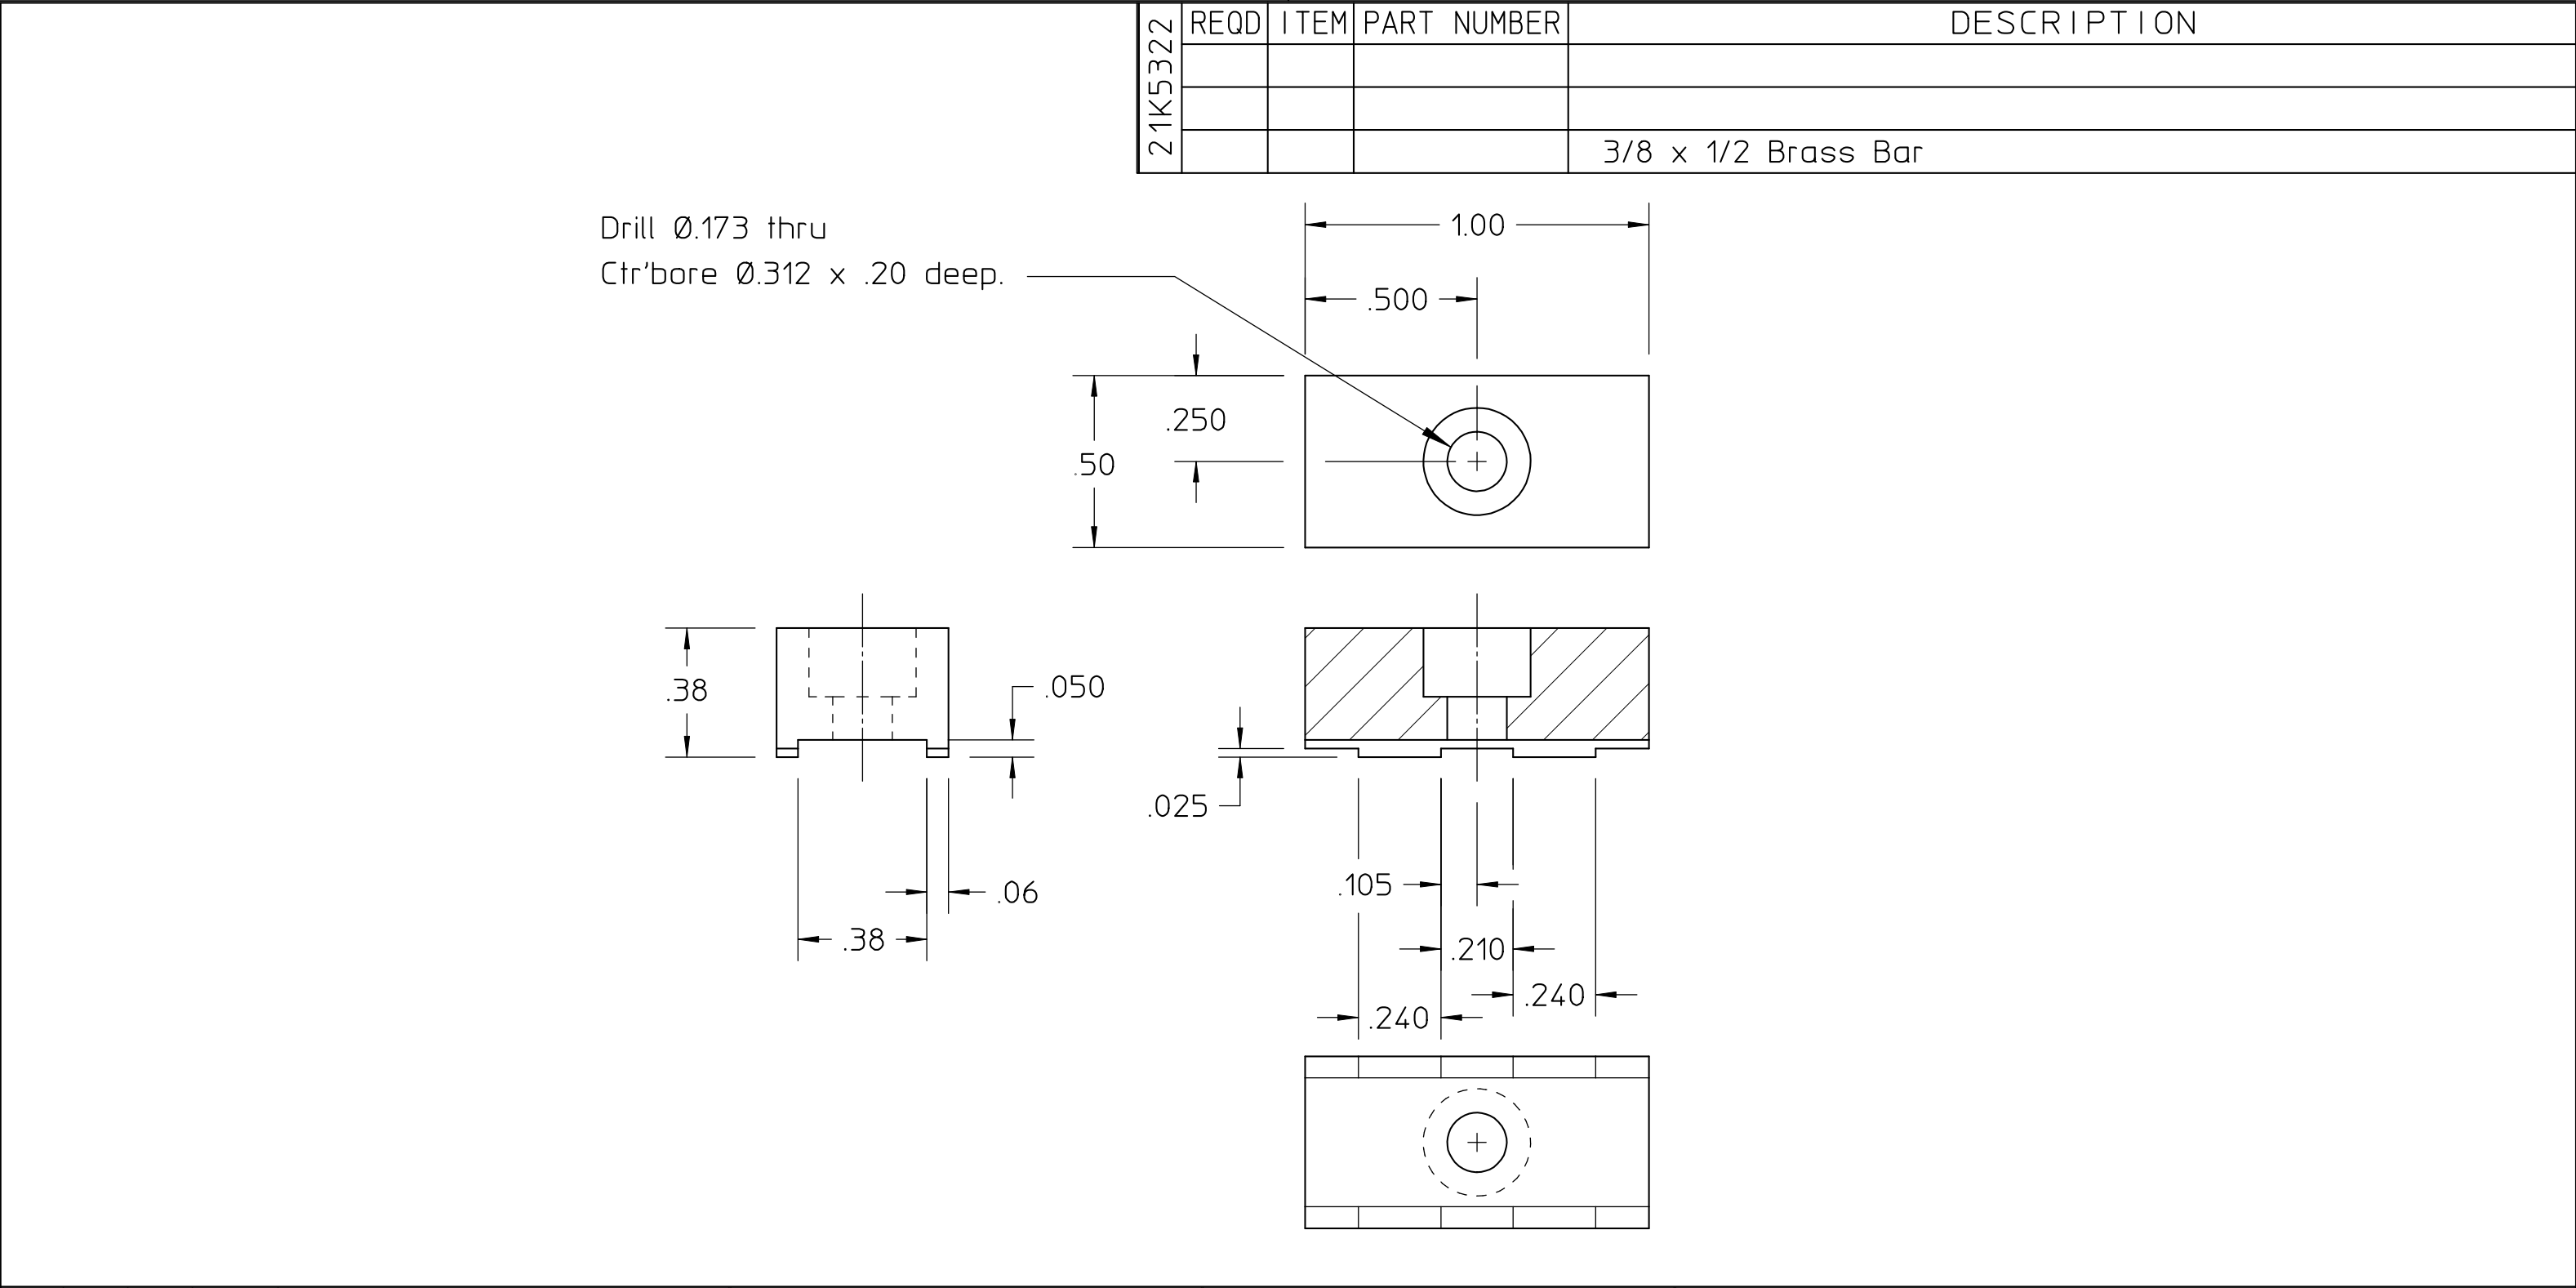

					UNLESS OTHERWISE SPECIFIED	SHOP ORDERS			LAWRENCE BERKELEY LABORATORY					
					TOLERANCE .X ±- .XX ± .01 .XXX ±.005	ACCT NO		SER NO		UNIVERSITY OF CALIFORNIA-BERKELEY				
					SURFACE FINISH 125 ✓	DATE ISSD	DATE REQD	NO REQD		PLASMA APPLICATIONS GROUP				
					1. SAWED, FLAMECUT, SHEARED OR CUT STOCK FINISH. 2. THREADS CLASS 2. 3. CHAMFER ENDS OF ALL SCREW THRDS 30°. 4. 1 1/2 PITCH RELIEF WITH ROUND NOSE TOOL ON ALL MACHINE CUT THRDS. 5. BREAK EDGES 1/64 MAX. ON MACHINE WORK. 6. REMOVE BURRS, LOOSE SCALE AND WELD SPLATTER. 7. REF.-USASI OR ASA STDS SECT Y-14 & B46-1.	DELIVER TO			Mu COOL HP TEST CAVITY					
						SURFACE TREATMENT DEGREASE			COOLING TUBE RESTRAINT-1					
						IDENTIFIC METHOD -			PAT CLEAR	DWG TYPE CD	SHOWN ON 21K5196	SCALE: 2X		
						DWG BY MACGILL		DATE 11-20-00		MICROFILMED	DESIGN ACCT NO 72MCC2	CATEGORY CODE PA0003	DWG NO 21K5322	REV
						CHK BY -		DATE -						
REV	DWN	CHK	DATE	DESCRIPTION										