



REQ	ITEM	PART NUMBER	DESCRIPTION
			.75 x 2.00 ALUMINUM BAR 6061-T6

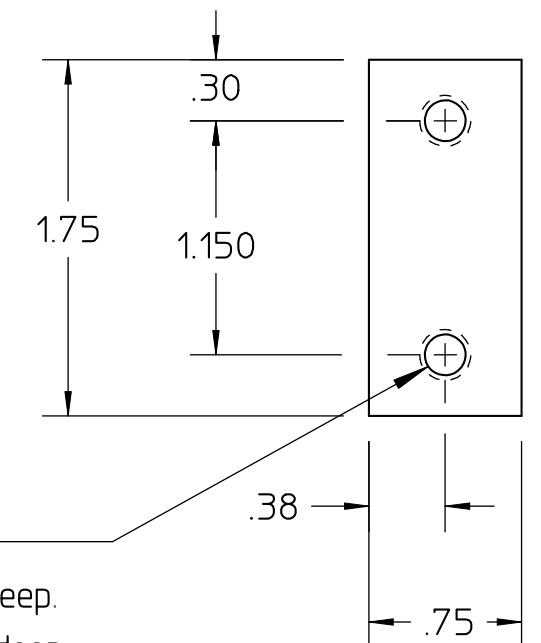

2x each end
4x total _____
Drill Ø.201 x 1.00 deep.
Tap 1/4-20 x .75 deep.

21K5493

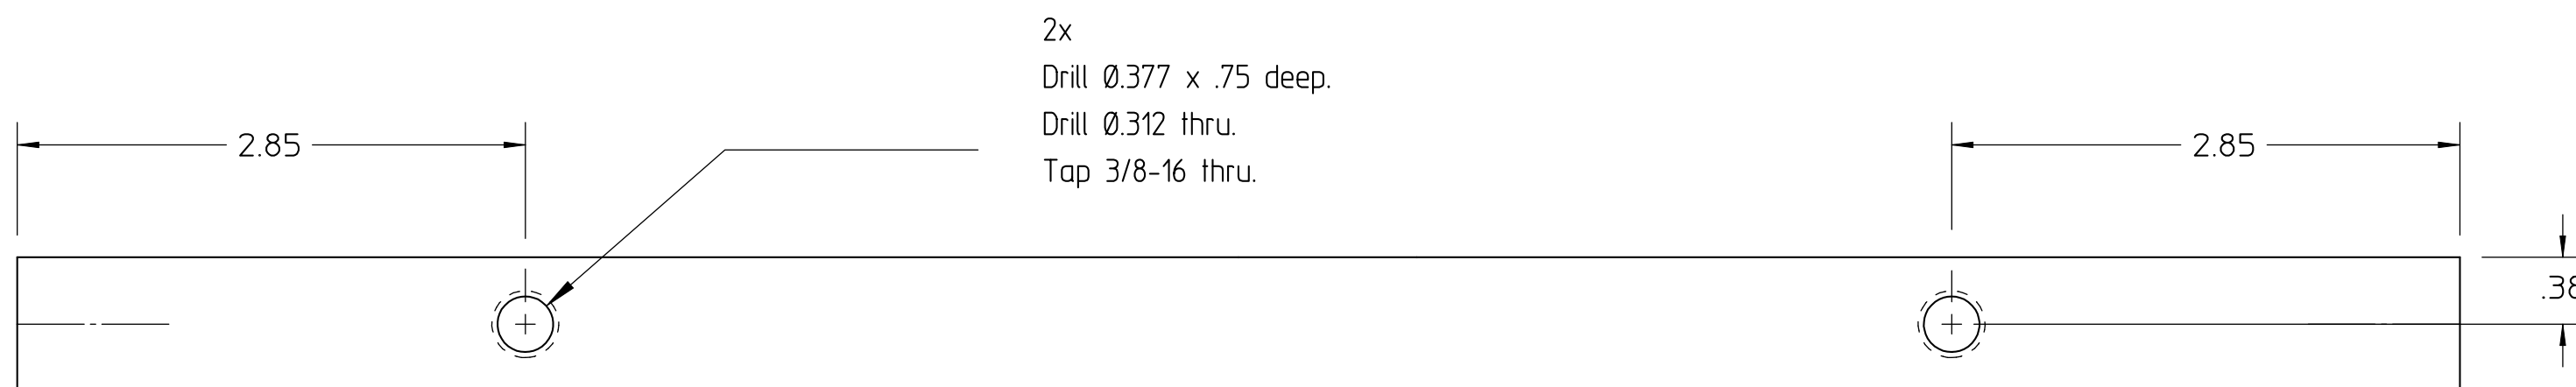

						UNLESS OTHERWISE SPECIFIED	SHOP ORDERS			LAWRENCE BERKELEY LABORATORY						
						TOLERANCES	.X ± -	FRAC. ± 1/64	ACCT. NO.	SERIAL NO.	UNIVERSITY OF CALIFORNIA-BERKELEY					
							.XX ± .01	ANGLES ± .01°	DATE ISSD	DATE REQD.	NO REQD.	PLASMA APPLICATIONS GROUP				
							.XXX ± .005	FINISH 125✓	DELIVER TO			Mu COOL HP TEST CAVITY				
							THREADS ARE CLASS 2 CHAMFER ENDS OF ALL SCREW THREADS 30°. CUT 1.5 PITCH THRD RELIEF WITH ROUND NOSE TOOL ON MACHINE CUT THREADS.		SURFACE TREATMENT DEGREASE			WAVEGUIDE CARRIAGE CROSS BEAM				
						BREAK EDGES .016 MAX. ON MACHINED WORK REMOVE BURRS WELD SPLATTER & LOOSE SCALE REFERENCES: ANSI Y14.5 & B46.1.		IDENT. METH. -			PATENT CLEAR	DWG. TYPE CD	SHOWN ON 21K5473	SCALE FULL	DO NOT SCALE PRINTS	
								DWG. BY: MACGILL		DATE 11-22-00	MICROFILMED	DESIGN ACCT. NO. 72MCC2	CATEGORY CODE PA0003	DWG. NO. 21K5493	SIZE -	REV. -
REV	DWG	CHK	ZONE	DATE	CHANGES			CHK. BY		DATE						