| 标记 | 处数 | 更改文件号 | 签 字 | 日 期 |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |

全部All: 12.5




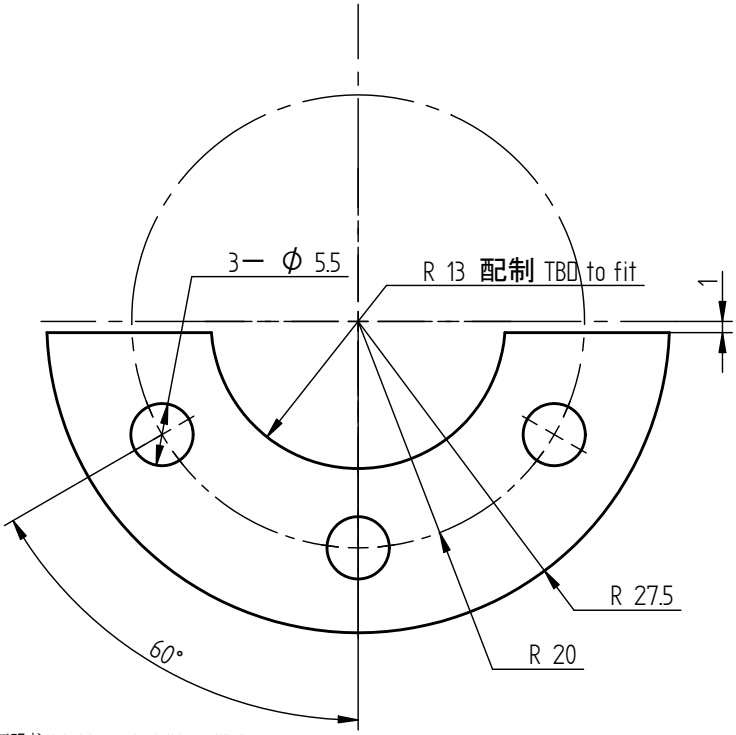


技术要求：
1、材料需提供材质证明书 Material property shall be certified.
2、倒钝锐边，去尖角、毛刺或飞边 Trim sharp edge and deburr.
3、所有元件焊接或装配前需清洁处理，去除油脂、污物、灰尘等，吹干或烘干并干燥保存 Clean all parts before assembling, dry afterwards and keep dry.
4、未注尺寸公差按GB/T1804-2000 m级；未注形位公差按GB/T1184-1996 k级 See title box for un-marked tolerances.

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 设 计 | | | H62 | | | SSRF上海光源 | |
| 绘 图 | | | | | | | |
| 校 核 | | | | | | Φ18热锚组件 | |
| 审 核 | | | 计算机文件名 | | MMSF-0301-1110-03A.dft | | |
| 会 签 | | | 制图软件 | | Solid Edge | Φ18压片 | |
| | | | 数 量 | 重 量 | 比 例 | 图 幅 | |
| 审 定 | | | 2 | 0.03 | 3:1 | A4 | MMSF-0301-1110-03 版本 A |
| 批 准 | | | 共 1 张 | | 第 张 | | |

| REV | AUTHOR | APPROVER | DATE | CHANGE DESCRIPTION |
|---|---|---|---|---|
| A | | | | INITIAL REVISION |

UNLESS OTHERWISE SPECIFIED
TOLERANCES: .0± .25 .00±.125 .000±.050
FRACTIONS: ± -/--
ANGLES: ± -.-°/MM
MACH. SURFS: 125✓ OR BETTER
REF:ASME Y14.5M-1994, THREADS ARE CLASS 2
BREAK EDGES .016 MAX. ON MACHINED WORK
REMOVE BURRS, WELD SPLATTER & LOOSE SCALE

PROJECT NAME: MICE

DO NOT SCALE PRINT SCALE: 1:1
CATEGORY CODE: MU 1025
FRIST ANGLE PROJECTION

ERNEST ORLANDO LAWRENCE BERKELEY NATIONAL LABORATORY
UNIVERSITY OF CALIFORNIA

MUON IONIZATION COOLING EXPERIMENT (MICE)
MICE/MUCOOL SUPERCONDUCTING COUPLING MAGNET
DIA18 CLAMP RING FOR THERMAL ANCHOR ASSEMBLY

SHEET 1 OF 1 | SIZE: 5 | DWG NO: 27H826 | REV A